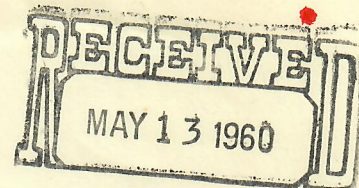
OIL & GAS
CONSERVATION COMMISSIONOIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADOOIL & GAS
CONSERVATION COMMISSION

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator J. Ray McDermott & Co., Inc. Field Mt. Hope E Wildcat
 Lease Name Piper Well No. 1 County Logan
 Location C SE NE Section 29 Township 9N Range 53W Meridian
 (Quarter Quarter)
 feet from Section line and feet from Section Line
 N or S E or W

TOTAL DEPTH 5046'DATE OF PLUGGING 5/11/60

DETAILS OF WORK

PBTD 4998'

Perforations 4968-4974'

Dumped sand and gravel from 4998 to 4950' Placed 5 sack cement plug from 4950 to 4930' Loaded hole w/80 BW Shot casing at 3848' and recovered same. Placed 10 sacks cement at 200' and 5 sacks cement at 25' Plugged and abandoned.

1173' of 5½" casing left in hole. Left at depth of 3872-5045'
 Nothing else left in hole.

AJJ	
DVR	
WRS	✓
HHM	
JAM	
FJP	
JJD	✓
FILE	

PKA gas

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date May 19 1960

Director

Company J. Ray McDermott & Co., Inc. Date 5/11/60Address Drawer 352, Sterling, Colo. Phone No. 1A2-0394By James H. Williams Title Foreman

(Signature)