




00817971

STERLING DRILLING COMPANY
Sterling, Kansas

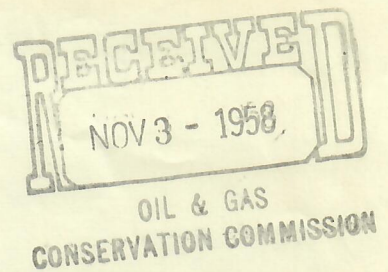

WELL LOG ----- BRITTEN C-2
Located: SW SE SW, Section 7-9N-53W, Logan County, Colorado

OWNER: The British-American Oil Producing Company
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: 9-12-58
COMPLETED: 9-21-58

TOTAL DEPTH: 5170'

LOG

0 - 210	Sand, Gravel & Clay
210 - 280	Clay
280 - 4480	Shale
4480 - 4690	Shale & Lime
4690 - 4860	Lime
4860 - 4876	Shale
4876 - 4886	Silt
4886 - 4920	Shale
4920 - 4975	D Sand
4975 - 5039	Sand & Shale
5039 - 5073	J Sand & Shale
5073 - 5115	Sand
5115 - 5157	Sand & Shale
5157 - 5173	Shale T.D.

CASING RECORD

Set 9-5/8" surface casing @ 212'
with 180 sacks cement.

Set 5-1/2" casing @ 5169' with 150
sacks 50-50 Pozmix.