

OIL AND GAS CONSERVATION COMMISSION  
OF THE STATE OF COLORADO

RECEIVED  
MAY 11 1959



NOTICE OF INTENTION TO DRILL

OIL & GAS  
CONSERVATION COMMISSION


INSTRUCTIONS:

A notice of intention to drill a well shall be filed in duplicate on all Federal and Patented lands, and in triplicate on all State lands. Do not begin operations until approved copy has been received. It is mandatory that the proposed location comply with all rules and regulations of the Commission. Locate well on section grid in proper location, and indicate extent of lease. Unless operations are commenced within 180 days after the date of approval hereof, this approval to drill will become null and void.

Name of Operator United States Smelting Refining and Mining Company Phone No. KE 4-5304  
Address 900 Patterson Building City Denver 2, State Colorado

How is liability secured: Well Bond (Attached) ; Blanket Bond ; Waiver   
(Check one)

Lease Name George Gooch  
Well No. 7-90 #1-4  
Field Name Craig - North Wildcat   
County Moffat

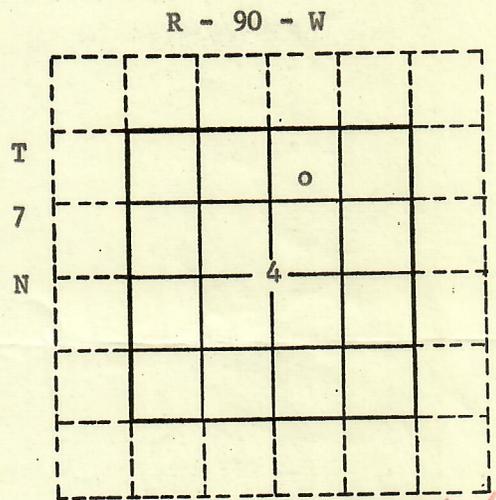

Location NW/4 NE/4 Section 4 Township 7N Range 90W Meridian 6 P.M.  
(quarter quarter)  
630 feet from N Section line and 2099 feet from E Section Line  
N or S E or W

Agent	6 P.M.
Bond	
Spot	
600 ft.	o/c
1200 ft.	
Wells	
Oil	
Gas	
Status	

The well is located on: Patented land  State land  Federal land

The well is located within a spaced area: Yes  No

Distance from proposed location to nearest property or lease line 1 mile plus feet. In excess of 1 Mile  
Distance from proposed location to nearest drilling unit line 630 feet.

Objectives: Lewis Formation Depth 3200' Estimate;                      Formation Depth                      Estimate

Proposed length of surface casing 300 feet.

REMARKS:

The Operator proposes to drill a 3100' Lewis Sand Well to test for oil or gas, the following is a brief outline of the proposed work:  
Casing Program: Surface - 8 5/8" O.D., 24#, at 300' cemented with sufficient cement to circulate.  
Production - 5 1/2" 15.5# csg. at 3200' with sufficient cement to fill annulus 300' above uppermost show of oil or gas.  
Cores and Drill Stem Tests will be taken if warranted. Logs will be run to total depth.

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Date MAY 11 1959

A. J. Prain  
Director

United States Smelting Refining  
Company and Mining Company Date May 8, 1959

Address 900 Patterson Building Phone No. KE 4-5304  
Denver 2, Colorado

By Wright Brodley Title Division Production Supt.  
Signature