


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

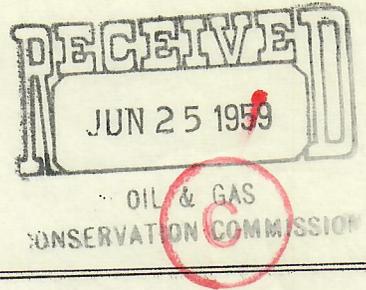

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Halbert & Jennings Field Knoll Wildcat X
Lease Name State Well No. 1 County Logan
Location C SE SW Section 35 Township 8N Range 51W Meridian 6th P.M.
660 feet from S Section line and 1980 feet from W Section Line
N or S E or W

TOTAL DEPTH 4851 DATE OF PLUGGING June, 1959

DETAILS OF WORK

Gravel 4680' - 4590'
20 sacks cement 4590' - 4520'
Loaded hole with mud
Shot 5 1/2" off @ 2344' and pulled
Loaded hole with mud to 163'
20 sack cement 163' - 103'
Filled surface with mud 103' - 25'
7 sacks cement 25' - 3' (below plow depth)
Set required permanent marker
Filled & levelled location
(well plugged by Albert Leach, Sterling, Colorado)

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	

Form 4 approved 4/2/59

Pragas.

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: _____ Date JUN 25 1959
Company Halbert & Jennings Date 6/22/59
Address 1409-1700 Broadway, Denver Phone No. AC 2-7895
By [Signature] Title Agent
Director _____ (Signature)

T