




OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

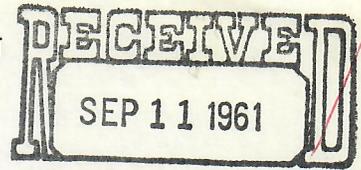

PLUGGING RECORD

OIL & GAS CONSERVATION COMMISSION

121 - 05391

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Regal Drilling Company Field Wildcat X
Lease Name Fate-Mitchell Well No. 1 County Washington
Location C-SW-NW Section 29 Township 3S Range 56W Meridian
1980 feet from north Section line and 660 feet from west Section Line
N or S E or W

TOTAL DEPTH 5218 DATE OF PLUGGING Sept. 4, 1961

DETAILS OF WORK

Type Fluid in Hole: Chemical-Gel (oil added)

Density and viscosity: 9.9# 110

P. H. and fluid loss 9.0 4.2 c.c.

Plugging Proceedure: Filled hole with mud to 158'. Set plug at 158', 1/2 sack hulls and 15 sacks cement. Filled hole to 20' with mud, set plug, 1/2 sack hulls and 10 sacks cement.

9/28/61 checked loc. Hole plugged. HM

Table with 2 columns and 7 rows: AJJ, DVR, WRS, HHM, JAM, FJP, JJD, FILE

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date SEP 13 1961

Director A. J. J... (Signature)

Company Regal Drilling Co. Date 9-8-61

Address 439 Conoco Bldg. Phone No. MA3-6159

By ... (Signature) Title President

