


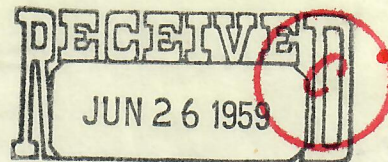

00300731

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADOOIL & GAS
CONSERVATION COMMISSION

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator UTAH SOUTHERN OIL COMPANY Field MAY Wildcat
Lease Name MOYER Well No. 1 County WELD
Location SW SW Section 29 Township 12N Range 56W Meridian 6th
(Quarter Quarter)
330 feet from N Section line and 330 feet from E Section Line
N or S E or W

TOTAL DEPTH 6486' DATE OF PLUGGING May 6, 1959.

DETAILS OF WORK

SET ROCK BRIDGE @ 6131', DUMPED 5 SACKS CEMENT FROM 6131 to 6091',
WORKED CASING, SPOTTED OIL @ 2520', WORKED CASING, SHOT OFF @ 1633',
PULLED CASING, SET ROCK BRIDGE @ 300', DUMPED 10 SACKS CEMENT FROM
300' to 270', MUDDERED HOLE TO 22', RAN 5 SACKS TO SURFACE AND SET MARKER
IN TOP OF CEMENT CAP.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	/
JJD	/
FILE	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date June 26 1959Director A. J. Gersin

Company UTAH SOUTHERN OIL CO. Date
1825 FIRST NATIONAL BANK BLDG.
Address DENVER, COLORADO Phone No. AM-6-3173
By Harry E. McQuinn Title Prod. Supt.
(Signature)