


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

PLUGGING RECORD

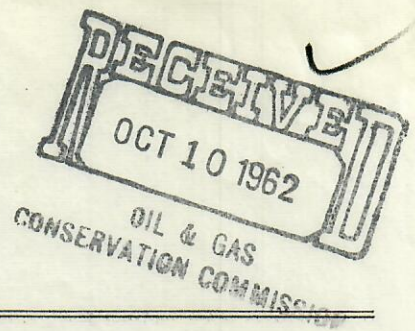

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator TEXACO Inc. Field Tow Creek Wildcat -
 Lease Name Quaintance Hocking Well No. 9 County Routt
 Location NE SE Section 18 Township 6N Range 86W Meridian 6th PM
 (Quarter Quarter)
1634 feet from S Section line and 1020 feet from E Section Line
 N or S E or W

TOTAL DEPTH 2725 KBDATE OF PLUGGING Oct. 4, 1962

DETAILS OF WORK

Pulled tubing. Ran 10 sacks cement plug at 2500'. Shot off casing three times: No. 1 at approx. 2224', No. 2 at 2134' and No. 3 at 2002'. Pulled 2025' of 5½" 14# casing. Ran mud laden water (90 bbls.) and set 10 sack cement plug at surface and erected marker.

Casing left in hole:

Size	From	To
13" 50#	39'	Surface
8-5/8" 24#	822'	Surface
5-1/2" 14#	2641'	2025'

Cement Plugs:

Size	From	To
10 sx	2500'	2420'
10 sx	20'	Surface

DVR	
WRS	
HHM	
JAM	<input checked="" type="checkbox"/>
FJP	<input checked="" type="checkbox"/>
JD	<input checked="" type="checkbox"/>

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Company TEXACO Inc.Date October 5, 1962Date OCT 16 1962Address Box 157 - Craig, Colo. Phone No. 824-6565

Director

By

(Signature)

Title District Supt.

MA/a

OGCC(3)-GRW-HSMcM-ASN

psa oil