

PHONE 522-1206 AREA 303

VIRG'S TESTERS, INC.



00522605

COLORADO

Contractor L & F Drilling Co.Rig No. 2Spot NE-NESec. 20Twp. 15 SRng. 42 WField WildcatCounty CheyenneState ColoradoElevation 4043' K.B.Formation "Atoka" SandTool Open @ 4:50 P M.Flow #1 10 Min. SIP #1 60 Min. Flow #2 30 Min SIP #2 60 Min.Flow #3 Min. SIP #3 Min. Flow #4 Min. SIP #4 Min.B. H. T. 132°Mud Wt. 9.5Top Choke 1"Bottom Choke 9/16"Size Hole 7 7/8"Size Rat Hole NoneSize & Wt. D. P. 1 1/2" 16.60Size Wt. Pipe NoneI. D. of D. C. 2 1/4"Length of D. C. 340'Total Depth 5260'Interval Tested 4984-5016Type of Test Straddle

TOOL SEQUENCE

RECEIVED

AUG 14 1970

COLO. OIL & GAS CONS. COMM.

4984-----

5016-----

TD 5260-----

Operator
ADDRESSWebb Resources, Inc.
See DistributionWell Name and No. Bernal Wallace #20-1
Ticket No. 2587

Date 7-25-70

DSI No. 1
No. Final Copies 14PRD Make Kuster AK-1No. 3811 Cap. 4800 @ 4974

Press Field Corrected

IH A 2614 2463

FH K 2601 2451

Flow #1-IF B 24 29

FF C 24 29

SIP #1 D 871 857

Flow #2-IF E 24 29

FF F 24 29

SIP #2 G 484 469

Flow #3-IF H None Taken

FF I " "

SIP #3 J " "

Pressure Below
Bottom Packer
Bled To

2461

Our Tester: B. J. BobbittWitnessed By: Allan R. Hallock

RECOVERY IN PIPE

DID WELL FLOW - Gas No Oil No Water No6' Rotary mud = .03 Bbl.
No show of oil or gas.1st Flow - Opened with a very weak blow. (Under 1/4" water)
2nd Flow - Dead throughout period.

REMARKS:

Corrected pressures in 6 minute increment readings on following page.




WEBB RESOURCES, INC.
Bernal Wallace #20-1 DST #1 Ticket #2587

Initial Shut-in

6 mins.	39 lbs.
12 "	65 "
18 "	109 "
24 "	177 "
30 "	283 "
36 "	409 "
42 "	539 "
48 "	658 "
54 "	765 "
60 "	857 "

Final Shut-in

6 mins.	46 lbs.
12 "	67 "
18 "	92 "
24 "	123 "
30 "	162 "
36 "	208 "
42 "	267 "
48 "	333 "
54 "	403 "
60 "	469 "

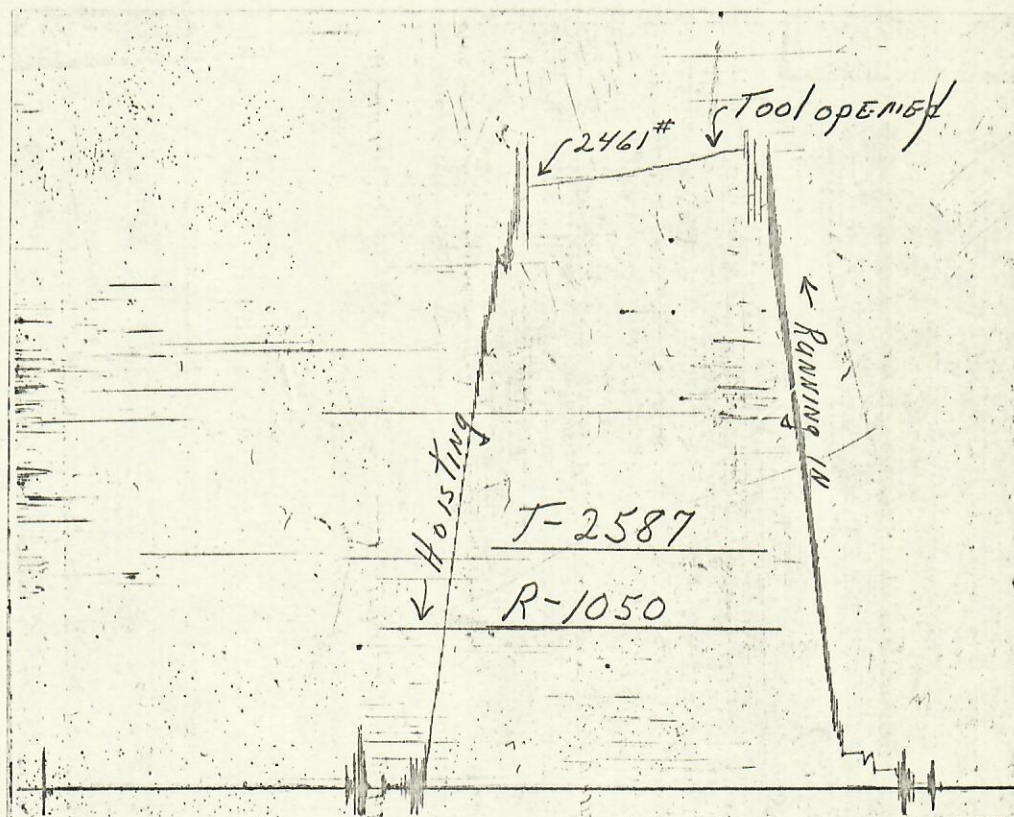

WEBB RESOURCES, INC.

Bernal Wallace #20-1 DST #1 Ticket #2587

This recorder blanked off below the bottom packer and since pressure bled to only 2461 lbs., which is more than the shut-in pressure, the bottom packer held. Recorder No. 1050

Phone 522-1206

VIRG'S TESTERS, INC.

Box 712 - Sterling, Colo.



Fluid Sample Report

Date 7-25-70 Ticket No. 2587

Company Webb Resources, Inc.

Well Name & No. Bernal Wallace #20-1 DST No. 1

County Cheyenne State Colorado

Sampler No. 13 Test Interval 4984-5016

Pressure in Sampler 0 PSIG BHT 132 OF

Total Volume of Sampler: 2250 cc.
 Sample: 2250 cc.
 Oil: None cc.
 Water: None cc.
 Mud: 2250 cc.
 Gas: None cu. ft.
 Other: None

Resistivity

Water: @ of Chloride Content ppm.

Mud Pit Sample .22 @ 70° of Chloride Content 44,000 ppm.

Gas/Oil Ratio Gravity °API @ OF

Where was sample drained Location

Remarks: