




OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

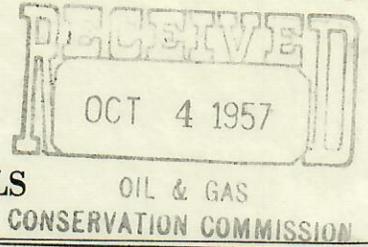

SUNDRY NOTICES AND REPORTS ON WELLS

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recomplate or abandon a well or to change plans. Within thirty (30) days after recompletion, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplate	<input type="checkbox"/>	Report of Remedial Work	<input type="checkbox"/>
Notice of Intention to Change Plans	<input type="checkbox"/>	Report of Recompletion	<input type="checkbox"/>
Notice of Intention to Abandon Well	<input checked="" type="checkbox"/>	Other	<input type="checkbox"/>

(Check appropriate space)

LEASE NAME Frank J. Crom WELL NO. 1

FIELD North Black Hollow Area WILDCAT COUNTY Weld

LOCATION SW SW Section 20 Township 8N Range 66W Meridian 6th P.M.
 (Quarter Quarter)


660 feet from S Section Line and 672 feet from W Section Line
 N or S E or W

(DETAILS OF WORK)

Subject well was drilled to a total depth of 9105', through the Lyons formation and 12' into the Upper Satanka. There were no commercial quantities of oil or gas discovered. The plugging procedure as follows was verbally approved by Mr. D. V. Rogers in phone conversation of 10-1-57 with R. L. Green, Area Superintendent.

1. 50 sacks sloset cement over top of Lyons (Top of Lyons at 9030')
2. 50 sacks sloset cement over top of Muddy (Top of Muddy at 7688')
3. 100 sacks common cement interval 423'-623' (9 5/8" surface casing set at 523')
4. 25 sacks cement in top of surface casing with required marker.

AJJ	
DVR	
FJK	
WRS	
HHM	
AH	
JJD	<input checked="" type="checkbox"/>
FILE	

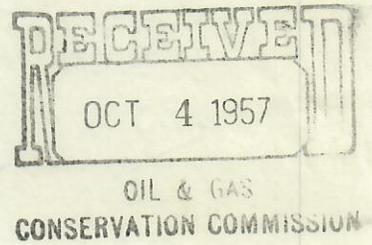

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Date OCT - 4 1957

Director A. J. Jersin

Company The California Company Date 10/2/57

Address Box 1769, Casper, Wyoming Phone No. 2-5303

By Ollie L Wyble Title Lead Petr. Engr.
 (Signature)