



FOR OGCC USE ONLY

Date Received: 11/12/2003  
Doc Num: 1177482

**WELL ABANDONMENT REPORT**

Submit original plus one copy. This form is to be submitted as an intent whenever a plugging is planned on a borehole. The approved intent shall be valid for six (6) months after the approval date; after that period a new intent will be required. After the plugging is complete, this form and one copy shall again be submitted along with third party cement verification as a subsequent report of the work as actually completed.

<b>OGCC Operator Number:</b> 95620	Contact Name and Telephone	<b>24-hour Contact (required)</b>
Name of Operator: <b>WESTERN OPERATING COMPANY</b>	STEVE JAMES	<b>KEVIN LIVELY</b>
Address: 518 17TH ST STE 1680 ATT	Phone: 303 893-2438	Tel: 970 522-6747
City: DENVER State: CO Zip: 80202	Fax: 303 629-5735	

**API Number:** 05-075-08346 00 **OGCC Lease No.:** \_\_\_\_\_ **Other wells in this lease?** \_\_\_\_\_

**Well Name:** SWEDLUND **Well Number:** 1

**Location (QtrQtr, Sec, Twp, Rng, Mer):** SWNW Sec 4 T 9N R 53W PM 6

**County:** LOGAN **Federal, Indian, or State Lease Number:** \_\_\_\_\_

**Field Name:** WIND SONG **Field Number:** 93610

Attachment Checklist	Doc Num

**Notice of Intent to Abandon**

**Only Complete the Following Background Information for Intent to Abandon**

**Reason for Abandonment:** PRODUCTION

**Casing to Be Pulled:** Yes **Top of Casing Cement:** 4100

**Fish in Hole:** No

**Wellbore has Uncemented Casing Leaks:** No

**Details:** \_\_\_\_\_

**Current and Previously Abandoned Zones**

Formation code	Perf Top	Perf Bottom	Date Abandoned	Method of Isolation	Plug Depth
DSND	4813	4846		NONE	

**Casing History**

Casing String	Casing Size	Casing Depth	Cement Top	Stage Cement Top
SURF	8 5/8	125	0	
1ST	5 1/2	4955	4100	

**Plugging Procedure for Intent and Subsequent Report**

CIBP # 1: Depth **4750** ft. with **2** sacks cement on top. NOTE: Two(2) sacks cement required on all CIBPs.

Set **40** sacks cement from **750** ft. to **650** ft. in **OPEN HOLE**

Set **50** sacks half in, half out surface casing from **175** ft. to **75** ft.

Set **10** sacks at surface.

Cut all casing strings four feet below ground level, weld on plate **Dry-Hole Marker:** No

Set \_\_\_\_\_ sacks in rat hole. Set \_\_\_\_\_ sacks in mouse hole.

**Additional Plugging Information for Subsequent Report Only**

**Casing Recovered:** \_\_\_\_\_ ft. of \_\_\_\_\_ inch casing. **Plugging Date:** \_\_\_\_\_

**\*Wireline Contractor:** \_\_\_\_\_ **\*Cementing Contractor:** \_\_\_\_\_

**Type of Cement and Additives Used:** \_\_\_\_\_ **\*Attach Job Summaries**


I hereby certify that the statements made in this form are, to the best of my knowledge, true, correct, and complete.

**Print Name:** STEVE JAMES **Signed?** \_\_\_\_\_ **Title:** OPERATOR **Date:** 11/12/2003

**OGCC Approved:** DIMATTEO, ED *Ed Dimatteo* **Title:** *Regulator* **Date:** 11/12/2003

**CONDITIONS OF APPROVAL, IF ANY:**  
48 HR PA NOTICE REQUIRED. CONTACT KEVIN LIVELY @970-522-6747

0 AMP. SHORT NORMAL 10

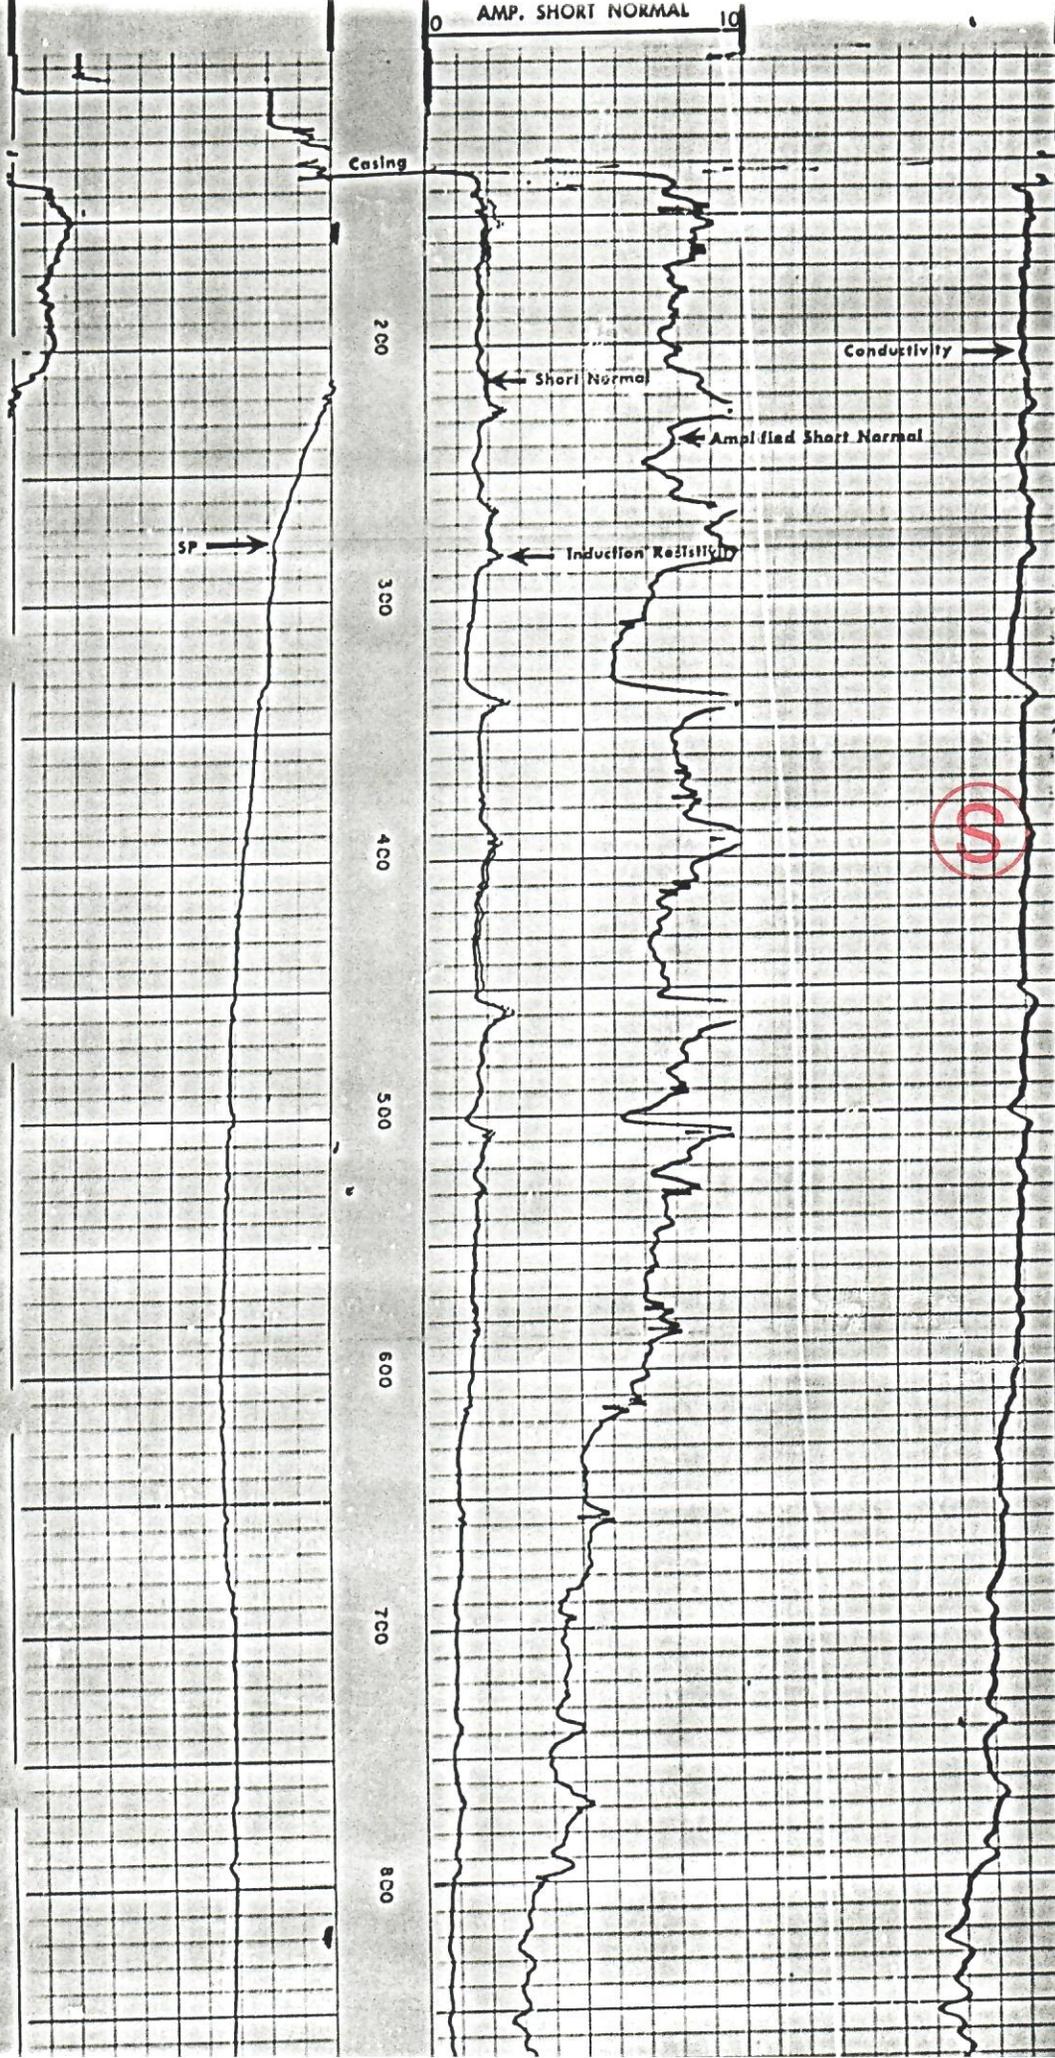



Selected Items Report

Oil and Gas Wells Selected					
Filter Results by Formation <input type="text" value="Include"/> <input type="button" value="Filter"/>					
WELL DESCRIPTION	LOCATION	WELL INFORMATION			
Facilities Selected					
FACILITY DESCRIPTION	LOCATION	PIT INFORMATION			
		Type	Unlined	Status	
Water Wells Selected					
Filter Results by Depth <input type="text" value="Greater than"/> <input type="button" value="Filter"/>					
WELL DESCRIPTION	LOCATION	WELL INFORMATION			
		Depth	Top Perf	Bottom Perf	Aquifer
Receipt=9045355, Permit=0082925--, STERLING BOAT CLUB INC.	NWNW 2 9N-53W	337	0	0	GW
Receipt=0425863A, Permit=0208152--, ALLEY GEORGE W	SESE 4 9N-53W	350	0	0	GW
Receipt=0425863B, Permit=0208152--A, ALLEY GEORGE W	SESE 4 9N-53W	0	0	0	GW
Receipt=9045171, Permit=0072351--, TURNER FRANK	SWNE 7 9N-53W	275	0	0	GW
Receipt=0506946B, Permit=0250938--, ERICKSON CHARLES W	SWSE 7 9N-53W	300	0	0	GW
Receipt=9043124, Permit=0006741--, BROWN TOM	NENE 10 9N-53W	360	0	0	GW
Receipt=0028539, Permit=0197765--, CO DIV PARKS & REC	SWNW 10 9N-53W	605	345	585	GW
Receipt=0506946A, Permit=0250925--, ERICKSON CHARLES W	NENW 17 9N-53W	30	0	0	GW
Receipt=0311192, Permit=0157256--, SIMMS LAWRENCE	SWNE 28 10N-53W	460	440	460	GW
Receipt=9044317, Permit=0026094--, SIMMS LAWRENCE	NESE 28 10N-53W	206	0	0	GW
Receipt=9043369, Permit=0010136--, TIEDGEN ROBERT	SWNE 34 10N-53W	350	0	0	GW