

Blac Frac Tanks, Inc.
808 County Road 215
Parachute, CO 81635

Plugging Report for Delsco/ COGCC. Anderson 4-21

August, 2020 Thursday

Plug #1 CIBP at 10,280', capped with 2 sks cement.

Plug #2 EOT at 7700'

Mixed and pumped 40 sks type 2 cement, (8.2 bbls slurry at 15.4 ppg) Displaced with 27.5 bbls water circulating pressure 500 psi at 3 bpm.

August 7, 2020 Friday

Plug #3 Perf 4675' CICR at 4625'

Mixed and pumped 100 sks Type 2 cement. (20.5 bbls cement slurry) @ 15.4 ppg. Displaced with 13.3 bbls water. 500 psi at 2 bpm. Left 25 sks on top of retainer.

Plug #4 perfs at 3198' CICR at 3148'

Injection test 300 psi at 3 bpm. Mixed and pumped 40 sks, Type 2 cement (8.2 bbls cement slurry) at 15.4 ppg. Displaced with 11.7 bbls water.

Sting out and leave 5 sks on top of retainer. 0 psi at 3 bpm end of displacement.

Plug #5 Perf 2310', CICR 2260'.


Injection test 700 psi at 3 bpm. Mix and pump 100 sks type 2 cement, (20.5 bbls slurry at 15.4 ppg.) Displaced with 4.1 bbls water, final 3 bpm at 700 psi. left 25 sks cement on top of CIBP.

August 10, 2020 Monday

Plug #6 Perf at 599'

Mix and pump 215 sks type 2 cement. (46.5 bbls cement slurry) at 15.4 ppg. With full returns. to surface thru braden head with 10 sks left in mixer. SWI, cleaned up equipment. RD to move.

Mixed and pumped 505 sks type 2 cement.

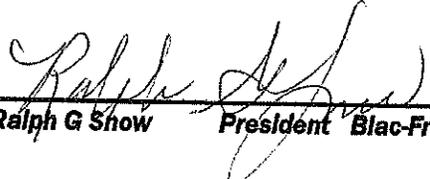

Ralph G Show President Blac-Frac Tanks, Inc 8/25/20