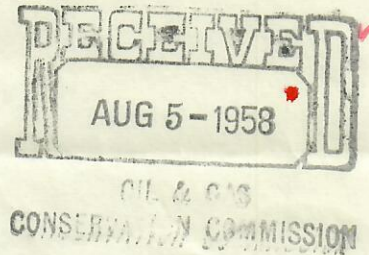


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator United States Smelting Refining and Mining Company Wildcat ☒
Lease Name Mobley Well No. 1-22 County Moffat
Location SW/4 SE/4 Section 22 Township 8 North Range 91 W Meridian 6 P.M.
(Quarter Quarter)
660 feet from S Section line and 2040 feet from E Section Line
N or S E or W

TOTAL DEPTH 6143' DATE OF PLUGGING July 30, 1958

DETAILS OF WORK

Spudded well July 13, 1958. Ran 397' 9 5/8" 36# J-55 set at 412' K.B. Cemented with 340 sacks cement. Drilled to total depth 6143' Drillers, 6142' Schlumberger. No cores or tests. Ran logs. No shows of oil or gas. Plugging detail: Filled hole with heavy mud. Plug #1 420-320' with 40 sacks cement. Plug #2 50' to surface with 10 sacks cement. Plugged and abandoned July 30, 1958.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: AUG - 5 1958 Company United States Smelting/ Refining and Mining Co. Date August 1, 1958
Date _____ Address 900 Patterson Building Phone No. KE r-5304
Director A. J. Jossin By George S. Anderson Title _____
(Signature)
Manager - Denver Oil Operations