


333-6

COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS

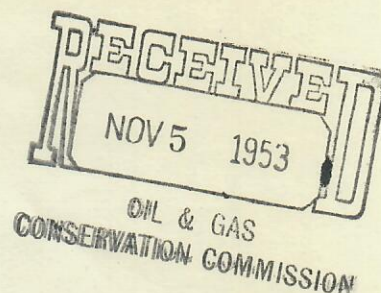

(Indicate nature of data by checking below)

Notice of intention to drill _____
 Notice of intention to change plans _____
 Notice of date for test of water shut-off _____
 Report on result of test of water shut-off _____
 Notice of intention to re-drill or repair well _____
 Notice of intention to clean out well _____
 Statement of shooting _____
 Statement of perforating _____
 Notice to pull or otherwise alter casing _____
 Notice of intention to abandon well _____
 Report of work done on well since previous report _____
 Notice of Intention to Commingle zones*. X

Following is a (notice of intention to do work) November 4 1953
 (~~report of work done~~) (On land) ~~(patented)~~ described as follows:

<u>Colorado</u>	<u>Logan</u>	<u>Mt. Hope</u>
State	County	Field
<u>17</u>	<u>C.F. Green 'B'</u>	<u>NW/4</u>
(Well No.)	(Lease)	(Sec. and $\frac{1}{4}$ Sec.)
<u>9N</u>	<u>53W</u>	<u>-</u>
(Twp.)	(Range)	(Meridian)

The well is located 1000 ft. (X) of North Line and 1003 ft. (E) of _____
 (S) (W)
West Line of NE/4, Section 19-9N-53W.

The elevation above sea level is 4244 ft.

Details of Plan of Work: (State names of and expected depths to objective sands:
 Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cement-
 ing points, and all other important proposed work.)

Captioned well was completed as a Dakota sandstone producer on 1-14-53. Pumped 82 barrels
 oil, 4 barrels water, in 24 hours from perforations 5012-5019 feet. Present production
 is 20 barrels oil, trace of water in 24 hours.

We propose setting bridge plug between Muddy and Dakota reservoirs and perforating the
 casing opposite the Muddy at approximately 4910 to 4914 feet. After testing Muddy plug
 will be drilled out.

Production will be commingled from the Dakota 5012-5019 feet and from the Muddy 4910-4914'.

Formation Tops:
 Muddy 4907'
 Dakota 5005'

Approved: NOV 5 1953

Company Shell Oil Company

Address Denham Building, Denver, Colorado

By J. Roche

Title Division Production Manager

Submit reports of proposed work, for approval, on this form in Duplicate for patented
 lands and in Triplicate for school and state lands.

* Application in accordance with hearing of November 3, 1953.