


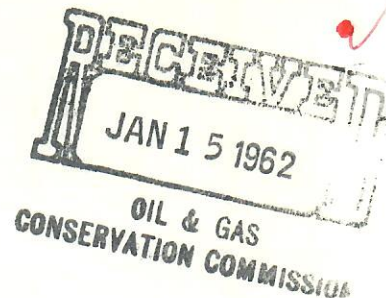

99999999

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

075-06505

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator A. T. Skaer Field No. Mt. Hope Wildcat
Lease Name J. F. Kirk Well No. 4 County Logan
Location NW NW SE Section 18 Township 9N Range 53W Meridian 6th
(Quarter Quarter)
2,310 feet from S Section line and 2,310 feet from E Section Line
N or S E or W

TOTAL DEPTH 5,032 feetDATE OF PLUGGING 12/27/61

DETAILS OF WORK

Moved in Donnelly Casing Pulling Company. Checked in for total depth. Dumped 120 gallons sand filled up to 4,951', loaded hole with water, plug didn't hold. Ran 25 gallons sand and filled up to 4,907'. Dumped 5 sacks cement and filled up to 4,876'. Loaded hole, plug held. Shot off casing at 3,797', pulled 113 joints of 5½" O.D. Casing, mudded hole to 100'. Dumped in rock bridge at 100' to 90', dumped 10 sacks cement, filled up to 72', mudded up to 11' and ran 5 sacks cement. Cut off surface pipe 4' below plow depth, welded steel plate over surface casing.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
FILE	



00817857

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Company A. T. Skaer, et al. Date 1/10/62Date JAN 16 1962Address 3250 Monaco Parkway Phone No. K EA 2-8641
Denver, ColoradoDirector A. J. GersinBy A. T. Skaer
(Signature)

Title