



99999999

123-057 37  
DRILLERS LOG

REC'D OCT 28 1957

COMPANY Plains Exploration Co.  
LEASE Hoffman-Government #1  
LOCATION NE NE Sec. 2-9N-57W, Weld County, Colo.  
DATE COMMENCED 10-12-57  
DATE COMPLETED 10-22-57  
TD 6200

SURFACE CASING: Ran 8 jts, 152', 8VT,  
28.80¢ surface casing.  
Set at 162' RDB. Cemented  
with 102 sacks reg. with  
2% CC. Plug down at  
11AM 10-13-57.

PLUGGING DATA: Plug #1 - 100' - 110' with  
15 sks. reg.  
Plug #2 - 17' - 2' below  
GL with 5 sks. reg.  
Completed at 3:30 PM  
10-21-57.


From	To	Formation
0	115	sand, shale, Bentonite
115	3432	shale
3432	4280	shale, shells
4280	5148	shale
5148	5363	shale, Niobrara
5363	5633	Niobrara
5633	5761	shale, lime
5761	6000	shale, lime, sand
6000	6028	sand
6028	6069	sand, shale, siltstone
6069	6120	"J" sand
6120	6161	sand
6161	6200	sand, shale

BEST IMAGE  
AVAILABLE


We certify that the above is true and accurate, to the best of our knowledge  
and belief, according to our driller's daily drilling report.

DON JOHNSTON DRILLING CO.

*Viola Waltman*  
Viola Waltman  
Secretary-Treasurer

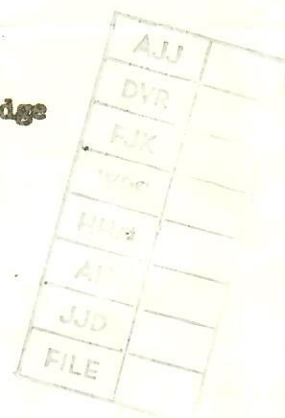

cc: geol. dept - 10.29.57



CONSERVATION COMMISSION



00788488

for OGCC - 11-12-57