




00255163

**OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO**

SUNDRY NOTICES AND REPORTS ON WELLS

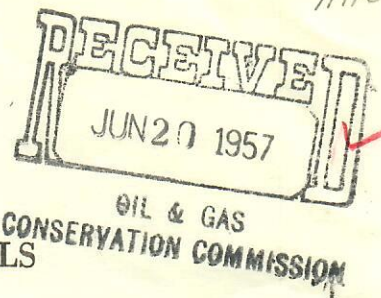

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recomplete or abandon a well or to change plans. Within thirty (30) days after recompletion, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplete

☐

Report of Remedial Work

☐

Notice of Intention to Change Plans

☐

Report of Recompletion

☐

Notice of Intention to Abandon Well

☒

Other


☐

(Check appropriate space)

LEASE NAME RAMEY WELL NO. 5FIELD Walker WILDCAT COUNTY LoganLOCATION NW NE, NE Section 21 Township 9 N Range 53 W Meridian 6PM
(Quarter Quarter)335 feet from North Section Line and 915 feet from East Section Line
N or S E or W

(DETAILS OF WORK)

This well completed as a "J" sand producer in June 1952. By November of 1956 production had decreased to 3 barrels oil and 105 barrels water per day and has been shut in since December 1, 1956 as it is considered unable to produce above the economic limit. Since there is no other productive zones it is proposed to plug and abandon. Well to be plugged by dumping sand and gravel in hole and cap with 5 sax cement to shut off casing perforations. Shoot Casing off at approximately 4000 feet and salvage all possible. Fill hole with heavy mud to 200', set rock bridge at 200' and cap with 10 sax cement which will plug hole into surface casing, fill with heavy mud to approximately 15' and place 5 sax cement plug in top of surface casing, erect marker, fill cellar with soil, level and abandon location.

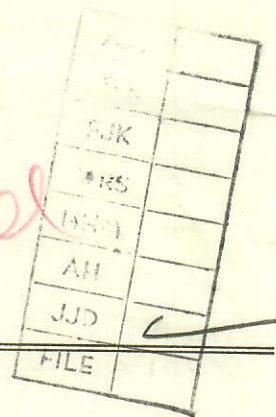

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

JUN 20 1957

Company British-American Oil Date June 10, 1957

Date

Address Box 180, Denver, Colo Phone No. AC 2 9401Director A. J. GarrisonBy Thomas W. Hoge Title Dist. Supt.
(Signature)