

Colorado Oil and Gas Conservation Commission
 1136 Speer Blvd.
 Denver 4, Colorado
 OFFICE OF STATE OIL INSPECTOR
 SUNDRY NOTICES AND REPORTS OF WELLS
 LOCATED ON PRIVATE LANDS

162-B
 (C)



(Indicate nature of data by check) **BEST IMAGE AVAILABLE**

- Notice of intention to drill _____
- Notice of intention to change plans _____
- Notice of date for test of water shut-off _____
- Report on result of test of water shut-off _____
- Notice of intention to re-drill or repair well _____
- Notice of intention to clean out well _____
- Statement of shooting _____
- Statement of perforating _____
- Notice to pull or otherwise alter casing _____
- Notice of intention to abandon well _____
- Report of work done on well since previous report _____

SUBSEQUENT REPORT OF ABANDONMENT

OCTOBER 19 51

Following is a ~~(report of work done)~~ (patented) described as follows:

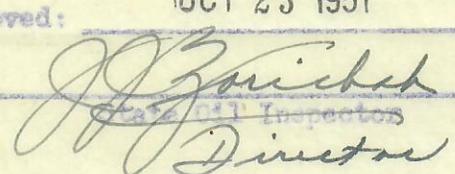
COLORADO	LOGAN	WALKER BLOCK				
State	County	Field				
2	RAMEY	21	NW/4	9N	53W	
(Well No.)	(Lease	(Sec. and 1/4 Sec.)	(Twp.)	(Range)	(Meridian)	


The well is located 1650 ft. (N) of N LINE and 330 ft. (E) of W LINE

The elevation above sea level is 4167 ft.

Details of Plan of Work: (State names of and expected depths to objective sands; Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

Well Spudded May 21, 1951.- TD 5048' reached May 30, 1951.
 Surface Casing, 9-5/8" set at 218' KB W/160 sax cement circulated to surface
 Schlumberger Electric Log to 5047'. -"D" Sand 4820', "J" Sand 4926'
 DST #1, 4972' to 4982' straddle packer. Received 280' muddy water, 720' mud.
 DST #2, 4930' to 4976' straddle packer. Received 390' Rotary mud.
 DST #3, 4982' to 5048'. Received 2900' water & 25' Rotary mud.
 DST #4, 4970' to 4980', straddle packer. Received 90' muddy water & 25' mud.
 Pumped heavy mud to bottom, placed 10 sax cement plug in top of surface pipe, erected steel marker in cement plug.
 Well plugged and abandoned June 3, 1951.

Approved: OCT 23 1951

 State Oil Inspector
 Director

Company British-American Oil Prod. Compan
 Address Box 620, Casper, Wyoming.
 By 
 C. Wm. Evelyn Jr.
 Title District Superintendent.

Submit reports of proposed work, for approval, on this form in Duplicate.