


**Well:** Anderson #MB 33-6  
**API:** 05-013-06415  
**Operator** Extraction Oil & Gas Inc  
**County** Boulder  
**State** Colorado  
**Field** Wattenberg  
**Location:** SENW 33 2N 69W  
**SHL:** 1790' FNL 1980' FWL  
**Elevation:** 5161' GR 5171' KB  
**Spud Date:** 08/20/1993  
**TD Date:** 08/26/1993

**Log Tops**

Niobrara      7385'  
Codell        7620'

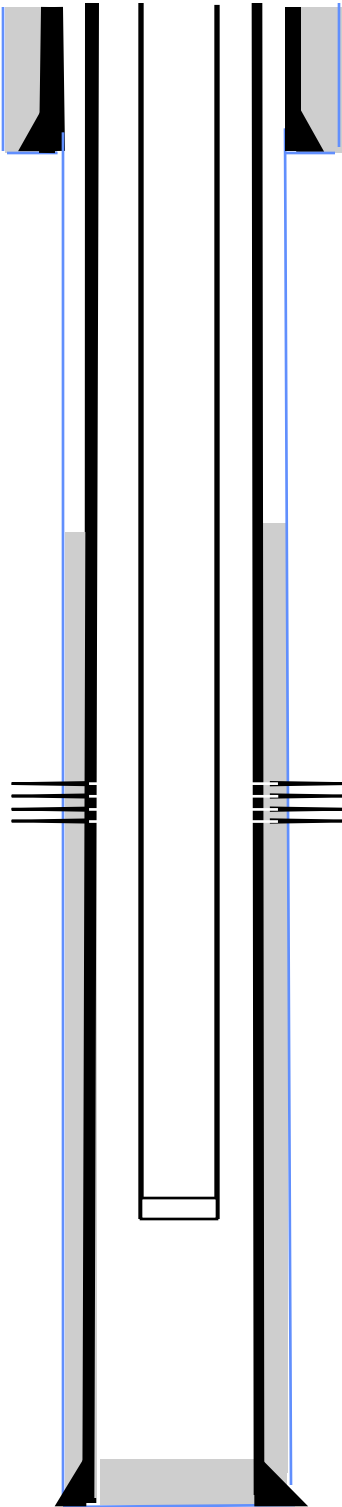

**Surface Casing and Cement**  
Casing size: 8 5/8", Hole Size: 12 1/4", landed @ 638', cemented with 285 sx  
TOC @ Surface

**Main Hole**  
7-7/8" to TD

**Production Casing and Cement**  
Casing size: 3-1/2", Hole size: 7 7/8", landed @ 7782', cemented with 230 sx  
TOC @ 6735'

Perf'd the Niobrara-Codell (commingled) from 7388'- 7637' (13 holes), w/104790 gal YF135-40HT w/ 300000 20/40 sand

7793' — Driller's TD