



99999999

THE FOLLOWING INFORMATION IS A PART OF THE LOG OF OIL AND GAS
WELL on the Durland Phillips Well No. 2, Located in Section 20,
Township 12 North, Range 55 West, Logan County, Colorado

SIZE OF HOLE DRILLED:

12 1/4 - Surface to 520'
7 7/8 - 520 to 6209'

CASING RECORD:

Surface - 376' of 8 5/8" OD, 24#
H-40, 8rd thd. smls. csg., set @ 385'

Production - 6168' of 5 1/2" o.d.
15.5#, J-55, Smls. Csg. set @ 6158'

CEMENT RECORD:

Surface - 250 sacks reg. cement with
2% CaCl₂

Production - 125 sxs regular cement

CEMENT-RETAINER & BRIDGING PLUG:

Set at 6096'
5 Gal. cement on top
Plug-Back T.D. inside Casing 6086'

CASING PERFORATIONS:

Attempted Squeeze - 6110' w/Welex
Four-Way Jet Producing perf.
6070-73' w/4 Jets/Ft. (Swing-Jets)

PACKER RECORD:


Halliburton HM (Open-ended) set @ 6026'

TUBING RECORD:

191 Jts - 6008.94' of 2 1/2 EUE Tubing
6.10' of 2 1/2 EUE pup Jt.
7.15' of (over all lgth pckr)
6022.19'
4.00' Below Zero
6026.19' Bottom of Packer

Note: Overall measurement of 191 Jts.- 6041.99' (O.A.)

OPEN FLOW CAPACITY:

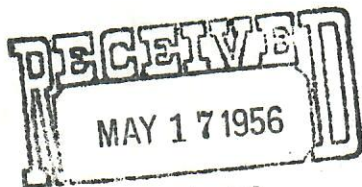

CONSERVATION COMMISSION



00822949

75-075-07365