




**OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO**

SUNDRY NOTICES AND REPORTS ON WELLS

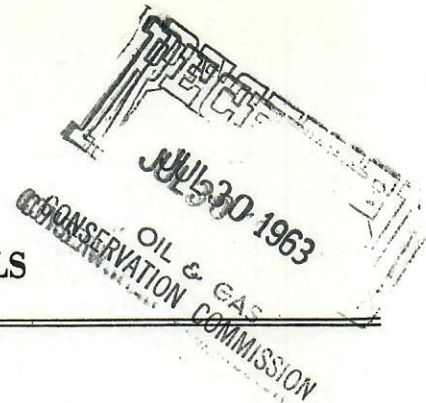

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recompleate or abandon a well or to change plans. Within thirty (30) days after recompleation, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

<input checked="" type="checkbox"/> Notice of Intention to Recomplete	<input checked="" type="checkbox"/>	Report of Remedial Work	<input type="checkbox"/>
Notice of Intention to Change Plans	<input type="checkbox"/>	Report of Recompleation	<input type="checkbox"/>
Notice of Intention to Abandon Well	<input type="checkbox"/>	Other	<input type="checkbox"/>

(Check appropriate space)

LEASE NAME CASEMENT WELL NO. A-3

FIELD Cliff Cause 66 WILDCAT Logan COUNTY

LOCATION C of SW, SE, Section 32 Township 12 N Range 54 W Meridian 6PM

660 feet from South Section Line and 1987 feet from East Section Line (Irregular)

N or S E or W

(DETAILS OF WORK)

This well has produced 125,790 barrels oil from the "D" sand and has completely watered out. Has been shut in since February 1963. The Core data of this well indicates the "J" sand to be productive with an expected recovery of 75 barrels oil to the acre foot so is proposed to cement squeeze the "D" sand perforations, drill out the CIBP at 5430, perforate "J" sand interval 5521-30 with 4 Jets per foot, swab test and treat with 500 gallons 15% HCL Acid if well stimulation is needed. Results of this recompleation will be submitted as soon as conclusive results are known.

*Order 66-1 'D' & 'J' sand
c 40' to 150' ft.*

DVR	
WRS	
HHM	
JAM	
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
FILE	

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

JUL 31 1963

Date

Director

Company British-American Oil Date July 29, 1963

Address Box 180; Denver 1, Colo Phone No. 222 9401

By [Signature] Title Dist Supt.

(Signature)