




99999999

OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

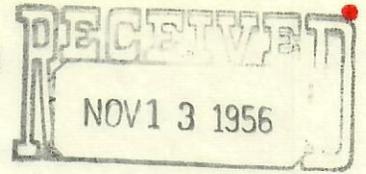

OIL & GAS CONSERVATION COMMISSION

PLUGGING RECORD

INSTRUCTIONS

07506213

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator The British-American Oil Producing Company Field Yenter Wildcat
Lease Name Koenig-Ashby Well No. 2 County Logan
Location SE SW Section 34 Township 9N Range 54W Meridian 6 P.M.
330 feet from South Section line and 1650 feet from West Section Line
N or S E or W

TOTAL DEPTH 5234 DATE OF PLUGGING 11-8-56
PBD 5231

DETAILS OF WORK

Dumped egg gravel from 5231 to 5158' and 10 sax cement from 5158 to 5076'. Shot casing off at 4023'. Recovered 122 joints 5-1/2", 15.5#, J-55 casing. Casing left in hole from 4023 to 5218 or 1175' of 5-1/2", 15.5#, J-55 casing. Filled with heavy mud from 5076 to 195', set rock bridge at 195' and spotted 10 sax cement to 170', heavy mud to 35', rock bridge and 18 sax cement to GL, erected marker in cement, filled cellar with soil and abandoned location.

Table with 2 columns: Name (AJJ, DVR, FJK, WRS, HHM, AH, JJD, FILE) and Status (checkboxes)

I/we hereby swear (or affirm) that the statements herein made are a full and correct



Approved: The British-American Oil Producing Company Date 11-8-56
Date NOV 13 1956 Address P. O. Box 180, Denver Phone No. AC2-9401
Director A. J. Gossin By Thomas W. Hopper Title District Superintendent

T

Abnd oil well