


CO  OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS

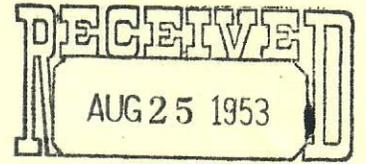

(Indicate nature of data by checking below)

OIL & GAS
CONSERVATION COMMISSION

- Notice of intention to drill _____
- Notice of intention to change plans _____
- Notice of date for test of water shut-off _____
- Report on result of test of water shut-off _____
- Notice of intention to re-drill or repair well _____
- Notice of intention to clean out well _____
- Statement of shooting _____
- Statement of perforating _____
- Notice to pull or otherwise alter casing _____
- Notice of intention to abandon well
- Report of work done on well since previous report

Following is a ~~(notice of intention to drill or to change plans)~~ August 7th - 19 53
(report of work done) (On land)
(patented) described as follows:

<u>Colorado</u>	<u>Logan</u>	<u>Wildcat</u>
State	County	Field
<u>1</u>	<u>Kilmer</u>	<u>26, NW 12 N. 55 W. 6th P. M.</u>
(Well No.)	(Lease)	(Sec. and 1/4 Sec.) (Twp.) (Range) (Meridian)

The well is located 330 ft. (N) of South line and 330 ft. ~~(N)~~ (W) of East line

The elevation above sea level is 4,794' ground ft.

Details of Plan of Work: (State names of and expected depths to objective sands; Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.

The well was plugged August 7, 1953 by setting a 35-sack cement plug from 5,950' to 5,840' with the hole full of mud. A 20-sack cement plug was set at 600' to 540'. A 5-sack cement plug was set in the top 20' of the surface pipe. 587' of 8 5/8 surface pipe was set with 250 sacks of cement and 2% jell. The total depth of the well was 6,055'.

Approved: AUG 25 1953

Deputy Director

SWEDLUND ROLAND WESTLUND DRILLING COMPANY
Company % Lee Swedlund
Address Sterling, Colorado
By Lee Swedlund
Title Operator

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.