




00792345

Sterling, Colorado
Phone LA 2-1206

VIRG'S TESTING CO.

Kimball, Nebraska
Phone 454

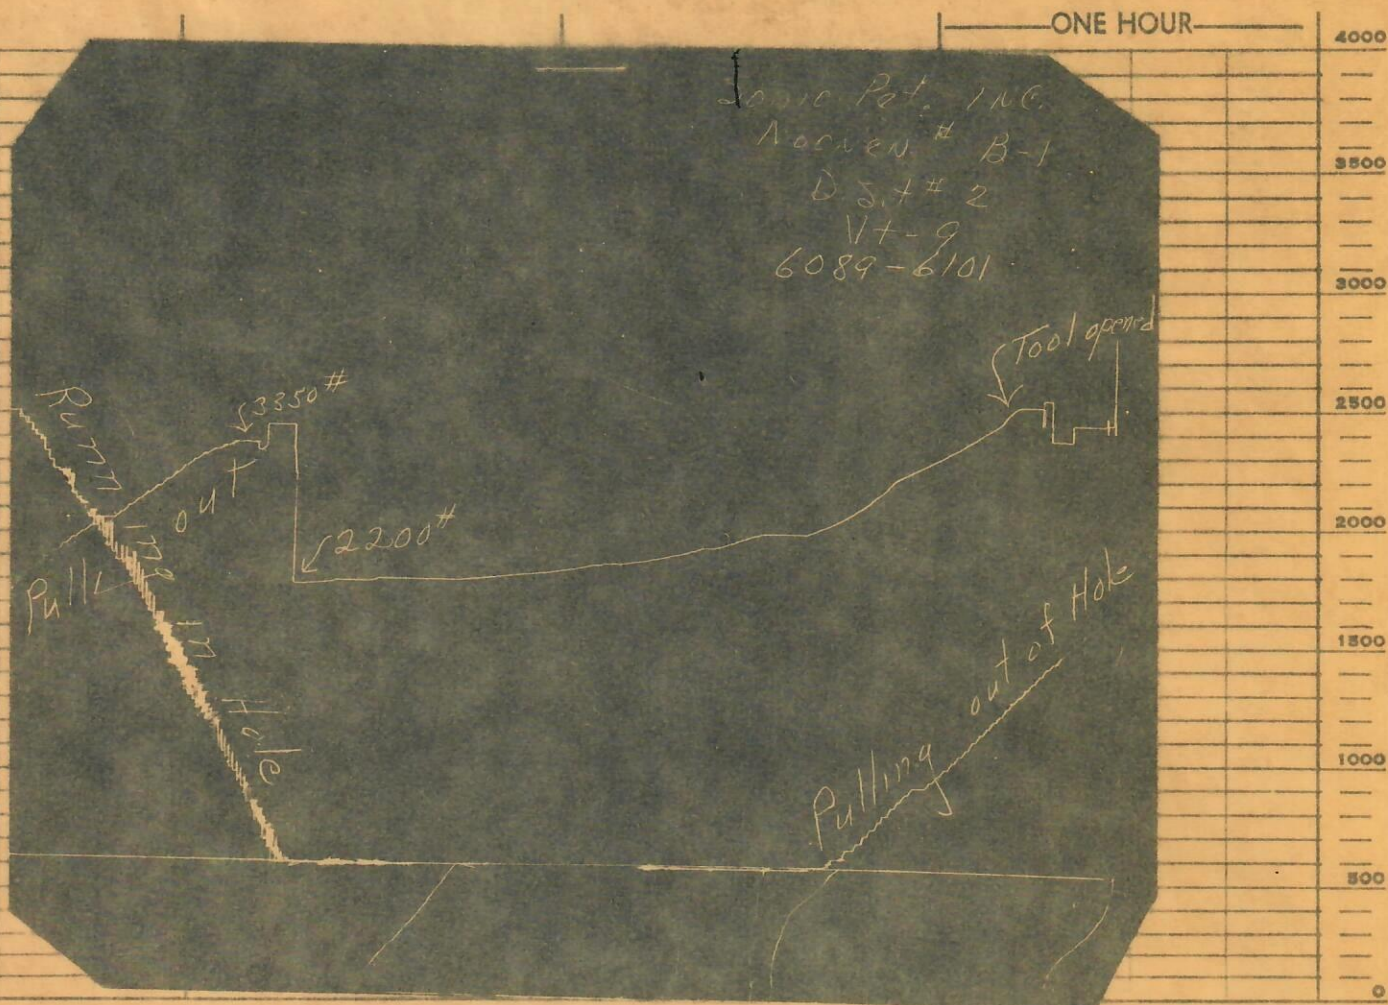

D. S. T. No. 2

Company operating well Sohio Petroleum Inc. Noonien B-1 This recorder blanked off below bottom packer and since pressure bled to only 2200 it was a successful straddle test.

Address to mail pressure charts

Contractor Rig No.

Well Name & No. County State Sec. Twn. Rng.

Total Depth D. P. Size Top Choke Bottom Choke

Date of Test Test Ticket No. Formation tested Tester

Interval being tested Length time tool open Mud Wt. Vis

Initial Flow Final Flow Hydrostatic Initial Shut-in Final Shut-in

Flowed gas? Oil? Water?

Was blow measured

Recovery in pipe


Total cost of test

Testers remarks

Sterling, Colorado
Phone LA 2-1206

VIRG'S TESTING CO.

Kimball, Nebraska
Phone 454

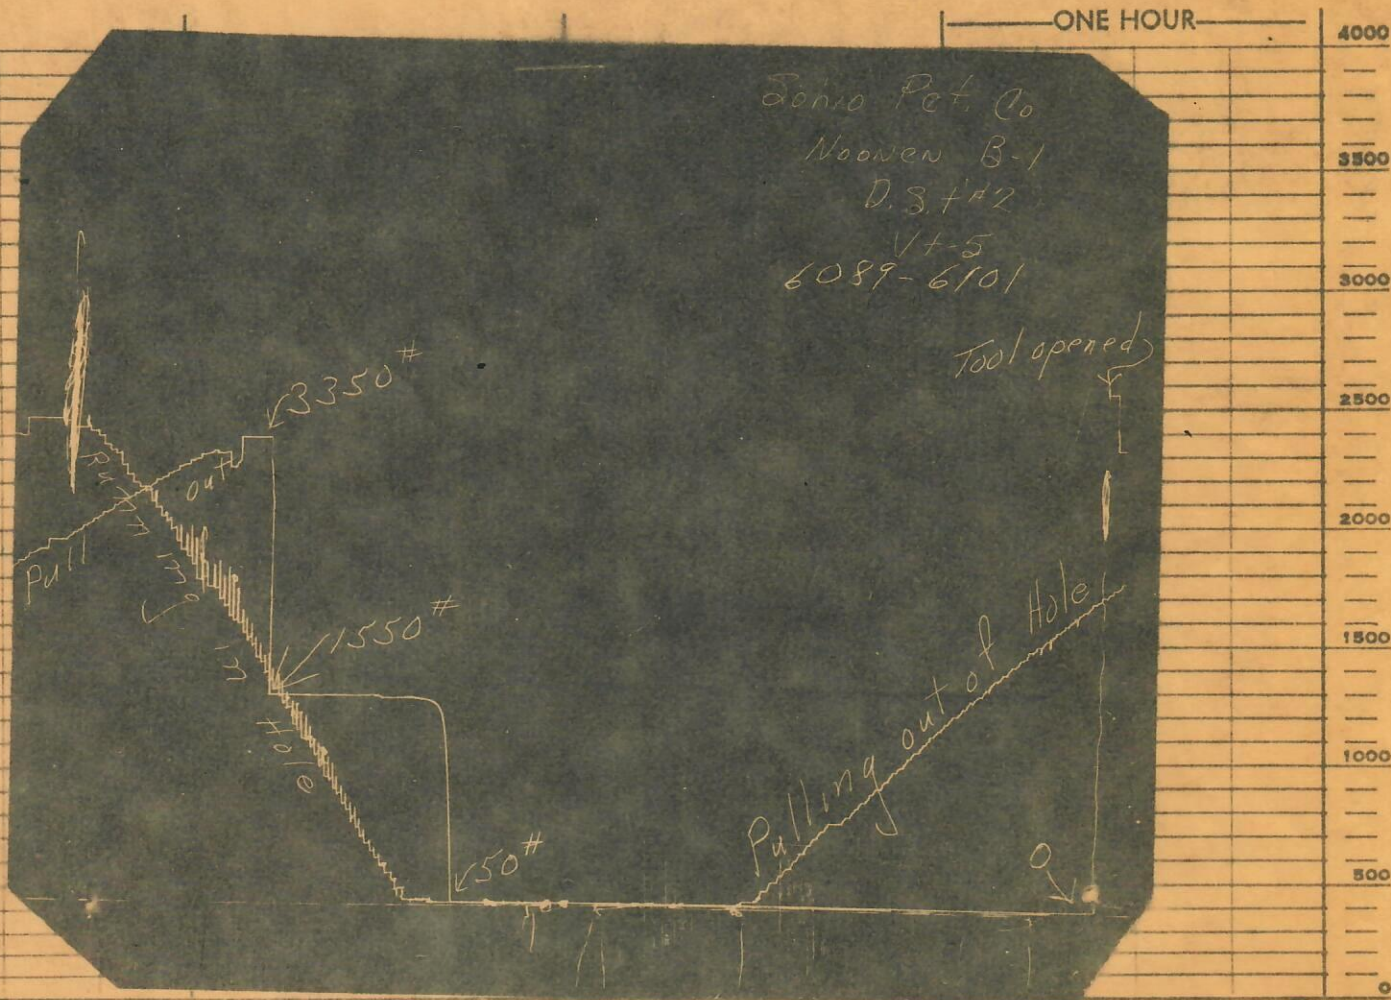

D. S. T. No. 2

Company operating well Sohio Petroleum Inc.

Address to mail pressure charts Box 359, Casper, Wyo.

Contractor New Drilg. Co. Rig No. 3

Well Name & No. Noonan B-1 County Adams State Colo. Sec. 13 Twn. 3S Rng. 59W

Total Depth 6123 D. P. Size 4 1/2 FH Top Choke 1" Bottom Choke 9/16

Date of Test 6-19-56 Test Ticket No. 907 Formation tested "J" Sand Tester John Struble

Interval being tested 6089-6101 Length time tool open 2 hrs. Mud Wt. 9.7 Vis. 100

Initial Flow 0 Final Flow 50 Hydrostatic 3350 Initial Shut-in none Final Shut-in 1350 @ 30 min.

Flowed gas? to surface in 45 min. Oil? no Water? no

Was blow measured @ 1 1/2 hrs. 65 MCF PD with very fine oil spray on 3/8 choke

Recovery in pipe @ 2 hrs. 180 MCF PD with no oil spray on 1/2 in. choke

190' oil and gas cut mud, 60' slightly oil and gas cut water.

Testers remarks Good blow.

Total cost of test \$176.00