


OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

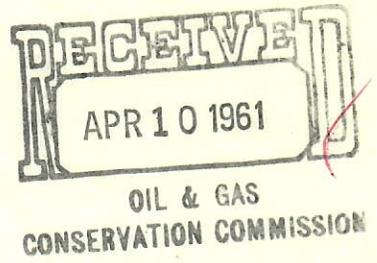

001-05018

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Champlin Oil & Refining Co. Field - - - Wildcat Yes
Lease Name Michael E. Noonan Well No. 1 County Adams
Location G-NW-NW Section 28 Township 3S Range 59W Meridian 6th
660 (Quarter Quarter) N Section line and 660 feet from W Section Line
N or S E or W

TOTAL DEPTH 61.75 DATE OF PLUGGING 4-5-61

DETAILS OF WORK

Plugged and abandoned well as follows:

- 1. Placed 15 sack plug from 145' to 95'.
2. Placed 10 sack plug from 34' to 1 1/2' below ground level.
3. Capped well by welding steel plate to top of surface casing.
4. Cleaned up location and closed pits.

NOTE: 10 lb/gal mud below and between all plugs.

8 5/8" @ 141'

4/21/61 checked loc. O.K. Hm

6064
4958
-1106

Table with 2 columns and 7 rows: AJJ, DVR, WRS, HHM, JAM, FJP, JJD, FILE. Checkmarks are present in the FJP and JJD rows.

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: [Signature] Date April 13, 1961
Company Champlin Oil & Ref. Co. Date 4/6/61
Address Box 451, Sidney, Nebr. Phone No. 4551
By [Signature] Title District Engineer

