

SWABBCO - Cement Division

11737 Locust Street
Fireston, CO 80504
+1 9702890506
ar@swabbco.com



INVOICE CT01770

DATE 11/28/2022 TERMS NET 90

DUE DATE 02/26/2023


COMPANY MAN:

JASSON GIBBS

LOCATION:

PACKARD 1 08763

DATE	DESCRIPTION	QTY
	4 Hour Cementer Charge	1
	Environmental fee	1
	High Pressure Iron with Restraints	1
	Cement Pump and Pneumatic Bulker Milage	400
	Class G Neat Cement	1,000
	NIOESQUEEZE CEMENT	150
	Class G cement with Thixotropic additive pack	90
	Additional Cement Pump Hours (Non Discounted)..	13
	Additional Pneumatic Hours (Non Discounted)	13
	SAPP	2
	Sugar	100
	Bulk Material Mixing Service Charge	1,240

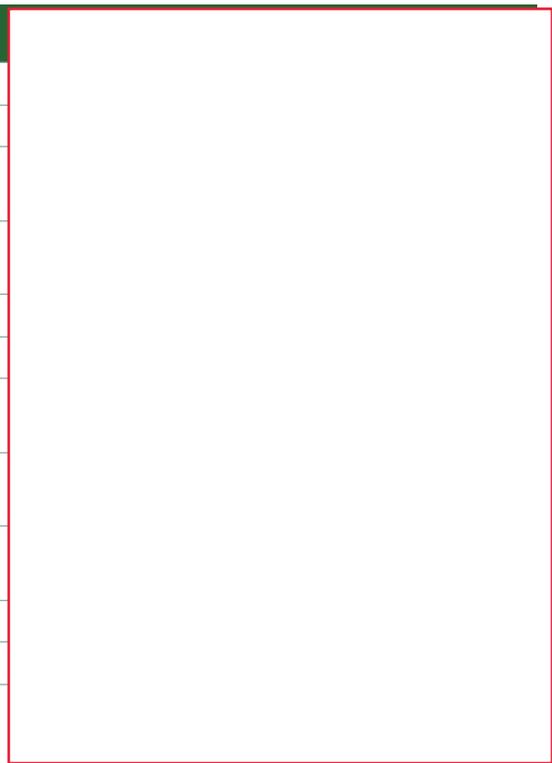

CP10

STATUS 5 1/2 DRILL PIPE, INSIDE 11" OPEN HOLE,
DRIVE TO LOCATION, SPOT IN EQUIPMENT, MAKEUP LINES.
1ST BALANCE PLUG 6700'-6550'

Pressure test lines, pumped 30 bbls lead, mix and pump 75 sks nioesqueeze cement, 1.17 cu.ft/sack yield 15.8# displace with 10.5 bbls h2o and 81 bbls drill mud, rig down lines

2ND. BALNCE PLUG 5997'-5847'

rig up lines, pumped 30 bbls lead, mix and pump 75 sks nioesqueeze cement, 1.17 cu.ft/ sack yield, displace withb 10.5 bbls water and 71 bbls drill mud, rig down lines.

3RD. BALANCE PLUG 2200'-2000'

Rig up lines, pumped 30 bbls lead, mix and pump 90 sacks class G cement with thixotropic additives 1.52# 1.32 cu.ft/sack yield, displace with 5.5 bbls H2O and 22 bbls drill mud, rig down lines,

SURFACES PLUG 800'-0

Rig up lines, pumped 30 bbls lead, mix and pump 910 sacks class g neat cement good cement to surfaces, stand by waiting on rig lay down tubing, pumped 90 sacks top off well, rig down lines, wash pump and lines, drive equipment back to yard

TOTAL DUE

PACKARD 1 (08763)
AFE: P1657C
COST CODE: 8306.240
ROUTING: TREVIN
JASON GIBBS
DATE SIGNED: 11-29-22



SWABBCO - Cement Division

11737 Locust Street
Fireston, CO 80504
+1 9702890506
ar@swabbco.com



BILL TO

Civitas
650 Southgate Drive
Windsor, Co 80550 USA

INVOICE CT01779

DATE 12/07/2022 TERMS NET 90

DUE DATE 03/07/2023

COMPANY MAN:

JAISON GIBBS

LOCATION:


PACKARD #1 (08763)

DATE	DESCRIPTION	QTY
	4 Hour Cementer Charge	0.50
	Cement Pump and Pneumatic Bulkier Milage	50
	Fresh Water bobtail	2
	Fresh Water (bbl)	20
	Class G Neat Cement	30

CP-10

TOP OF JOB

drive to location, arrive on location, spot in equipment, rig pump and lines, mix and pump 30 sks class G neat cement 15.8# 1.15 CU.FT/SACK YIELD, 6 bbls slurry to top of well, rig down lines, wash pump and lines...

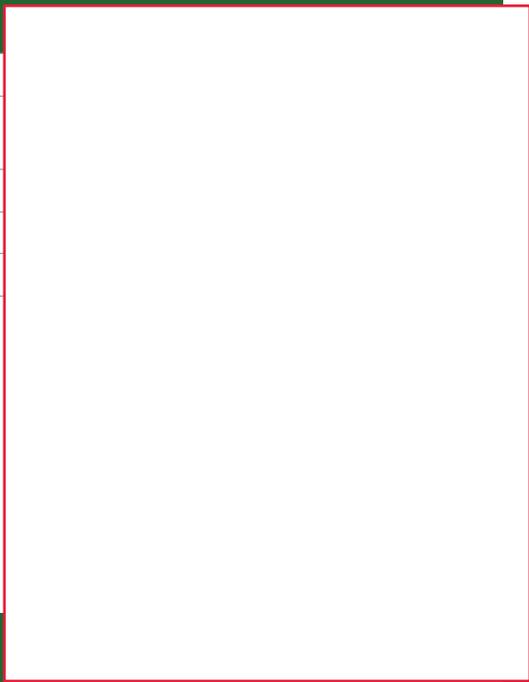

TOTAL DUE

PACKARD 1 (08763)
AFE: P1657C
COST CODE: 8306.240
ROUTING: TREVIN
JASON GIBBS
DATE SIGNED: 12-08-22