


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO



NOTICE OF INTENTION TO DRILL

OIL & GAS
CONSERVATION COMMISSION

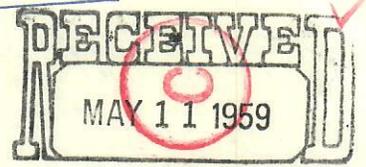


INSTRUCTIONS:

A notice of intention to drill a well shall be filed in duplicate on all Federal and Patented lands, and in triplicate on all State lands. Do not begin operations until approved copy has been received. It is mandatory that the proposed location comply with all rules and regulations of the Commission. Locate well on section grid in proper location, and indicate extent of lease. Unless operations are commenced within 180 days after the date of approval hereof, this approval to drill will become null and void.

Name of Operator Cabeen Exploration Corporation Phone No. AMherst 6-1635
Address 945 Petroleum Club Bldg. City Denver State Colorado

How is liability secured: Well Bond (Attached) ; Blanket Bond ; Waiver
(Check one)

Lease Name Blevins A
Well No. 8
Field Name Canadian River Wildcat
County Jackson

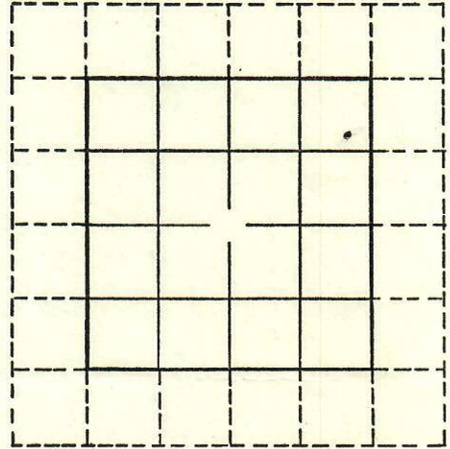

Location NE¼ NE¼ Section 10 Township 9N Range 78W Meridian 6th PM
(quarter quarter)
850 feet from N Section line and 410 feet from E Section Line
N or S E or W

The well is located on: Patented land State land Federal land

The well is located within a spaced area: Yes No

Distance from proposed location to nearest property or lease line 470 feet.
Distance from proposed location to nearest drilling unit line not spaced feet.

Objectives: Dakota Formation Depth 1950 Estimate; Lakota Formation Depth 2025 Estimate

Agent	<input checked="" type="checkbox"/>
Bond	<input checked="" type="checkbox"/>
Spot	
600 ft.	<u>Order</u>
1200 ft.	<u>96-2</u>
Wells	
Oil	
Gas	
Status	

Proposed length of surface casing 300 feet.

REMARKS: Drill 12¼" hole to approximately 300'. Cement 8-5/8" csg. to surface. Drill 7-7/8" hole to approximately 2150' using conv. mud. Cement 5½" 14# csg. thru pay. Run 2-3/8" tubing, displace mud with oil and perforate pay with expendable jets thru tubing.

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Date MAY 11 1959

A. J. [Signature]
Director

Company Cabeen Exploration Corp. Date May 11, 1959

Address 945 Petroleum Club Bldg. Phone No. AM 6-1635

By P. J. Westrup Title Div. Engineer
P. J. Westrup Signature