



00572639


API 061-06036

VERBAL REQUEST

NOTICE OF INTENT TO DRILL \_\_\_\_\_

NOTICE OF INTENT TO ABANDON ☒

OTHER \_\_\_\_\_

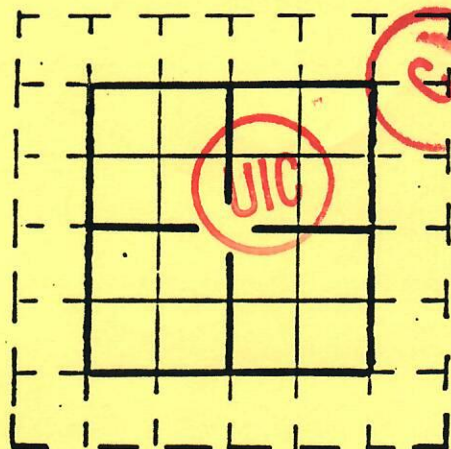

COMPANY

Bark O &amp; G

ADDRESS \_\_\_\_\_

BY

Dave Rebol / H &amp; R

PHONE NO. \_\_\_\_\_

EXT. \_\_\_\_\_

WELL NO.

2-I

LEASE

NWBU

COUNTY

Kiowa

FIELD

Brandon

DRLG UNIT \_\_\_\_\_

LOCATION

NENE

SEC

5

TWP

19S

RNGE

45W

MERIDIAN \_\_\_\_\_

\_\_\_\_\_ ft. from N or S Sec. Line, and \_\_\_\_\_ ft. from E or W Sec. Line

ESTIMATED DATE OF WORK

7/20

ESTIMATED TIME \_\_\_\_\_

DETAILS OF PLAN OF WORK:

T.D.

4778 pb

FORMATION

Perfs 4550-4630

SURFACE CASING

8 5/8" @ 204

5 1/2" prod csq.

St. Louis/Spergen

Est TOC @ 4200'

Dakota 700

Set CIBP above perfs @ 4500 dump 3 sacks

base Cheyenne 100

Attempt to cut and pull csq; Want plugs across

Dakota/Cheyenne 40 sacks @ 1000, 40 sacks @ 700.

35 sacks 1/2 in / 1/2 surface

5" surface, Cut of 4' BGL

BONDING STATUS:

PLUGGING \_\_\_\_\_

SURFACE \_\_\_\_\_

OTHER \_\_\_\_\_

Is surface owner also mineral owner? \_\_\_\_\_

ACREAGE LEASED SURROUNDING DRILLSITE \_\_\_\_\_

APPROVED BY:

J. Howell

DATE

7/18/90