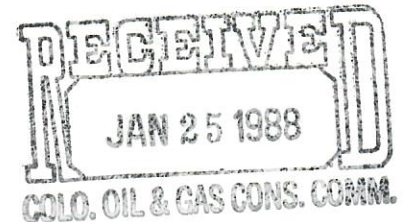




00219539

H&R Well Services, Inc.
0902 Rd 4
Wiggins, Colorado
80654



January 18, 1988



Mr. Paul Gagnon
Kaurman & Wineberger
Denver, Colorado

Re: Thayer #2-30
NESW Sec 30-6N-67W

Dear Paul,

We performed the following work on your lease. This letter is also being forwarded to the Colorado Oil and Gas Commission at their request. It is needed in addition to the Form 4 when a well is plugged and abandoned.

Set CIBP at 6200' and dumped 4 sacks of cement.
Cut pipe at the freepoint of 6061', and pulled casing to 2310'.
Pumped 25 sacks of cement to 2310'.
Lay casing down to the base of surface at 532', and spot 10 sacks.
Spotted 10 sacks at surface.
Cut the wellhead off 4' below ground level, and welded a plate.
Backfilled the hole.

Sincerely,

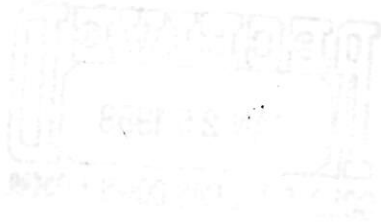

Dave Rebol
H&R Well Services, Inc.

Accept AS Form 4
B

cc: Colorado Oil and Gas Conservation Commission

Well File





Mr. Paul Mason
Bureau of Reclamation
Denver, Colorado

We performed the following work on your lease. This letter is also being forwarded to the Colorado Oil and Gas Commission at their request. It is needed in addition to the form when a well is plugged and abandoned.

5/15/80
Jim I have talked to
Dean Cummings with
Sunset twice about
Walter Properties getting
a bond and submitting
Form 10's. He assures me
it will be taken care of.
Please watch for the bond
Bill

cc: Colorado Oil and Gas Conservation Commission