



05 017 7307

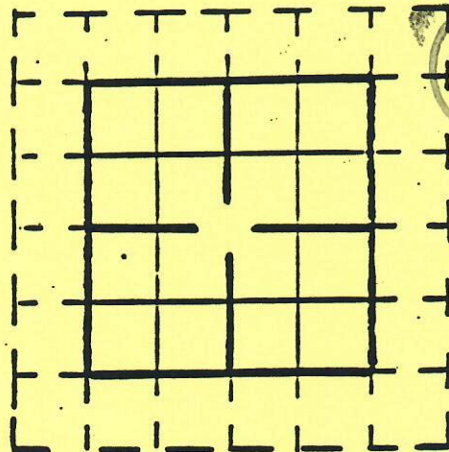
92-400

VERBAL REQUEST

NOTICE OF INTENT TO DRILL _____

NOTICE OF INTENT TO ABANDON X

OTHER _____

COMPANY MULL ADDRESS _____BY RALPH STANSBURY PHONE NO. _____ EXT. _____WELL NO. 1 LEASE STATE WINSHIPCOUNTY CHEYENNE FIELD WC DRLG UNIT _____LOCATION NW SE SEC 16 TWP 16S RNGE 51W MERIDIAN _____2205 ft. from N or S Sec. Line, and 2130 ft. from E or W Sec. LineESTIMATED DATE OF WORK 5/23 ESTIMATED TIME _____DETAILS OF PLAN OF WORK: T.D. 5845 FORMATION _____SURFACE CASING 8 5/8 TO 34" DST 1 NARWATON 4804-40① 40 SK CMT 5700' UP 465' MUD + WATER② 40 SK 4800 180' GAS IN PIPE③ 40 SK 2000 DST 2 ST LOUIS 5675-5726④ 40 SK 1700 100' MUD + WATER⑤ 40 SK 1/2 IN 1/2 OUT 8 5/8 535' GAS IN PIPE⑥ 10 SK TOP 8 5/8, CUT 4 FT BGL, WELD PLATE 5 RH 5 MHBONDING STATUS: PLUGGING B SURFACE _____ OTHER _____Is surface owner also mineral owner? N

ACREAGE LEASED SURROUNDING DRILLSITE _____

APPROVED BY: [Signature] DATE 5/23/92 0130

DAKOTA 1465-1605

CHEYENNE 1696-1806

PERM TOP 2007

SC 2933