


COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS



OIL & GAS
CONSERVATION COMMISSION


(Indicate nature of data by checking below)



00039135

Locate Well Correctly

- Notice of intention to drill (attach plat) _____
- Notice of intention to change plans _____
- Notice of date for test of water shut-off _____
- Report on result of test of water shut-off _____
- Notice of intention to re-drill or repair well _____
- Notice of intention to clean out well _____
- Statement of shooting _____
- Statement of perforating _____
- Notice to pull or otherwise alter casing _____
- Notice of intention to abandon well _____
- Report of work done on well since previous report _____

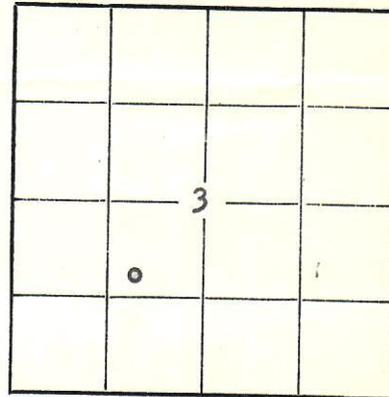

Notice to do work
Report of work done

Land: Fee and Patented
State

Lease No. 67334

Colorado
State

Rio Blanco
County

Rangely
Field

3 Associated "B" NE-SW 3 1N 102-W 6 th.
(Well No.) (Lease) (1/4 Sec.) (Sec.) (Twp.) (Range) (Meridian)

The Well is located 1645 Ft. (N) of Section Line and 1460 Ft. (E) of
Section Line. (S) (XX)

The elevation above sea level is 5195 Ft.

Details of Plan of Work: (State names of and expected depths to objective sands. Show sizes, weights, and length of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

Well has been shot with SNG and had one rotary cleanout and one cable tool clean-out. Latest production was 0.69 BOPD. It is our intention to abandon the well in the following manner:

1. Set a 30' cement plug at top of Weber from 5853-5883.
2. Determine free point in 7" casing (estimated 3100'), rip and raise 7".
3. Mud hole to casing stub and set 30' cement plug on stub.
4. Pull 7" casing and mud hole to surface.
5. Set 5 sacks cement plug with 4" concrete marker extending 6' above the ground.
6. Grade location and abandon well.

AJJ	
DVR	
FJK	
OPS	
HMM	
AH	
JJD	<input checked="" type="checkbox"/>
FILE	

Approved: NOV 24 1954

Date November 23, 1954

A. J. Yessier
Deputy Director

Company Stanolind Oil and Gas Company

Address Rangely, Colorado

By G. W. Lancaster

Title Field Superintendent

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.