




00062409

(SUBMIT IN TRIPLICATE)



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Denver
Lease No. Patented
Unit Powell Park
14-08-001-3465

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	X
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

February 12, 19 60


Mannel

Well No. 4 is located 1730 ft. from {N} line and 660 ft. from {E} line of sec. 21
Tract 41, Lot 1

S/C NE/4 SE/4 Sec. 21 1N 95W 6 PM
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Powell Park Unit Rio Blanco Colorado
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6081.8 ft.

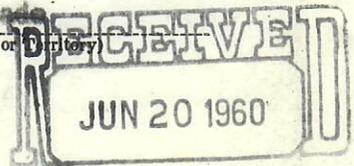

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

- 1-15-60: TD 100. Drl'd to TD w/dry hole digger. Ran 3 jts 13-3/8" OD 48# H-40 csg, set at 91' grd meas., cem w/130 sx reg cem w/2% CaCl, pumped plug to 62', cem circ.
- 1-25-60: Spudded 12-1/4" hole w/rotary tools at 7:30 PM.
- 1-26-60: TD 485. Ran 15 jts 8-5/8" 24# J-55 csg, set at 474' RKB, cem w/270 sx reg cem w/2% CaCl, cem circ.
- 2-10-60: TD 5001. Ran Schlumberger I-ES and ML; Tops: Charlie 4003, Mannel 4392-97, Ohio Conglomerate 4922.

Approved 6-10-60

J. J. Zimmerman
Asst. District Engineer

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Phillips Petroleum-Trident Oil Co., et al

Address P. O. Box 2331
Gasper, Wyoming

By *W. E. Goff*
Title Dist. Superintendent

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	✓
FILE	✓