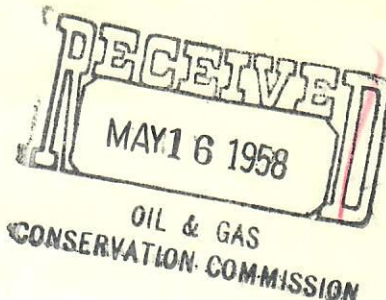


OIL AND GAS CONSERVATION COMMISSION  
OF THE STATE OF COLORADO

## PLUGGING RECORD

## INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator B. W. Vinson Field Unmanned Wildcat X  
B. W. Vinson, et al  
 Lease Name Colorado State Lease #4378-17 Well No. 1 County Morgan  
 Location C SE SW Section 16 Township 2 North Range 55 West Meridian 6  
 (Quarter Quarter)  
660 feet from South Section line and 1941 feet from West Section Line  
 N or S E or W

TOTAL DEPTH 5026DATE OF PLUGGING April 29, 1958

## DETAILS OF WORK

2 sacks cement "J" sandstone, 6 $\frac{1}{4}$ " core hole from 5011-5026 feet.

20 sacks cement "D" sandstone, 7-7/8" bore hole from 4933-5000 feet.

5 sacks cement Base of surface pipe, 8-5/8" surface pipe from 93-106 feet.

5 sacks cement Top of surface pipe 8-5/8" surface pipe from 11-24 feet.

Heavy drilling mud spotted in bore hole between each cement plug -- 4" surface marker set in top of surface pipe with location, operator and elevation welded on steel pipe.

AJJ	
DVR	
WRS	<input checked="" type="checkbox"/>
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date MAY 16 1958

Director

Company Exeter Drilling Company Date May 14, 1958Address 208 Midland Savings Bldg. Phone No. AL 5-3226By Mayne T. Bidde Title Vice President  
(Signature)