


# OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

## NOTICE OF INTENTION TO DRILL



OIL & GAS  
CONSERVATION COMMISSION

### INSTRUCTIONS:




A notice of intention to drill a well shall be filed in duplicate on all Federal and Patented lands, and in triplicate on all State lands. Do not begin operations until approved copy has been received. It is mandatory that the proposed location comply with all rules and regulations of the Commission. Locate well on section grid in proper location, and indicate extent of lease. Unless operations are commenced within 180 days after the date of approval hereof, this approval to drill will become null and void.

Name of Operator The Texas Company Phone No. 2-5353  
Address P. O. Box 1346, City Casper State Wyoming

How is liability secured: Well Bond (Attached) ☐; Blanket Bond ☒; Waiver ☐  
(Check one)

Lease Name Forbes-Marick  
Well No. 2  
Field Name Pinneo cause 70 Wildcat ☐  
County Morgan

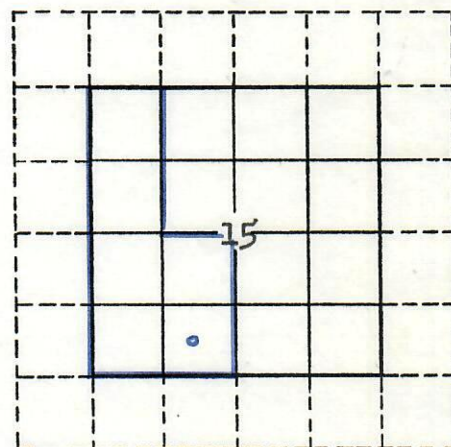

Location C SE SW Section 15 Township 2N Range 55W Meridian 6th PM  
(quarter quarter)  
660 feet from South Section line and 1942 feet from West Section Line  
N or S E or W

The well is located on: Patented land ☒ State land ☐ Federal land ☐

The well is located within a spaced area: Yes ☒ No ☐

Distance from proposed location to nearest property or lease line 660 feet.  
Distance from proposed location to nearest drilling unit line 660 feet.

Objectives: Dakota "D" Depth 4935' (Top); Dakota "J" Depth 5018' (Top)  
Formation Estimate Formation Estimate

Proposed length of surface casing 200 feet.

### REMARKS:

We propose to drill a well on the above described location using rotary tools. 8-5/8" OD 24# casing will be set as surface casing and cemented to surface by an approved method. A 7-7/8" hole will be drilled through the Dakota formation and an electric log run to total depth.

If any formation is found to be commercially productive, 5-1/2" OD casing will be run and cemented by an approved method. The casing will then be perforated and the well prepared for production.

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Date SEP 6 1956

A. J. Garrison  
Director

Company The Texas Company Date 8-30-56

Address Box 1346, Casper, Wyo. Phone No. 2-5353

By Walter Paul Title District Superintendent  
Signature

AJJ	
DVR	
FJK	
WRS	
HHM	
AH	
JJD	<input checked="" type="checkbox"/>
FILE	