



99999999



121-06876

Budget Bureau 42-R358.3. Approval expires 12-31-55.

(SUBMIT IN TRIPLICATE)


Land Office

Lease No.

Unit

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

COLORADO OIL AND GAS CONSERVATION COMMISSION

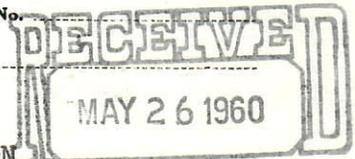

OIL & GAS CONSERVATION COMMISSION

SUNDRY NOTICES AND REPORTS ON WELLS

Table with 2 columns: Notice of Intention to... and Subsequent Report of... with checkboxes.

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 23, 1960

Wm. A. Gebauer "A"

Well No. 1 is located 660 ft. from N S line and 1980 ft. from E W line of sec. 33

NW NE, Section 33 2N 54W 6th (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Ruby Washington Colorado (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 4554 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

7" surface casing was set at 253' and cemented to surface with 200 sacks of regular, 2% c.c. It is proposed to fill hole with mud from total depth, 4922' to 253'; 15 sacks of cement, 253' to 173'; mud, 173' to 53'; 10 sacks of cement, 53' to surface.

Table with 2 columns: Name and checkmark. Rows: AJJ, DVR, WRS, HHM, JAM, FJP, JJD, FILE.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Kingwood Oil Company First National Building Address Oklahoma City, Oklahoma Phone CE 6-3771



00599956

By Ben Sprain

Title Chief Clerk