

Donnelly Casing Pulling Co.


Phone 522-1410



00085667

Bob Donnelly

P.O. Box 791
Sterling, Colorado 80751

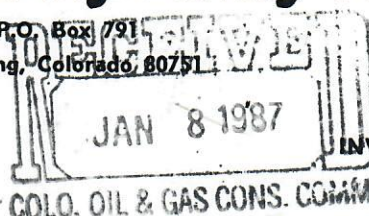

INVOICE DATE 12-30-86

SOLD
TO

Skaer Enterprises, Inc.
P. O. Box 22418
Denver, Co. 80222

WELL Federal A-2

INVOICE NO. 87-130

Pulled rods & Tubing		\$ 800.00
3050' 5½" Casing @	\$ 1.50 per foot	4575.00
Day Work, 17 hours @	\$ 50.00 per hour	850.00
Cement, 37 sacks @ (extra plugs)	\$ 7.00 each + tax	266.77
Pump Job, 1 @	\$550.00 per job	550.00
Forklift, 3 hours @	\$ 40.00 per hour	120.00
		<u>\$7161.77</u>

DATE	DAY WORK	REMARKS
12-11-86	1 hour	Moved unit. Raised pole. Unseated pump.
12-12-86	1 hour	Pulled rods, 204. Unseated anchor.
12-15-86	1 hour	Pulled tubing. Ran sand from 5139' to 5100'. Dug cellar, Water truck, 3 hours.
12-16-86	1 hour	Dumped 12 sacks cement (7 extra) on sand. Loaded hole. Set in floor. Pulled off nipple. Tore out floor. Welded on collar. Water truck, 3 hours.
12-17-86	1 hour	Set in floor. Worked pipe to 31". Ran a shot to 3040'. Came loose. Pulled 50 joints.
12-18-86	4 hours	Pulled pipe, 74 total joints. Ran 110 joints tubing to 3050'.
12-19-86	8 hours	Pumped 30 sacks cement. Pulled 94 joints tubing to 180'. Pumped 25 sacks cement. Pulled tubing. Tore out floor. Tallied pipe. Tagged plug, 98'. Filled with mud to 35'. Set 10 sacks cement to 5' below ground level. Welded on cap and marker. Water truck, 4 hours. Loaded tubing and casing. Forklift, 3 hours

WELL COMPLETE

THANK YOU