


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO



PLUGGING RECORD

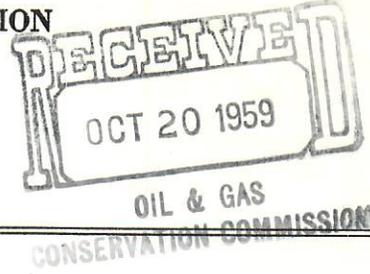

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Plains Exploration Company Field Ruby Wildcat
 Lease Name Donald M. Mitchell et al Lses L-2593 Well No. # 3 County Washington
 Location C NW NW Section 28 Township 2 N Range 54 W Meridian 6th P.M.
 (Quarter Quarter)
661 feet from N Section line and 664 feet from W Section Line
 N or S E or W

TOTAL DEPTH 4937' DATE OF PLUGGING Oct. 15, 1959

Subal
10/15/59

DETAILS OF WORK

The well was plugged 10.15.59 by filling it with heavy mud from the total depth to the bottom of the surface pipe (4937 to 100). A 10 sack cement plug was set in the bottom 30 feet of the surface pipe 100 to 30, then the casing was filled with heavy mud to within 20 feet of the top. A 7 sack cement plug was set in the top 20 feet of the surface pipe (30 to 10).

All measurements are taken from the kelly bushing which was approximately 7 feet above the ground.

AJJ	
DVR	
WRS	
HMM	
JAM	✓
FIP	
JLD	✓
TRF	

Plugging checked by Jim on 11/18/59

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: _____ Date OCT 20 1959
 Company Plains Exploration Company Date 10.19.59
1135 Petroleum Club Bldg.
 Address Denver 2, Colorado. Phone No. CH 4-7431
 By Robert E. Johnson Title Expl. Mgr
 Director _____ Robert E. Johnson (Signature)