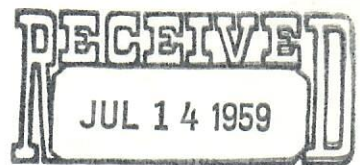


121-06932

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

99999999

OIL & GAS
CONSERVATION COMMISSION

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Seneca Oil Company Field Stoney Point Wilcat
Lease Name Windolph Well No. 2 County Washington
Location SW 1/4 NW 1/4 SE 1/4 Section 20 Township 2 N Range 54 W Meridian 6th PM
(Quarter Quarter)
1650 feet from S Section line and 2310 feet from W Section Line
Nor S E or W

TOTAL DEPTH 5035DATE OF PLUGGING 6-16-59

DETAILS OF WORK

Plugged with cement across face of perforations.

Set Halliburton Limit Plug @ 4660 feet.

Dumped 3 sacks of cement on top of plug.

Pulled 5 1/2" casing from 3625 feet.

Plugged bottom of surface pipe with 5 sacks of cement and top with 5 sacks.

Welded cap and marker on top of surface pipe.

PTA Oil Well

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	



00599769

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date JUL 14 1959

Director

Company David T. SheppardDate 7-10-59Address 2555 Locust St.Phone No. DE3-5136

By

(Signature)

Title