


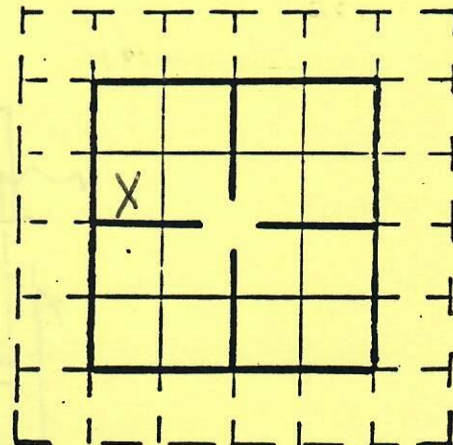

00204742

VERBAL REQUEST

NOTICE OF INTENT TO DRILL _____

NOTICE OF INTENT TO ABANDON ☒

OTHER _____


COMPANY SUNSET HILL ADDRESS _____BY MARK POWELL PHONE NO. 678-7030 EXT. _____WELL NO. 2 LEASE DOLL ESTATECOUNTY WELD FIELD GRAIL DRLG UNIT _____LOCATION SW NW SEC 14 TWP 7N RNGE 58W MERIDIAN 61980 ft. from N or S Sec. Line, and 660 ft. from E or W Sec. LineESTIMATED DATE OF WORK 3/31/88 ESTIMATED TIME _____DETAILS OF PLAN OF WORK: T.D. (PB) 6387 FORMATION D SAND Perfs 6319-34SURFACE CASING 8 5/8" @ 221', 4 1/2" @ 6646Letter indicates J-SAND + NBRL also PERFED.USE 10 SKS, CUT 6387 TO 6269' INSIDE 4 1/2" AND 50' ABOVE D PERFSDETERMINE FREEPOINT, ~4400', CUT 4 1/2", place 20 SKS 1/2-IN 1/2OUT OF STUB20 SKS 1/2-IN 1/2OUT AT BASE OF 8 5/8"10 SKS SURFACECUT OFF 4' B.G.L. + WELD ON PLATE - RESTORE SURFACE SEND IN CV
+ FM 4

BONDING STATUS: PLUGGING _____ SURFACE _____ OTHER _____

Is surface owner also mineral owner? _____

ACREAGE LEASED SURROUNDING DRILLSITE _____

APPROVED BY: SSK DATE 3/8/88

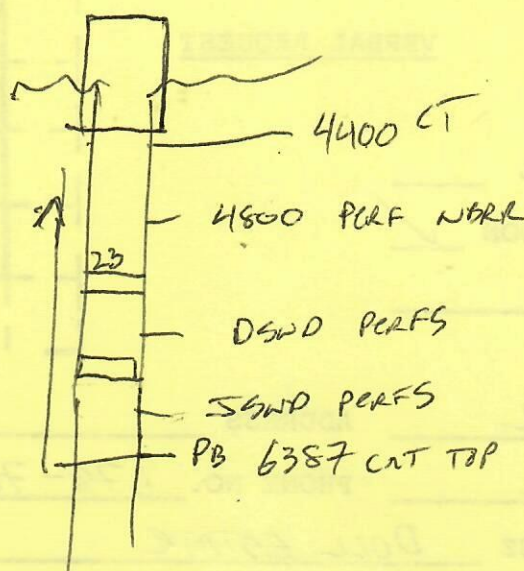

4 1/2" CGY

~~4~~
 11.2 ft / 43' (1.1 ft / 43')

12.1 SK

6319
 50
 6269
 6387
 12' (118')

50' DSWD

20 SKS