


# Soil Map—Weld County, Colorado, Southern Part

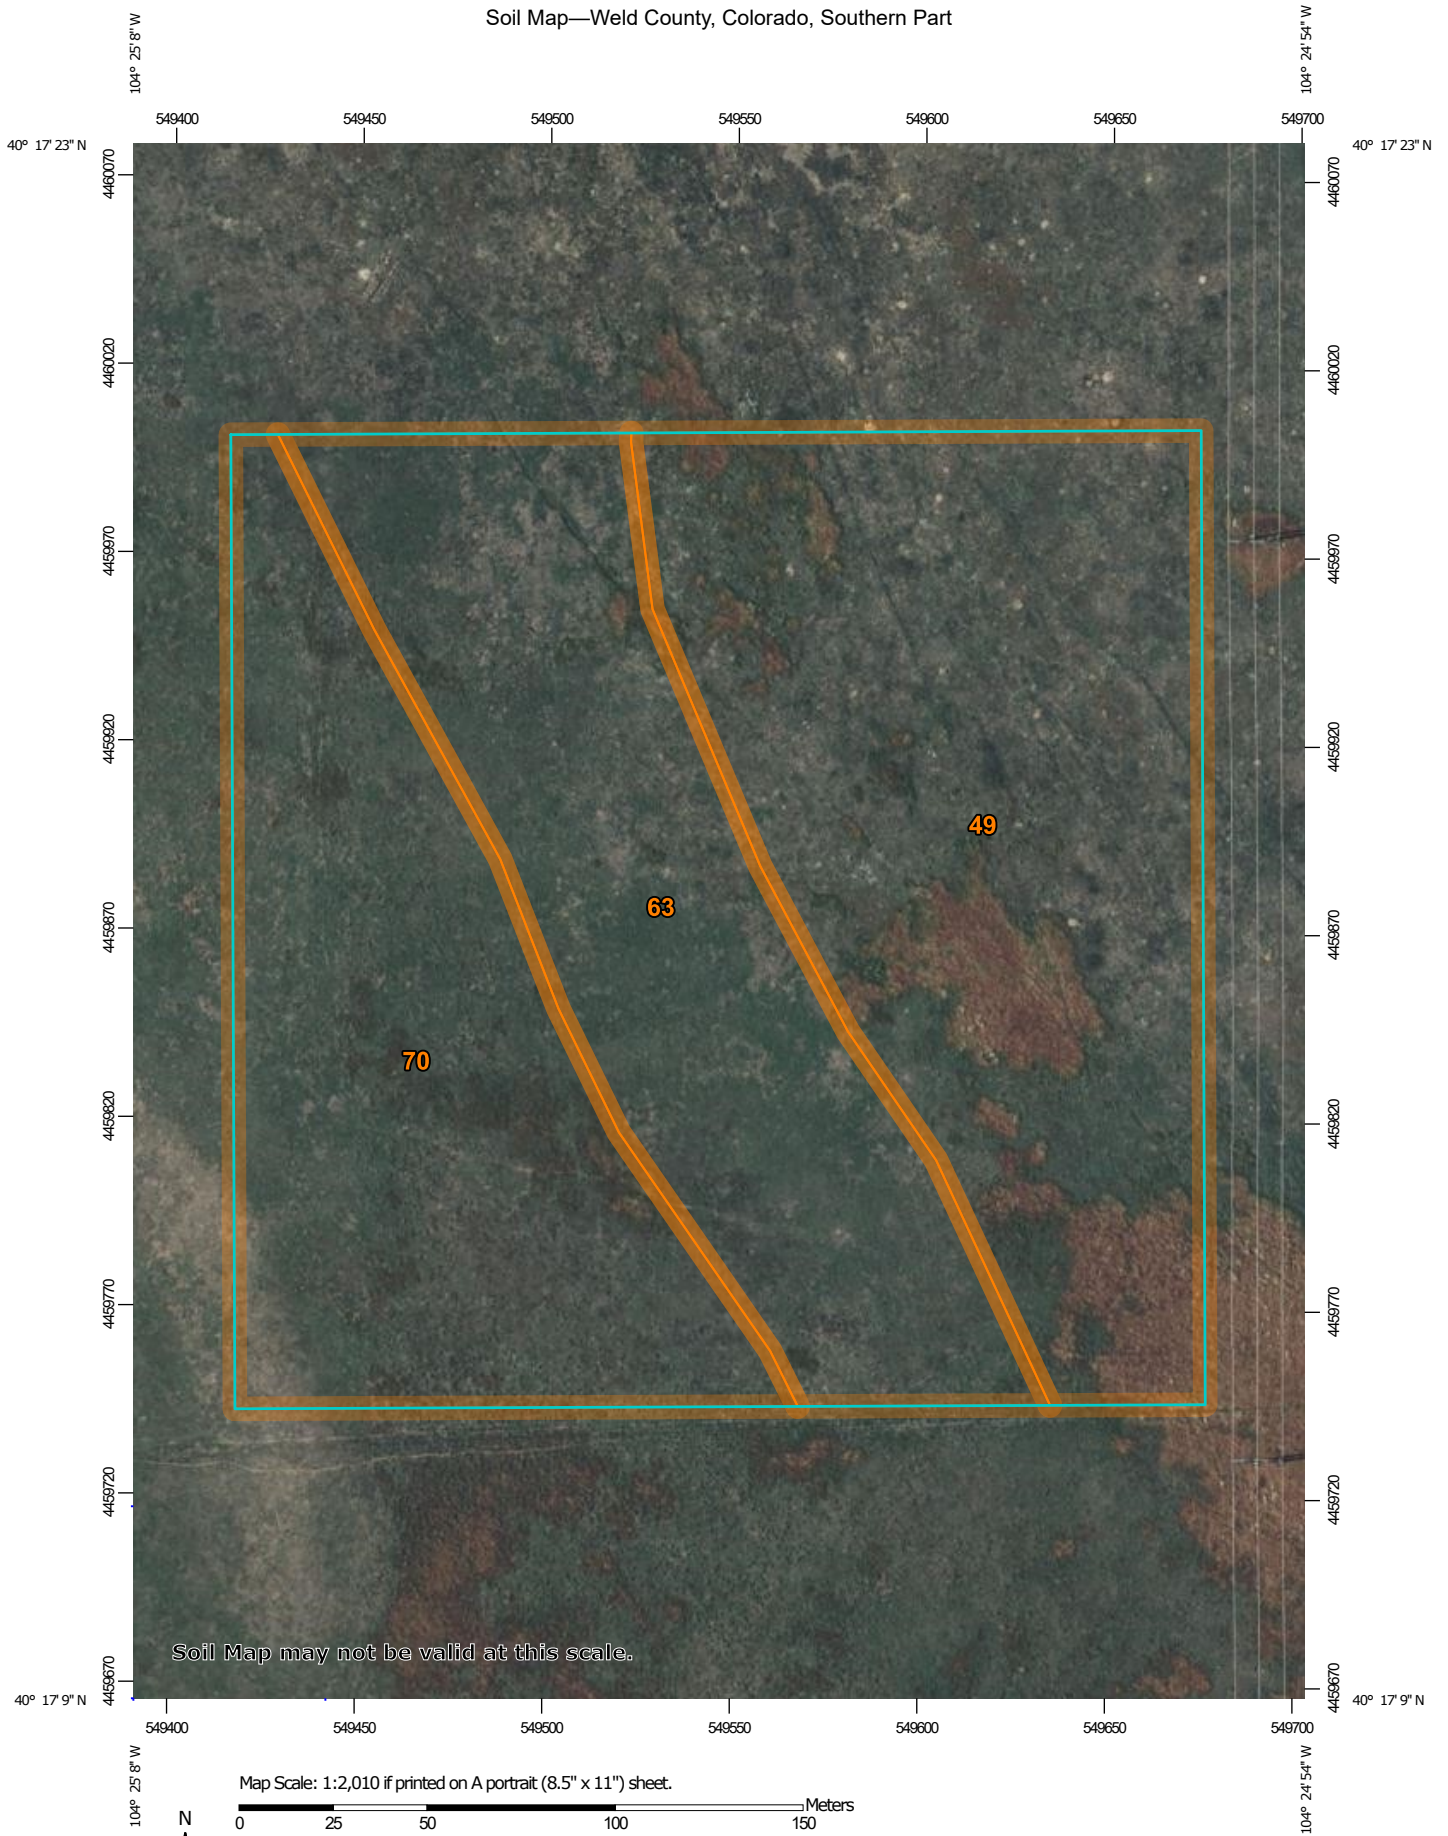

## MAP LEGEND

### Area of Interest (AOI)

 Area of Interest (AOI)

### Soils

 Soil Map Unit Polygons

 Soil Map Unit Lines

 Soil Map Unit Points

### Special Point Features



Blowout



Borrow Pit



Clay Spot



Closed Depression



Gravel Pit



Gravelly Spot



Landfill



Lava Flow



Marsh or swamp



Mine or Quarry



Miscellaneous Water



Perennial Water



Rock Outcrop



Saline Spot



Sandy Spot



Severely Eroded Spot



Sinkhole



Slide or Slip



Sodic Spot



Spoil Area



Stony Spot



Very Stony Spot



Wet Spot



Other



Special Line Features

### Water Features



Streams and Canals

### Transportation



Rails



Interstate Highways



US Routes



Major Roads



Local Roads

### Background



Aerial Photography

## MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service

Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Weld County, Colorado, Southern Part

Survey Area Data: Version 22, Aug 24, 2023

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 8, 2021—Jun 12, 2021

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
49	Osgood sand, 0 to 3 percent slopes	6.8	40.7%
63	Terry fine sandy loam, 3 to 9 percent slopes	4.8	29.1%
70	Valent sand, 3 to 9 percent slopes	5.0	30.2%
<b>Totals for Area of Interest</b>		<b>16.6</b>	<b>100.0%</b>

## Weld County, Colorado, Southern Part

### 49—Osgood sand, 0 to 3 percent slopes

#### Map Unit Setting

*National map unit symbol:* 362x

*Elevation:* 4,680 to 4,900 feet

*Mean annual precipitation:* 13 to 15 inches

*Mean annual air temperature:* 46 to 55 degrees F

*Frost-free period:* 140 to 150 days

*Farmland classification:* Farmland of statewide importance

#### Map Unit Composition

*Osgood and similar soils:* 85 percent

*Minor components:* 15 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Osgood

##### Setting

*Landform:* Plains

*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Parent material:* Eolian sands

##### Typical profile

*H1 - 0 to 22 inches:* sand

*H2 - 22 to 34 inches:* sandy loam

*H3 - 34 to 60 inches:* sand

##### Properties and qualities

*Slope:* 0 to 3 percent

*Depth to restrictive feature:* More than 80 inches

*Drainage class:* Well drained

*Runoff class:* Very low

*Capacity of the most limiting layer to transmit water (Ksat):* High  
(2.00 to 6.00 in/hr)

*Depth to water table:* More than 80 inches

*Frequency of flooding:* None

*Frequency of ponding:* None

*Maximum salinity:* Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

*Available water supply, 0 to 60 inches:* Low (about 4.8 inches)

##### Interpretive groups

*Land capability classification (irrigated):* 4e

*Land capability classification (nonirrigated):* 6e

*Hydrologic Soil Group:* A

*Ecological site:* R067BY015CO - Deep Sand

*Hydric soil rating:* No

### Minor Components

#### Valent

*Percent of map unit:* 10 percent

*Hydric soil rating:* No

#### Dailey

*Percent of map unit:* 5 percent

*Hydric soil rating:* No

## Data Source Information

Soil Survey Area: Weld County, Colorado, Southern Part

Survey Area Data: Version 22, Aug 24, 2023

## Weld County, Colorado, Southern Part

### 63—Terry fine sandy loam, 3 to 9 percent slopes

#### Map Unit Setting

*National map unit symbol:* 363f

*Elevation:* 4,500 to 5,000 feet

*Mean annual precipitation:* 13 to 15 inches

*Mean annual air temperature:* 46 to 48 degrees F

*Frost-free period:* 120 to 180 days

*Farmland classification:* Not prime farmland

#### Map Unit Composition

*Terry and similar soils:* 85 percent

*Minor components:* 15 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Terry

##### Setting

*Landform:* Plains

*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Parent material:* Residuum weathered from sandstone

##### Typical profile

*H1 - 0 to 6 inches:* fine sandy loam

*H2 - 6 to 18 inches:* fine sandy loam

*H3 - 18 to 37 inches:* fine sandy loam

*H4 - 37 to 41 inches:* weathered bedrock

##### Properties and qualities

*Slope:* 3 to 9 percent

*Depth to restrictive feature:* 20 to 40 inches to paralithic bedrock

*Drainage class:* Well drained

*Runoff class:* Medium

*Capacity of the most limiting layer to transmit water*

*(Ksat):* Moderately low to high (0.06 to 2.00 in/hr)

*Depth to water table:* More than 80 inches

*Frequency of flooding:* None

*Frequency of ponding:* None

*Calcium carbonate, maximum content:* 15 percent

*Maximum salinity:* Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

*Available water supply, 0 to 60 inches:* Low (about 4.4 inches)

##### Interpretive groups

*Land capability classification (irrigated):* 4s

*Land capability classification (nonirrigated):* 6e

*Hydrologic Soil Group:* B

*Ecological site:* R067BY024CO - Sandy Plains

*Hydric soil rating:* No

#### **Minor Components**

##### **Tassel**

*Percent of map unit:* 5 percent

*Hydric soil rating:* No

##### **Olney**

*Percent of map unit:* 5 percent

*Hydric soil rating:* No

##### **Otero**

*Percent of map unit:* 5 percent

*Hydric soil rating:* No

## **Data Source Information**

Soil Survey Area: Weld County, Colorado, Southern Part

Survey Area Data: Version 22, Aug 24, 2023



## Weld County, Colorado, Southern Part

### 70—Valent sand, 3 to 9 percent slopes

#### Map Unit Setting

*National map unit symbol:* 2tczf

*Elevation:* 3,050 to 5,150 feet

*Mean annual precipitation:* 12 to 18 inches

*Mean annual air temperature:* 48 to 55 degrees F

*Frost-free period:* 130 to 180 days

*Farmland classification:* Not prime farmland

#### Map Unit Composition

*Valent and similar soils:* 80 percent

*Minor components:* 20 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Valent

##### Setting

*Landform:* Dunes, hills

*Landform position (two-dimensional):* Summit, shoulder, backslope, footslope

*Landform position (three-dimensional):* Side slope, crest, head slope, nose slope

*Down-slope shape:* Convex, linear

*Across-slope shape:* Convex, linear

*Parent material:* Noncalcareous eolian sands

##### Typical profile

*A - 0 to 5 inches:* sand

*AC - 5 to 12 inches:* sand

*C1 - 12 to 30 inches:* sand

*C2 - 30 to 80 inches:* sand

##### Properties and qualities

*Slope:* 3 to 9 percent

*Depth to restrictive feature:* More than 80 inches

*Drainage class:* Excessively drained

*Runoff class:* Very low

*Capacity of the most limiting layer to transmit water (Ksat):* High to very high (6.00 to 39.96 in/hr)

*Depth to water table:* More than 80 inches

*Frequency of flooding:* None

*Frequency of ponding:* None

*Calcium carbonate, maximum content:* 1 percent

*Maximum salinity:* Nonsaline (0.0 to 1.9 mmhos/cm)

*Available water supply, 0 to 60 inches:* Very low (about 2.4 inches)

##### Interpretive groups

*Land capability classification (irrigated):* 4e



*Land capability classification (nonirrigated):* 6e  
*Hydrologic Soil Group:* A  
*Ecological site:* R067BY015CO - Deep Sand, R072XY109KS - Rolling Sands  
*Hydric soil rating:* No

### Minor Components

#### Dailey

*Percent of map unit:* 10 percent  
*Landform:* Interdunes  
*Landform position (two-dimensional):* Footslope, toeslope  
*Landform position (three-dimensional):* Base slope  
*Down-slope shape:* Linear  
*Across-slope shape:* Concave  
*Ecological site:* R067BY015CO - Deep Sand, R072XA021KS - Sands (North) (PE 16-20)  
*Hydric soil rating:* No

#### Vona

*Percent of map unit:* 5 percent  
*Landform:* Hills  
*Landform position (two-dimensional):* Shoulder, backslope, footslope  
*Landform position (three-dimensional):* Head slope, nose slope, side slope, base slope  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Ecological site:* R067BY024CO - Sandy Plains, R072XA022KS - Sandy (North) Draft (April 2010) (PE 16-20)  
*Hydric soil rating:* No

#### Haxtun

*Percent of map unit:* 5 percent  
*Landform:* Interdunes  
*Landform position (two-dimensional):* Footslope, toeslope  
*Landform position (three-dimensional):* Base slope  
*Down-slope shape:* Linear  
*Across-slope shape:* Concave  
*Ecological site:* R072XY111KS - Sandy Plains, R067BY024CO - Sandy Plains  
*Hydric soil rating:* No

## Data Source Information

Soil Survey Area: Weld County, Colorado, Southern Part  
Survey Area Data: Version 22, Aug 24, 2023