

Date: 08/05/24 –08/08/24

Operator: Wahlert AC 33-67Hn

Legal Location: NWNW                      SEC: 33                      7N                      63W

API #    05-123-34522                      Job Log

Weld County

08/05/24:    check psi: 8/30/0, pressure test equipment to address leaks, bleed down pressures, pumped on well to clean up returns 120bbls, pressure test plug in well @1500psi for 15mins, unland tubing, NU 10k to 5k spool, NU BOP, pressure test stack, SWI

08/06/24:    check psi: 0/0/0, unland tubing, remover hanger, stand back 21stands, paused work to wait for state approval to pump cmt, TIH w/21stands, tally and PU 14jts and 10' of subs, RU CMT, pump clean water ahead to clean up returns, pump 50skts cmt, RD CMT, LD sub and 14jts, circulated a full bottom up, stand back 40stands, LD 121jts, load well, SWI

08/07/24:    check psi: 0/0/0, RU WL, RIH w/logging tools, log from 2600' to surface, RIH w/CIBP, set @2513', OOH, RD WL, tally tubing, RIH w/40stands, LD 1jt, PU 10' subs to be @2513', RU CMT, pump 20bbls, pump 20skts cmt on CIBP, RD CMT, LD sub and 17jts, reverse circulate until clean, LD 28jts, RU CMT, pump cmt to surface, 220skts cmt, RD CMT, LD 34jts, topped off well, SWI

08/08/24:    ND BOP, SWI

\*\*\*All cement is 15.8 # Class "G" neat cement\*\*\*

**Cementing Contractor: AXIS Energy Services**

**Cementing Contractor Supervisor: Matt Bulinski**

**Operator Supervisor: Cyadam Dreiling**

**State Representative: Bret Evins**

**Wireline Contractor: AXIS Energy Services – E - Line**


# AXIS ENERGY SERVICES

OPERATOR: Chevron	DATE: 8/7/2024	AP# : 08-129-94322
LEASE NAME: Wahlert AC 33-67HN	RIG # Axis 726	COUNTY: Weld

	PLUG #1	PLUG #2	PLUG #3	PLUG #4	PLUG #5
CEMENT DATE:	8/6/2024	8/7/2024	8/7/2024		
SIZE OF HOLE OR PIPE IN WHICH PLUG PLACED:	7"	7"	7"		
DEPTH TO BOTTOM OF TUBING OR DRILL PIPE:	6,752'	2,513'	1,063'		
SACKS OF CEMENT USED (EACH PLUG):	50 sks	20 sks	220 sks		
SLURRY VOLUME PUMPED:	4 BBLs	4 BBLs	45 BBLs		
MEASURED TOP OF PLUG:	6,646'	2,407'	Surface		
SLURRY WT. #/GAL. :	15.8#	15.8#	15.8#		
TYPE CEMENT:	G Cement	G Cement	G Cement		
MUD FLUSH USED BBLs:	0 BBLs	0 BBLs	0 BBLs		
CALCIUM CHLORIDE USED LBS:	0 LBS	0 LBS	0 LBS		
SUGAR USED LBS:	0 LBS	50 LBS	50 LBS		

Jonathan Snyder  
SIGNATURE OF CEMENTER OR AUTHORIZED REPRESENTATIVE

Axis Energy Services  
NAME OF CEMENTING CO.

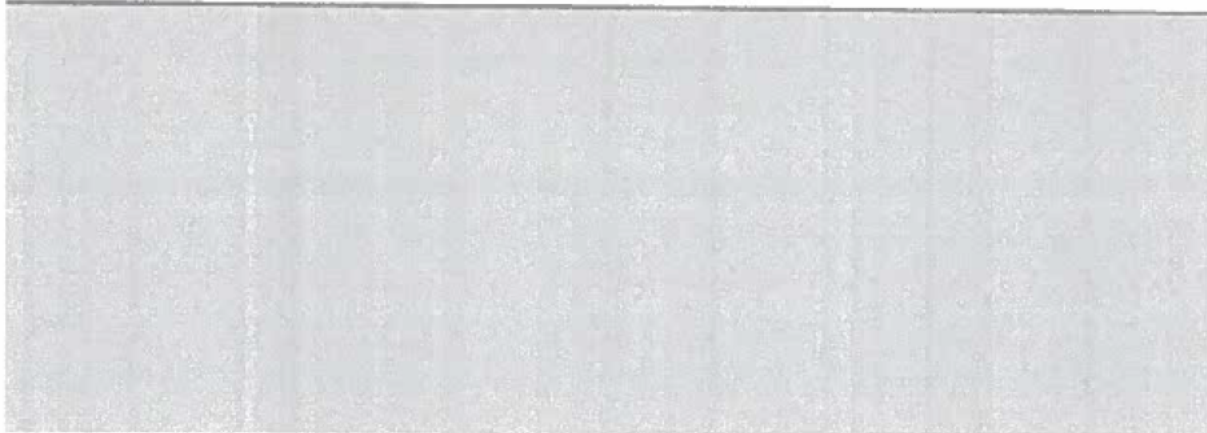

[illegible]

See page 2 for job log and any necessary remarks



Date of Service	Customer	Consultant	Well Name	Last Tick	Tick #
8/6/2024	Chevron	Cy Drilling	Wahlert Ac 33-67hn	No	3747
State	County	API	Rig	Mileage	Operator
Colorado	Weld	05-123-34522	Axis 726	0	Edgar Lozano Diaz

Job Specific Remarks

[illegible]

**Customer Name (print)**

(Signed





See page 2 for job log and any necessary remarks

Date of Service	Customer	Consultant	Well Name	Last Tick	Ticket #
8/7/2024	Chevron	Cy Drelling	Wahlert AC33-67HN	Yes	3755
State	County	API	Rig	Mileage	Operator
Colorado	Weir	05-123-34522	Axis 726	90	Edgar Lorenzo Diaz

Job 1 balance plug..... Job 2 surface

[illegible]

**Customer Name (print)**

(sign)