


Investment Equipment, LLC

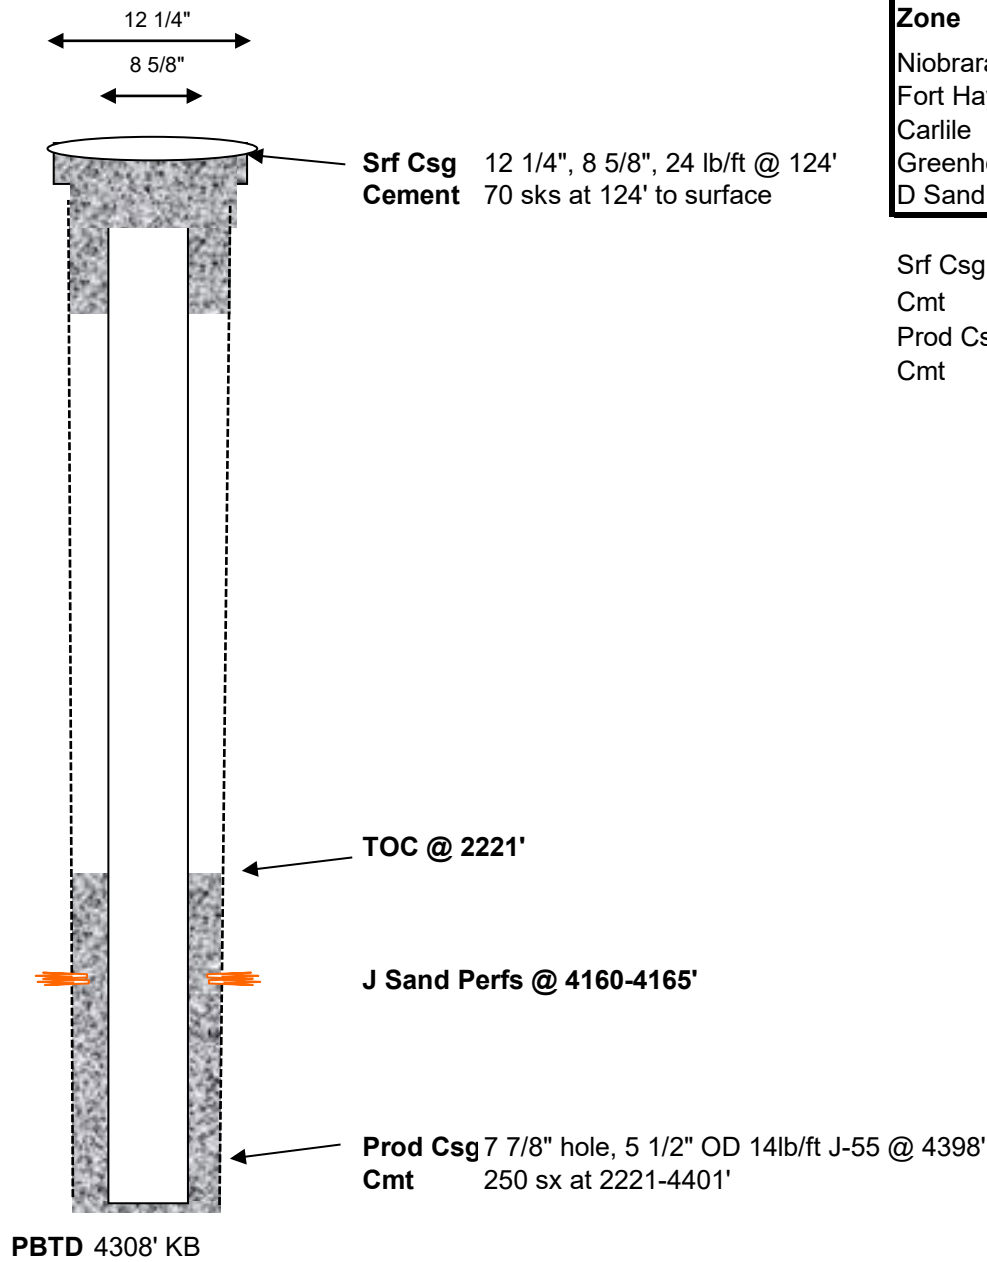

General Well Info			
Well Name:	Davis W T #3	Field:	Ranger
Diagram Date:	12/10/2024	County:	Washington
Srf Location:	NESE 30 3S51W 6	State:	Colorado
Spud:	11/10/1963	API #:	05-121-05373
GL Elev:	4756 ft		
Formation Tops			
Zone	Depth (ft)	Zone	Depth
Niobrara	3174	J Sand	4145
Fort Hays	3654	Skull Creek	4373
Carlile	3719		
Greenhorn	3810		
D Sand	4089'		

Srf Csg 12 1/4", 8 5/8", 24 lb/ft, J-55 @ 124'

Cmt 70 sks at 124' to surface

Prod Csg 7 7/8" hole, 5 1/2" OD 14lb/ft J-55 @ 4398'

Cmt 250 sx at 2221-4401'

TOC Calculation		
15# cement	1.51	cuft/sx
slurry density	250	sx
Volume of cement	377.5	cuft
Piping	5.7737	ft/cuft
Cement height	2180	ft
Casing Set Depth	4401	ft
Calculated TOC	2221	ft