


4,480 KB

DF

4,467 GL

Date:	4/19/2024
Well Name:	Pfaffly #1-12
Legal:	NWSW 12-11S-46W, API# 05-063-06353-00
County/State:	Kit Carson, Colorado

Ground Surface

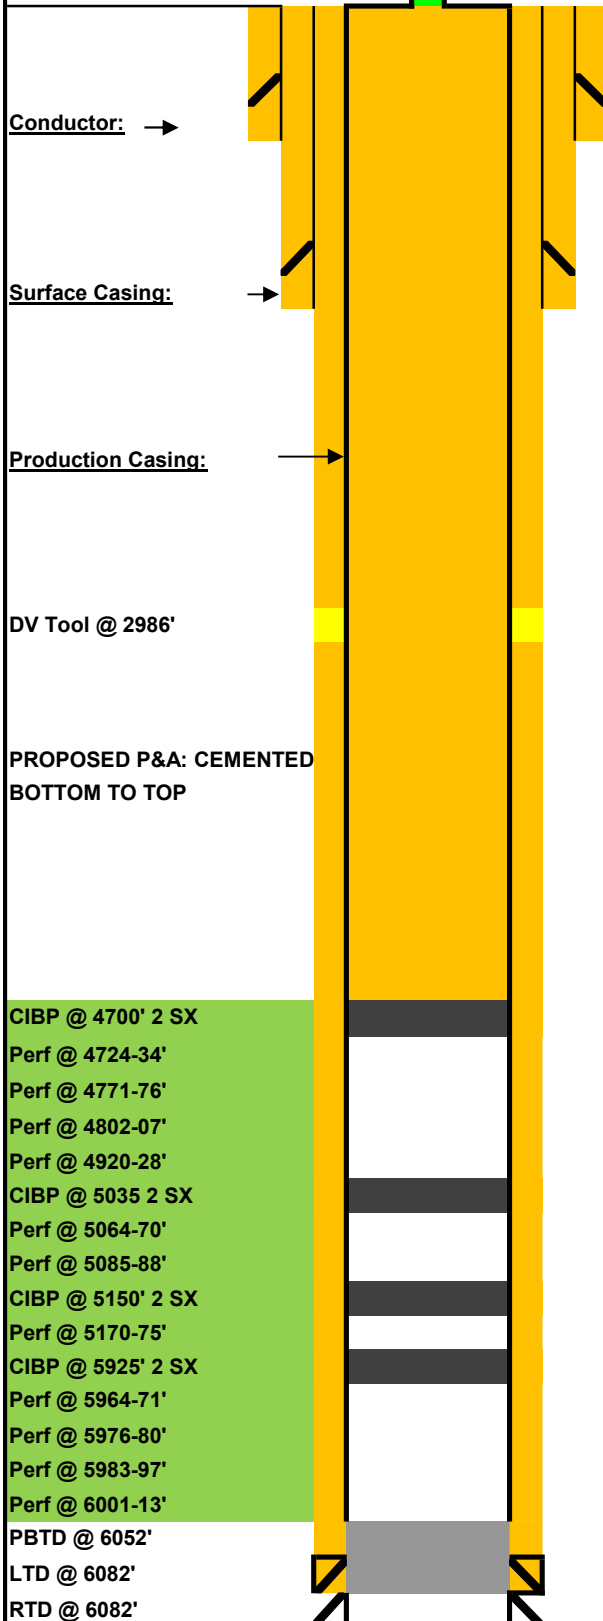

Tubulars	Size	Weight	Grade	Set @	SX CMT	TOC	
Conductor:	16	52.49	A500	10	20	surface	20
Surface:	8 5/8	36.00	J-55	651	575	surface	12 1/4
Production:	5 1/2	15.50	J-55	6081	440	surface	7 7/8
DV Tool	5 1/2	15.50	J-55	2986	400	surface	7 7/8
Tubing:	2 3/8	4.70	J-55	5032			

Production Casing:

5 1/2" 15.5 J-55	6,058.85
Shoe joint	20.87
Float shoe	0.83
	-
Total Length	6,080.55

Cement 1 440 sks Class H, 2% gel, 10% salt, .5% C17, .1% C51, 2# Tactical blitz

Cement 2 400 sks Class A 50/50/8 .3%C19

Cement 3

Rod String:		Length	# of	Grade
	Polished Rod	0.00		
	Ponies	0.00		
3/4"	Taper 1	4375.00	175	KD
7/8"	Taper 2	600.00	24	KD
	Taper 3	0.00		
	Taper 4	0.00		
	Taper 5	0.00		
	Ponies	0.00		
1 3/4" x 30"	Pump	2.50		
	Total Length	4977.50		

Production Tubing:

	KB Correction	Grade
159 JTS - 2 3/8" 8RD TBG	10.00	NEW
2" x 1 3/4" x 20' x 23' x 24'	4994.72	NEW
5 1/2" x 2 3/8" SL PKR	24.00	NEW
2" SN	2.91	RERUN
	1.10	
Total Length	5032.73	

Comments: 3000 PSI flanged tubing support with Larkin slip adaptor bolted on.