PIONEER
Pioneer Energy Services

Radial Cement Bond Log With Gamma Ray/CCL/VDL And Cement Map

Company	ANADARKO PETROLEUM CORPORATION
Well	D & C Farms 35N-33HZ
Field	Wattenberg
County	Weld
State	Colorado

Company ANADARKO PETROLEUM CORPORATION
Well D & C Farms 35N-33HZ
Field Wattenberg
County Weld State Colorado

Location: API # : 05-123-37890
SHL: 501' FNL & 1518' FSL
SESW
SEC 28 TWP 1N RGE 67W

Other Services
3.75
JB/GR
Caliper

Permanent Datum	Ground Level	Elevation 5008'	Elevation
Log Measured From	Kelly Bushing		K.B. 5024'
Drilling Measured From	Kelly Bushing	16' A.P.D.	D.F. 5023'
			G.L. 5008'

Date	23-Nov_2013
Run Number	Two
Depth Driller	12,735'
Depth Logger	7100'
Bottom Logged Interval	7098'
Top Log Interval	Surface
Open Hole Size	8.75"
Type Fluid	Water
Density / Viscosity	8.34ppg
Max. Recorded Temp.	NR
Estimated Cement Top	606'
Time Well Ready	On Arrival
Time Logger on Bottom	15:30
Equipment Number	53
Location	Fort Morgan
Recorded By	Bruce Miller
Witnessed By	Mr. Kent Evers

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	9.625"	36#	Surface	1029'
Prot. String				
Production String	7"	26#	Surface	7537'
Liner	4.5"	11.6#	6976'	12,666'

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SO# 205326

THANK YOU FOR USING PIONEER ENERGY!

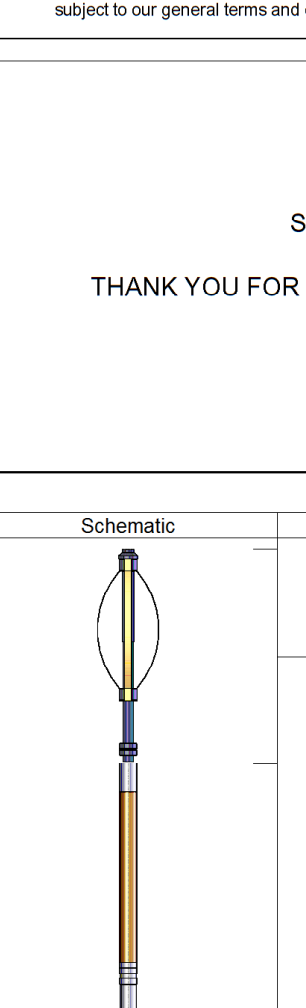

Sensor	Offset (ft)	Description	Len (ft)	OD (in)	Wt (lb)
		PTS275	2.83	2.75	
WVF3FT WVFCAL WVFS1 WVFS2 WVFS3 WVFS4 WVFS5 WVFS6 WVFS7 WVFS8 WVF5FT	11.86 11.86 11.86 11.86 11.86 11.86 11.86 11.86 11.86 11.86 10.78	RBT-Probe (Base) Probe Radii Bond Tool with Digital Telemetry	8.92	2.75	90.00
		PTS275	2.83	2.75	
CCL TEMP GR	3.84 3.14 2.30	GCT-GRCCLTEMP (130608) Probe GCT	4.69	2.75	100.00

Dataset: d_and_c_farms_35n_33hz.db: field/well/run2/pass2
Total Length: 19.27 ft
Total Weight: 190.00 lb
O.D. 2.75 in

PIONEER
Pioneer Energy Services

Main Pass

Logged With 2800 PSI Applied At Surface

Database File: d_and_c_farms_35n_33hz.db
Dataset Pathname: run2/pass2
Presentation Format: scbl02
Dataset Creation: Sat Nov 23 16:44:20 2013 by Calc 7.0 B1
Charted by: Depth in Feet scaled 1:240

-4 CCL 1	0 GR (GAPI) 200	0 AMP (mV) 100	0 AMPAVG 150	200 VDL 1200	1 SECTOR MAP 8
	TT3FT	0 AMPx5 (mV) 20	0 AMPMAX 150		25 75
	360 (usec) 260		0 AMPMIN 150		🟥 🟨 🟩 🟦

Calibration Report

Database File: d_and_c_farms_35n_33hz.db
Dataset Pathname: run2/pass1
Dataset Creation: Sat Nov 23 15:02:58 2013 by Log 7.0 B1

Gamma Ray Calibration Report

Serial Number:	130608	
Tool Model:	GRCCLTEMP	
Performed:	Sun Jun 13 13:33:21 1993	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	1.0000	GAPI/cps

Temperature Calibration Report

Serial Number:	130608	
Tool Model:	GRCCLTEMP	
Performed:	Thu Aug 15 07:56:46 2013	
	Reference	Reading
Low Reference:	100.00 degF	6509.65degF
High Reference:	350.00 degF	27350.70degF
Gain:	0.01	
Offset:	21.91	
Delta Spacing	1	

Segmented Cement Bond Log Calibration Report

Serial Number:	Base	
Tool Model:	Probe	
Calibration Casing Diameter:	7.000	in
Calibration Depth:	2886.908	ft

Master Calibration, performed Sat Nov 23 14:37:40 2013:

	Raw (v)		Calibrated (mv)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
3'	-0.014	0.640	2.000	62.165	78.942	3.295
CAL	1.000	1.005				
5'	0.164	0.735	2.000	62.165	105.511	-15.344
SUM						
S1	-0.068	0.653	0.000	95.000	116.782	8.902
S2	-0.077	0.656	0.000	95.000	114.657	9.925
S3	-0.042	0.647	0.000	95.000	122.870	5.787
S4	-0.030	0.638	0.000	95.000	127.328	4.243
S5	-0.043	0.643	0.000	95.000	123.405	5.983
S6	-0.047	0.653	0.000	95.000	120.855	6.333
S7	-0.030	0.654	0.000	95.000	123.986	4.142
S8	-0.077	0.656	0.000	95.000	114.614	10.017

Internal Reference Calibration, performed Wed Aug 21 11:08:58 2013:

	Raw (v)		Calibrated (v)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
CAL	0.000	0.000	1.000	1.005	1.000	0.000

Air Zero Calibration, performed Sat Nov 09 07:23:33 2013:

	Raw (v)	Calibrated (v)	Results
	Zero	Zero	Offset
3'	0.000	0.000	0.000
5'	0.000	0.000	0.000
SUM			
S1	0.000	0.000	0.000
S2	0.000	0.000	0.000
S3	0.000	0.000	0.000
S4	0.000	0.000	0.000
S5	0.000	0.000	0.000
S6	0.000	0.000	0.000
S7	0.000	0.000	0.000
S8	0.000	0.000	0.000

PIONEER
Pioneer Energy Services

Company	ANADARKO PETROLEUM CORPORAT
Well	D & C Farms 35N-33HZ
Field	Wattenberg
County	Weld
State	Colorado