

MALLARD EXPLORATION

WELD COUNTY, COLORADO (NAD 83)

NE NW SEC. 31 T9N R59W 6th P.M.



SHULL FED 31-32-4HN

ORIGINAL WELLBORE

17 December, 2017

Plan: PROPOSAL #1



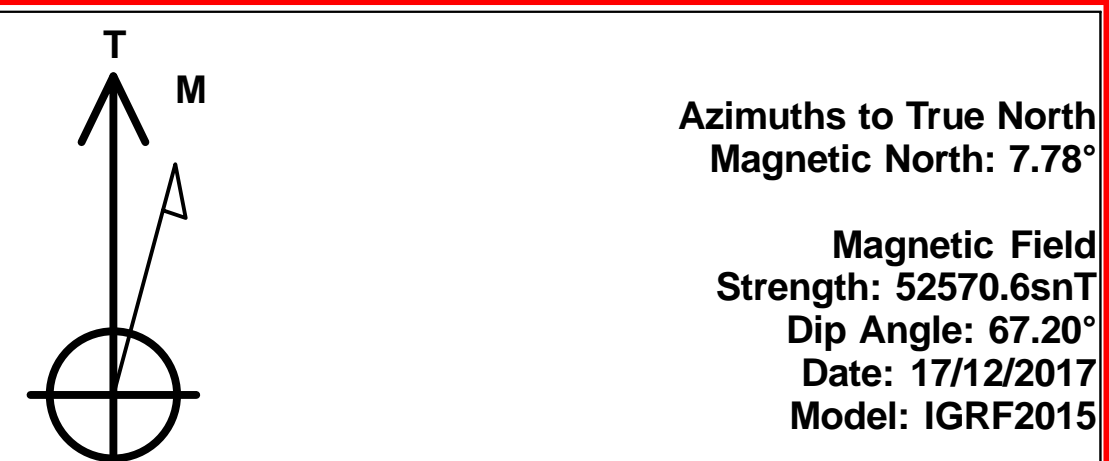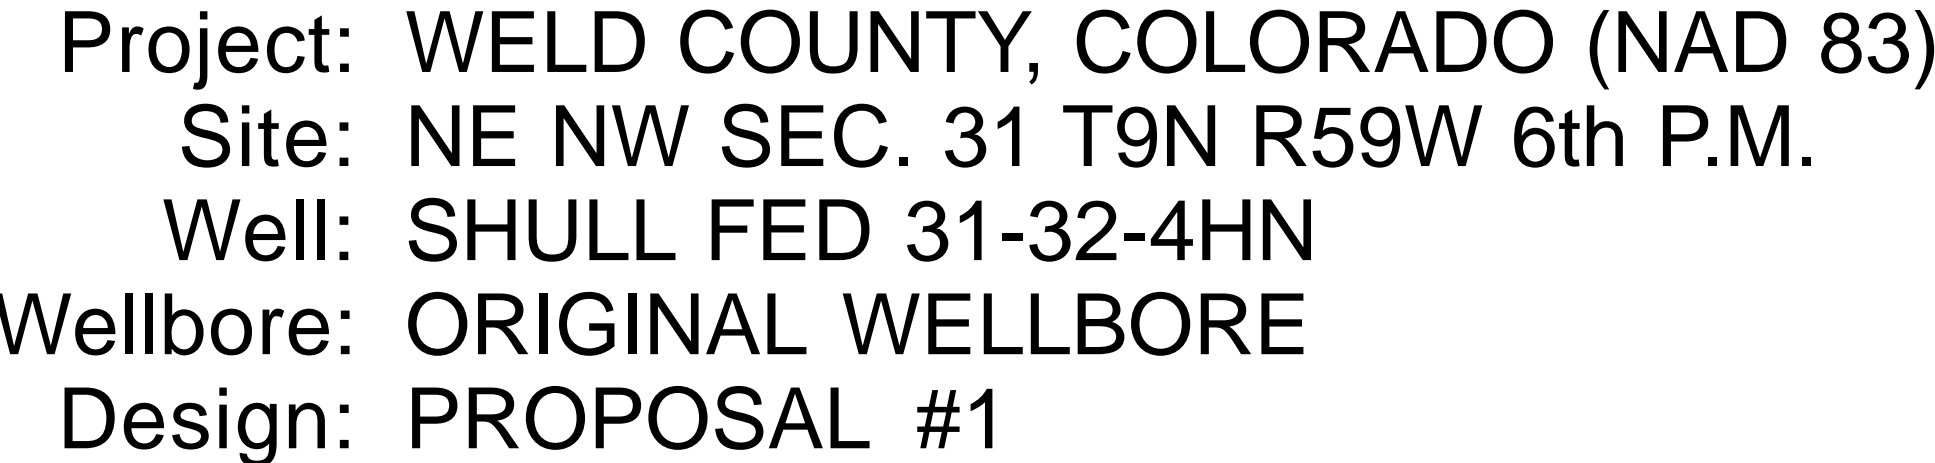

FORMATION TOP DETAILS		
TVDPath	MDPath	Formation
508.00	508.00	Fox Hills Base
1446.00	1446.00	Pierre Shale Top
3234.00	3278.50	Richard Sandstone
3355.00	3404.71	Parkman Sandstone
4038.00	4117.10	Sussex Sandstone
4527.00	4627.14	Shannon Sandstone
5922.00	6079.40	Sharon Springs
5987.00	6178.80	Niobrara A Chalk
6017.00	6233.63	Niobrara A Chalk Base
6057.00	6325.46	Niobrara B1 Chalk Top
6074.00	6378.79	Niobrara B1 Chalk Base
6096.00	6538.08	Niobrara B2 Chalk Top (Target)


PROPOSED LOCAL COORDINATES:

SHL:942ft FNL & 2148ft FWL of Sec 31

HZ LP: 1705ft FNL & 2140ft FEL of Sec 31

BHL: 1705ft FNL & 460ft FEL of Sec 32

ANNOTATIONS									
	TVD	MD	Inc	Azi	+N/-S	+E/-W	VSect	Dep	Annotation
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL: 942ft FNL & 2148ft FWL of Sec 31
	1650.00	1650.00	0.00	0.00	0.00	0.00	0.00	0.00	START NUDGE (2°/100ft BUR)
	2464.33	2475.72	16.51	151.51	-103.87	56.37	65.76	118.18	EOB TO 16.51° INC
	4608.71	4712.36	16.51	151.51	-662.67	359.60	419.51	753.96	END OF TANGENT
	5423.04	5538.08	0.00	0.00	-766.54	415.97	485.27	872.13	EOD TO VERTICAL
	5523.04	5638.08	0.00	0.00	-766.54	415.97	485.27	872.13	KOP (10°/100ft BUR)
	6096.00	6538.08	90.00	89.78	-764.34	988.92	1055.55	1445.09	HZ LP: 1705ft FNL & 2140ft FEL of Sec 31
	6096.00	13471.96	90.00	89.78	-737.94	7922.76	7957.05	8378.97	BHL: 1705ft FNL & 460ft FEL of Sec 32
WELLBORE TARGET DETAILS (LAT/LONG)									
	Name		TVD	+N/-S	+E/-W		Latitude		Longitude
	KOP - SHULL FED 31-32-4HN		5523.04	-766.54	415.97		40.709274		-104.021085
	HZ LP - SHULL FED 31-32-4HN		6096.00	-764.34	988.92		40.709280		-104.019018
	BHL - SHULL FED 31-32-4HN		6096.00	-737.94	7922.76		40.709349		-103.994008

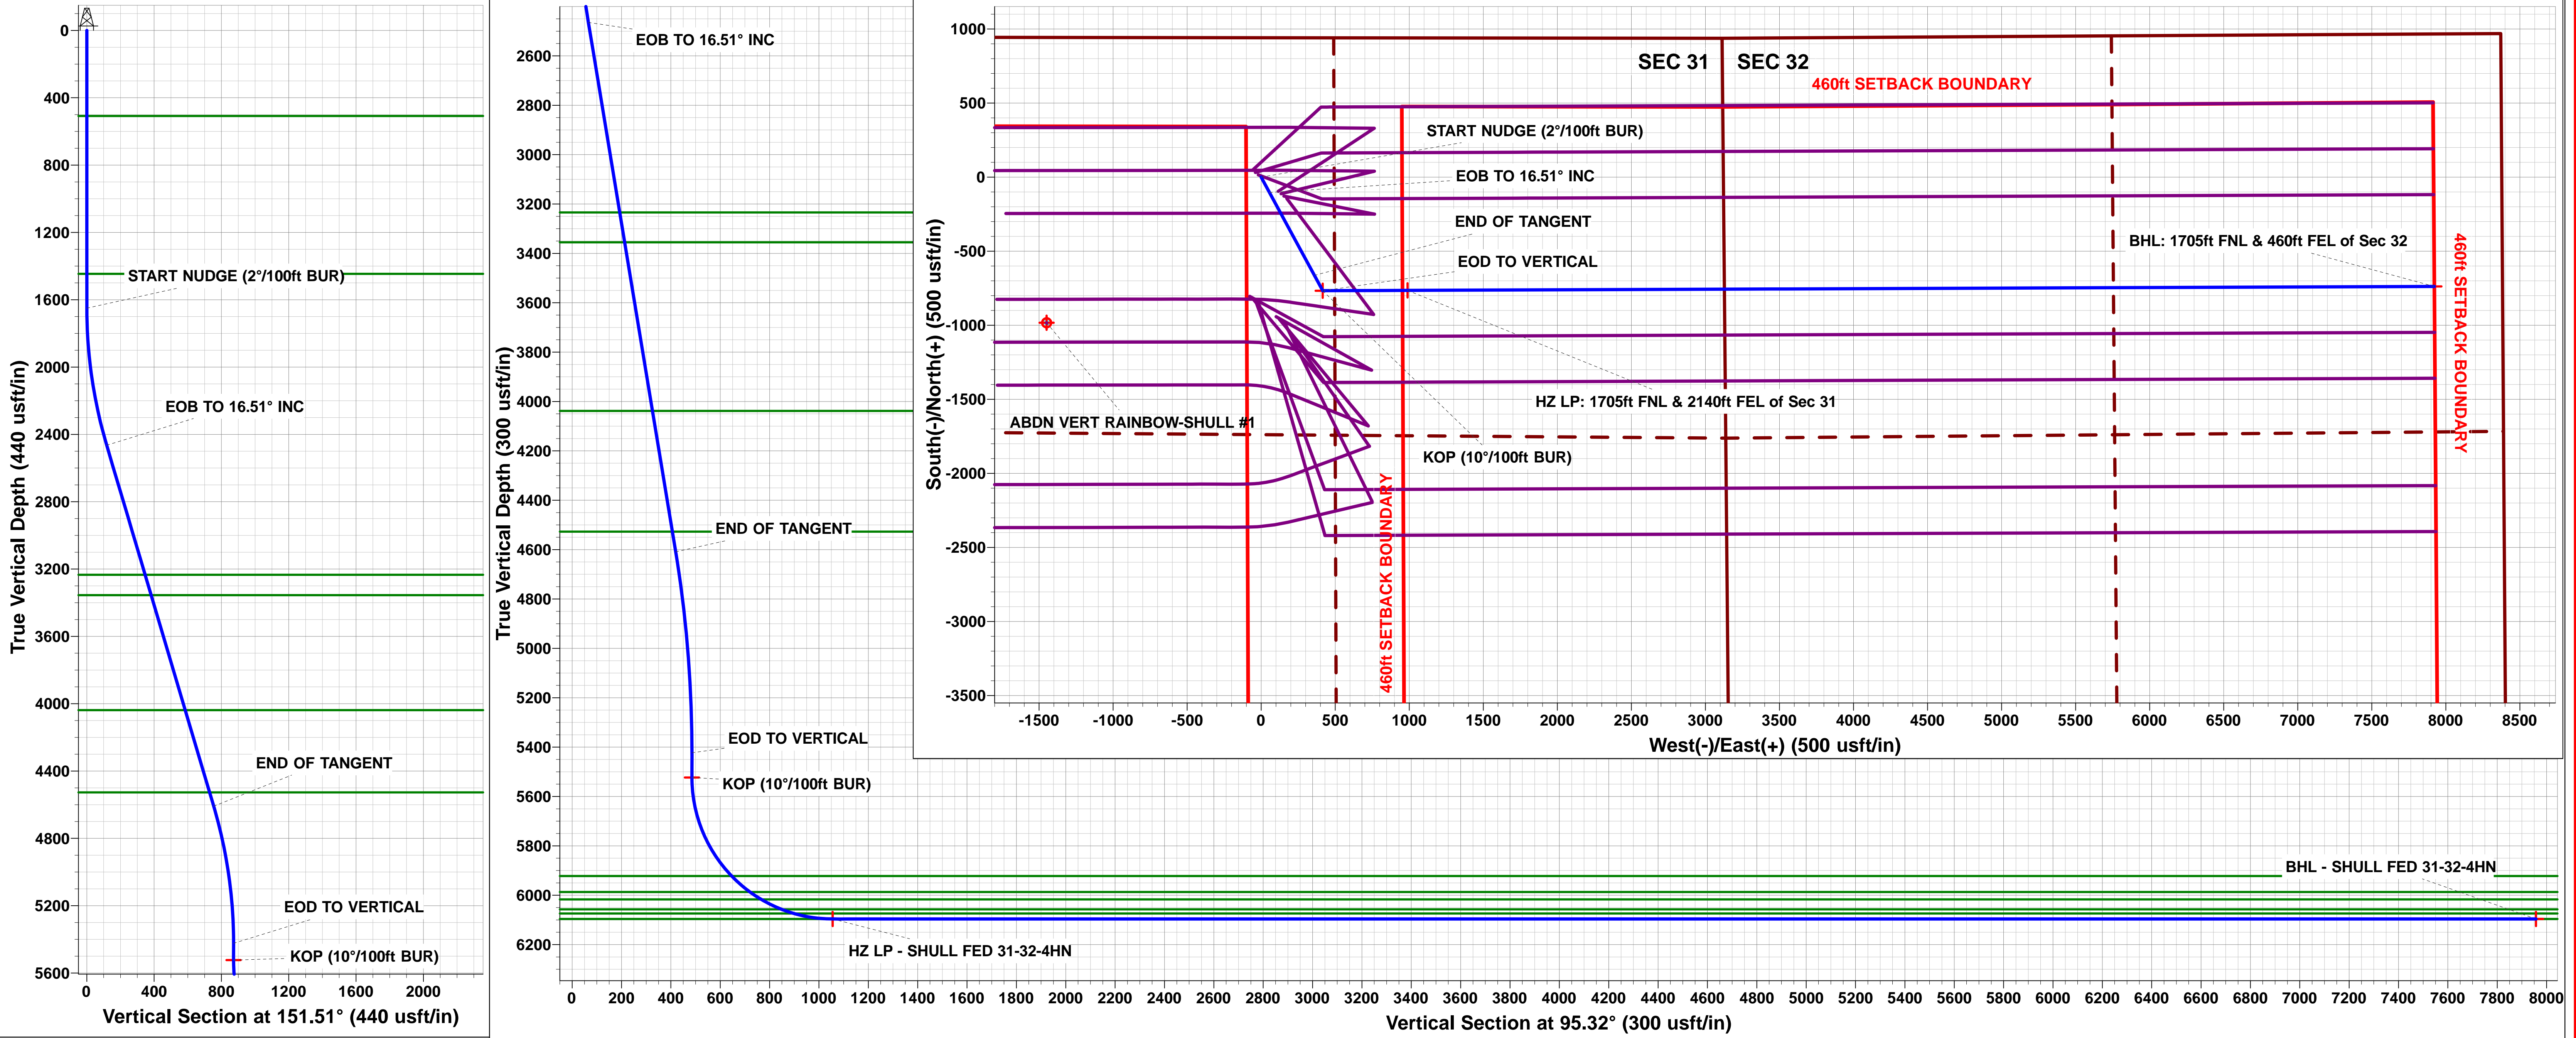

Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well SHULL FED 31-32-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Site:	NE NW SEC. 31 T9N R59W 6th P.M.	North Reference:	True
Well:	SHULL FED 31-32-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #1		

Project	WELD COUNTY, COLORADO (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	NE NW SEC. 31 T9N R59W 6th P.M.		
Site Position:		Northing:	1,505,316.95 usft
From:	Lat/Long	Easting:	3,409,683.34 usft
Position Uncertainty:	0.00 usft	Slot Radius:	1.10000ft
		Latitude:	40.711115
		Longitude:	-104.022169
		Grid Convergence:	0.95 °

Well	SHULL FED 31-32-4HN		
Well Position	+N-S	95.81 usft	Northing:
	+E-W	-115.33 usft	Easting:
Position Uncertainty		0.00 usft	Wellhead Elevation:
			Latitude:
			Longitude:
			Ground Level:

Wellbore	ORIGINAL WELLBORE				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	17/12/2017	7.78	67.20	52,571

Design	PROPOSAL #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N-S (usft)	+E-W (usft)	Direction (°)
	6,096.00	0.00	0.00	95.32

Plan Sections											
MD (usft)	Inc (°)	Azi (°)	Vertical Depth	SS (usft)	+N-S (usft)	+E-W (usft)	Dogleg Rate (°/100usf)	Build Rate (°/100usf)	Turn Rate (°/100usf)	TFO (°)	Target
0.00	0.00	0.00	0.00	-4,925.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,650.00	0.00	0.00	1,650.00	-3,275.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,475.72	16.51	151.51	2,464.33	-2,460.67	-103.87	56.37	2.00	2.00	0.00	151.51	
4,712.36	16.51	151.51	4,608.71	-316.29	-662.67	359.60	0.00	0.00	0.00	0.00	
5,538.08	0.00	0.00	5,423.04	498.04	-766.54	415.97	2.00	-2.00	0.00	180.00	
5,638.08	0.00	0.00	5,523.04	598.04	-766.54	415.97	0.00	0.00	0.00	0.00	KOP - SHULL FED
6,538.08	90.00	89.78	6,096.00	1,171.00	-764.34	988.92	10.00	10.00	9.98	89.78	HZ LP - SHULL FEI
13,471.96	90.00	89.78	6,096.00	1,171.00	-737.94	7,922.76	0.00	0.00	0.00	87.33	BHL - SHULL FED

Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well SHULL FED 31-32-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Site:	NE NW SEC. 31 T9N R59W 6th P.M.	North Reference:	True
Well:	SHULL FED 31-32-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #1		

Planned Survey

MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
SHL: 942ft FNL & 2148ft FWL of Sec 31										
0.00	0.00	0.00	0.00	4,925.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	4,825.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	4,725.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	4,625.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	4,525.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	4,425.00	0.00	0.00	0.00	0.00	0.00	0.00
Fox Hills Base										
508.00	0.00	0.00	508.00	4,417.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	4,325.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	4,225.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	4,125.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	4,025.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	3,925.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	3,825.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	3,725.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	3,625.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	3,525.00	0.00	0.00	0.00	0.00	0.00	0.00
Pierre Shale Top										
1,446.00	0.00	0.00	1,446.00	3,479.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	3,425.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	3,325.00	0.00	0.00	0.00	0.00	0.00	0.00
START NUDGE (2°/100ft BUR)										
1,650.00	0.00	0.00	1,650.00	3,275.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	1.00	151.51	1,700.00	3,225.00	-0.38	0.21	0.24	2.00	2.00	0.00
1,800.00	3.00	151.51	1,799.93	3,125.07	-3.45	1.87	2.18	2.00	2.00	0.00
1,900.00	5.00	151.51	1,899.68	3,025.32	-9.58	5.20	6.07	2.00	2.00	0.00
2,000.00	7.00	151.51	1,999.13	2,925.87	-18.77	10.18	11.88	2.00	2.00	0.00
2,100.00	9.00	151.51	2,098.15	2,826.85	-31.00	16.82	19.62	2.00	2.00	0.00
2,200.00	11.00	151.51	2,196.63	2,728.37	-46.26	25.10	29.29	2.00	2.00	0.00
2,300.00	13.00	151.51	2,294.44	2,630.56	-64.53	35.02	40.85	2.00	2.00	0.00
2,400.00	15.00	151.51	2,391.46	2,533.54	-85.80	46.56	54.31	2.00	2.00	0.00
EOB TO 16.51° INC										
2,475.72	16.51	151.51	2,464.33	2,460.67	-103.87	56.37	65.76	2.00	2.00	0.00
2,500.00	16.51	151.51	2,487.61	2,437.39	-109.94	59.66	69.60	0.00	0.00	0.00
2,600.00	16.51	151.51	2,583.49	2,341.51	-134.92	73.22	85.41	0.00	0.00	0.00
2,700.00	16.51	151.51	2,679.36	2,245.64	-159.90	86.77	101.23	0.00	0.00	0.00
2,800.00	16.51	151.51	2,775.24	2,149.76	-184.89	100.33	117.05	0.00	0.00	0.00
2,900.00	16.51	151.51	2,871.11	2,053.89	-209.87	113.89	132.86	0.00	0.00	0.00
3,000.00	16.51	151.51	2,966.99	1,958.01	-234.86	127.45	148.68	0.00	0.00	0.00
3,100.00	16.51	151.51	3,062.86	1,862.14	-259.84	141.00	164.49	0.00	0.00	0.00
3,200.00	16.51	151.51	3,158.74	1,766.26	-284.82	154.56	180.31	0.00	0.00	0.00
Richard Sandstone										
3,278.50	16.51	151.51	3,234.00	1,691.00	-304.44	165.21	192.73	0.00	0.00	0.00
3,300.00	16.51	151.51	3,254.61	1,670.39	-309.81	168.12	196.13	0.00	0.00	0.00
3,400.00	16.51	151.51	3,350.49	1,574.51	-334.79	181.68	211.94	0.00	0.00	0.00
Parkman Sandstone										
3,404.71	16.51	151.51	3,355.00	1,570.00	-335.97	182.32	212.69	0.00	0.00	0.00
3,500.00	16.51	151.51	3,446.36	1,478.64	-359.78	195.24	227.76	0.00	0.00	0.00
3,600.00	16.51	151.51	3,542.24	1,382.76	-384.76	208.79	243.58	0.00	0.00	0.00
3,700.00	16.51	151.51	3,638.11	1,286.89	-409.74	222.35	259.39	0.00	0.00	0.00
3,800.00	16.51	151.51	3,733.99	1,191.01	-434.73	235.91	275.21	0.00	0.00	0.00
3,900.00	16.51	151.51	3,829.86	1,095.14	-459.71	249.47	291.03	0.00	0.00	0.00

Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well SHULL FED 31-32-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Site:	NE NW SEC. 31 T9N R59W 6th P.M.	North Reference:	True
Well:	SHULL FED 31-32-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #1		

Planned Survey

MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,000.00	16.51	151.51	3,925.74	999.26	-484.70	263.02	306.84	0.00	0.00	0.00
4,100.00	16.51	151.51	4,021.61	903.39	-509.68	276.58	322.66	0.00	0.00	0.00
Sussex Sandstone										
4,117.10	16.51	151.51	4,038.00	887.00	-513.95	278.90	325.36	0.00	0.00	0.00
4,200.00	16.51	151.51	4,117.49	807.51	-534.66	290.14	338.47	0.00	0.00	0.00
4,300.00	16.51	151.51	4,213.36	711.64	-559.65	303.70	354.29	0.00	0.00	0.00
4,400.00	16.51	151.51	4,309.23	615.77	-584.63	317.26	370.11	0.00	0.00	0.00
4,500.00	16.51	151.51	4,405.11	519.89	-609.62	330.81	385.92	0.00	0.00	0.00
4,600.00	16.51	151.51	4,500.98	424.02	-634.60	344.37	401.74	0.00	0.00	0.00
Shannon Sandstone										
4,627.14	16.51	151.51	4,527.00	398.00	-641.38	348.05	406.03	0.00	0.00	0.00
4,700.00	16.51	151.51	4,596.86	328.14	-659.58	357.93	417.56	0.00	0.00	0.00
END OF TANGENT										
4,712.36	16.51	151.51	4,608.71	316.29	-662.67	359.60	419.51	0.00	0.00	0.00
4,800.00	14.76	151.51	4,693.10	231.90	-683.43	370.87	432.66	2.00	-2.00	0.00
4,900.00	12.76	151.51	4,790.23	134.77	-704.34	382.22	445.89	2.00	-2.00	0.00
5,000.00	10.76	151.51	4,888.12	36.88	-722.26	391.94	457.23	2.00	-2.00	0.00
5,100.00	8.76	151.51	4,986.67	-61.67	-737.16	400.03	466.67	2.00	-2.00	0.00
5,200.00	6.76	151.51	5,085.75	-160.75	-749.03	406.47	474.18	2.00	-2.00	0.00
5,300.00	4.76	151.51	5,185.24	-260.24	-757.85	411.25	479.77	2.00	-2.00	0.00
5,400.00	2.76	151.51	5,285.02	-360.02	-763.62	414.38	483.42	2.00	-2.00	0.00
5,500.00	0.76	151.51	5,384.96	-459.96	-766.32	415.85	485.13	2.00	-2.00	0.00
EOD TO VERTICAL										
5,538.08	0.00	0.00	5,423.04	-498.04	-766.54	415.97	485.27	2.00	-2.00	0.00
5,600.00	0.00	0.00	5,484.96	-559.96	-766.54	415.97	485.27	0.00	0.00	0.00
KOP (10°/100ft BUR)										
5,638.08	0.00	0.00	5,523.04	-598.04	-766.54	415.97	485.27	0.00	0.00	0.00
5,700.00	6.19	89.78	5,584.84	-659.84	-766.53	419.31	488.59	10.00	10.00	0.00
5,800.00	16.19	89.78	5,682.82	-757.82	-766.45	438.70	507.89	10.00	10.00	0.00
5,900.00	26.19	89.78	5,775.94	-850.94	-766.31	474.80	543.82	10.00	10.00	0.00
6,000.00	36.19	89.78	5,861.37	-936.37	-766.12	526.53	595.31	10.00	10.00	0.00
Sharon Springs										
6,079.40	44.13	89.78	5,922.00	-997.00	-765.92	577.69	646.24	10.00	10.00	0.00
6,100.00	46.19	89.78	5,936.53	-1,011.53	-765.86	592.30	660.78	10.00	10.00	0.00
Niobrara A Chalk										
6,178.80	54.07	89.78	5,987.00	-1,062.00	-765.63	652.74	720.93	10.00	10.00	0.00
6,200.00	56.19	89.78	5,999.12	-1,074.12	-765.56	670.13	738.24	10.00	10.00	0.00
Niobrara A Chalk Base										
6,233.63	59.56	89.78	6,017.00	-1,092.00	-765.45	698.61	766.58	10.00	10.00	0.00
6,300.00	66.19	89.78	6,047.24	-1,122.24	-765.23	757.64	825.34	10.00	10.00	0.00
Niobrara B1 Chalk Top										
6,325.46	68.74	89.78	6,057.00	-1,132.00	-765.14	781.15	848.75	10.00	10.00	0.00
Niobrara B1 Chalk Base										
6,378.79	74.07	89.78	6,074.00	-1,149.00	-764.94	831.68	899.04	10.00	10.00	0.00
6,400.00	76.19	89.78	6,079.44	-1,154.44	-764.86	852.18	919.44	10.00	10.00	0.00
6,500.00	86.19	89.78	6,094.74	-1,169.74	-764.48	950.87	1,017.68	10.00	10.00	0.00
HZ LP: 1705ft FNL & 2140ft FEL of Sec 31 - Niobrara B2 Chalk Top (Target)										
6,538.08	90.00	89.78	6,096.00	-1,171.00	-764.34	988.92	1,055.55	10.00	10.00	0.00
6,600.00	90.00	89.78	6,096.00	-1,171.00	-764.10	1,050.85	1,117.18	0.00	0.00	0.00
6,700.00	90.00	89.78	6,096.00	-1,171.00	-763.72	1,150.84	1,216.71	0.00	0.00	0.00
6,800.00	90.00	89.78	6,096.00	-1,171.00	-763.33	1,250.84	1,316.25	0.00	0.00	0.00
6,900.00	90.00	89.78	6,096.00	-1,171.00	-762.95	1,350.84	1,415.78	0.00	0.00	0.00
7,000.00	90.00	89.78	6,096.00	-1,171.00	-762.56	1,450.84	1,515.31	0.00	0.00	0.00

Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well SHULL FED 31-32-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Site:	NE NW SEC. 31 T9N R59W 6th P.M.	North Reference:	True
Well:	SHULL FED 31-32-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #1		

Planned Survey										
MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,100.00	90.00	89.78	6,096.00	-1,171.00	-762.18	1,550.84	1,614.84	0.00	0.00	0.00
7,200.00	90.00	89.78	6,096.00	-1,171.00	-761.80	1,650.84	1,714.38	0.00	0.00	0.00
7,300.00	90.00	89.78	6,096.00	-1,171.00	-761.41	1,750.84	1,813.91	0.00	0.00	0.00
7,400.00	90.00	89.78	6,096.00	-1,171.00	-761.03	1,850.84	1,913.44	0.00	0.00	0.00
7,500.00	90.00	89.78	6,096.00	-1,171.00	-760.65	1,950.84	2,012.97	0.00	0.00	0.00
7,600.00	90.00	89.78	6,096.00	-1,171.00	-760.26	2,050.84	2,112.51	0.00	0.00	0.00
7,700.00	90.00	89.78	6,096.00	-1,171.00	-759.88	2,150.84	2,212.04	0.00	0.00	0.00
7,800.00	90.00	89.78	6,096.00	-1,171.00	-759.50	2,250.84	2,311.57	0.00	0.00	0.00
7,900.00	90.00	89.78	6,096.00	-1,171.00	-759.12	2,350.84	2,411.11	0.00	0.00	0.00
8,000.00	90.00	89.78	6,096.00	-1,171.00	-758.73	2,450.84	2,510.64	0.00	0.00	0.00
8,100.00	90.00	89.78	6,096.00	-1,171.00	-758.35	2,550.83	2,610.17	0.00	0.00	0.00
8,200.00	90.00	89.78	6,096.00	-1,171.00	-757.97	2,650.83	2,709.70	0.00	0.00	0.00
8,300.00	90.00	89.78	6,096.00	-1,171.00	-757.58	2,750.83	2,809.24	0.00	0.00	0.00
8,400.00	90.00	89.78	6,096.00	-1,171.00	-757.20	2,850.83	2,908.77	0.00	0.00	0.00
8,500.00	90.00	89.78	6,096.00	-1,171.00	-756.82	2,950.83	3,008.30	0.00	0.00	0.00
8,600.00	90.00	89.78	6,096.00	-1,171.00	-756.44	3,050.83	3,107.84	0.00	0.00	0.00
8,700.00	90.00	89.78	6,096.00	-1,171.00	-756.06	3,150.83	3,207.37	0.00	0.00	0.00
8,800.00	90.00	89.78	6,096.00	-1,171.00	-755.67	3,250.83	3,306.90	0.00	0.00	0.00
8,900.00	90.00	89.78	6,096.00	-1,171.00	-755.29	3,350.83	3,406.43	0.00	0.00	0.00
9,000.00	90.00	89.78	6,096.00	-1,171.00	-754.91	3,450.83	3,505.97	0.00	0.00	0.00
9,100.00	90.00	89.78	6,096.00	-1,171.00	-754.53	3,550.83	3,605.50	0.00	0.00	0.00
9,200.00	90.00	89.78	6,096.00	-1,171.00	-754.15	3,650.83	3,705.03	0.00	0.00	0.00
9,300.00	90.00	89.78	6,096.00	-1,171.00	-753.77	3,750.83	3,804.57	0.00	0.00	0.00
9,400.00	90.00	89.78	6,096.00	-1,171.00	-753.38	3,850.83	3,904.10	0.00	0.00	0.00
9,500.00	90.00	89.78	6,096.00	-1,171.00	-753.00	3,950.82	4,003.63	0.00	0.00	0.00
9,600.00	90.00	89.78	6,096.00	-1,171.00	-752.62	4,050.82	4,103.16	0.00	0.00	0.00
9,700.00	90.00	89.78	6,096.00	-1,171.00	-752.24	4,150.82	4,202.70	0.00	0.00	0.00
9,800.00	90.00	89.78	6,096.00	-1,171.00	-751.86	4,250.82	4,302.23	0.00	0.00	0.00
9,900.00	90.00	89.78	6,096.00	-1,171.00	-751.48	4,350.82	4,401.76	0.00	0.00	0.00
10,000.00	90.00	89.78	6,096.00	-1,171.00	-751.10	4,450.82	4,501.30	0.00	0.00	0.00
10,100.00	90.00	89.78	6,096.00	-1,171.00	-750.72	4,550.82	4,600.83	0.00	0.00	0.00
10,200.00	90.00	89.78	6,096.00	-1,171.00	-750.34	4,650.82	4,700.36	0.00	0.00	0.00
10,300.00	90.00	89.78	6,096.00	-1,171.00	-749.96	4,750.82	4,799.90	0.00	0.00	0.00
10,400.00	90.00	89.78	6,096.00	-1,171.00	-749.58	4,850.82	4,899.43	0.00	0.00	0.00
10,500.00	90.00	89.78	6,096.00	-1,171.00	-749.20	4,950.82	4,998.96	0.00	0.00	0.00
10,600.00	90.00	89.78	6,096.00	-1,171.00	-748.82	5,050.82	5,098.49	0.00	0.00	0.00
10,700.00	90.00	89.78	6,096.00	-1,171.00	-748.44	5,150.82	5,198.03	0.00	0.00	0.00
10,800.00	90.00	89.78	6,096.00	-1,171.00	-748.06	5,250.82	5,297.56	0.00	0.00	0.00
10,900.00	90.00	89.78	6,096.00	-1,171.00	-747.68	5,350.81	5,397.09	0.00	0.00	0.00
11,000.00	90.00	89.78	6,096.00	-1,171.00	-747.30	5,450.81	5,496.63	0.00	0.00	0.00
11,100.00	90.00	89.78	6,096.00	-1,171.00	-746.92	5,550.81	5,596.16	0.00	0.00	0.00
11,200.00	90.00	89.78	6,096.00	-1,171.00	-746.54	5,650.81	5,695.69	0.00	0.00	0.00
11,300.00	90.00	89.78	6,096.00	-1,171.00	-746.16	5,750.81	5,795.23	0.00	0.00	0.00
11,400.00	90.00	89.78	6,096.00	-1,171.00	-745.78	5,850.81	5,894.76	0.00	0.00	0.00
11,500.00	90.00	89.78	6,096.00	-1,171.00	-745.40	5,950.81	5,994.29	0.00	0.00	0.00
11,600.00	90.00	89.78	6,096.00	-1,171.00	-745.02	6,050.81	6,093.83	0.00	0.00	0.00
11,700.00	90.00	89.78	6,096.00	-1,171.00	-744.64	6,150.81	6,193.36	0.00	0.00	0.00
11,800.00	90.00	89.78	6,096.00	-1,171.00	-744.26	6,250.81	6,292.89	0.00	0.00	0.00
11,900.00	90.00	89.78	6,096.00	-1,171.00	-743.88	6,350.81	6,392.43	0.00	0.00	0.00
12,000.00	90.00	89.78	6,096.00	-1,171.00	-743.51	6,450.81	6,491.96	0.00	0.00	0.00
12,100.00	90.00	89.78	6,096.00	-1,171.00	-743.13	6,550.81	6,591.49	0.00	0.00	0.00
12,200.00	90.00	89.78	6,096.00	-1,171.00	-742.75	6,650.80	6,691.02	0.00	0.00	0.00
12,300.00	90.00	89.78	6,096.00	-1,171.00	-742.37	6,750.80	6,790.56	0.00	0.00	0.00
12,400.00	90.00	89.78	6,096.00	-1,171.00	-741.99	6,850.80	6,890.09	0.00	0.00	0.00

Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well SHULL FED 31-32-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4925.00usft (Original Well Elev)
Site:	NE NW SEC. 31 T9N R59W 6th P.M.	North Reference:	True
Well:	SHULL FED 31-32-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #1		

Planned Survey										
MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,500.00	90.00	89.78	6,096.00	-1,171.00	-741.61	6,950.80	6,989.62	0.00	0.00	0.00
12,600.00	90.00	89.78	6,096.00	-1,171.00	-741.24	7,050.80	7,089.16	0.00	0.00	0.00
12,700.00	90.00	89.78	6,096.00	-1,171.00	-740.86	7,150.80	7,188.69	0.00	0.00	0.00
12,800.00	90.00	89.78	6,096.00	-1,171.00	-740.48	7,250.80	7,288.22	0.00	0.00	0.00
12,900.00	90.00	89.78	6,096.00	-1,171.00	-740.10	7,350.80	7,387.76	0.00	0.00	0.00
13,000.00	90.00	89.78	6,096.00	-1,171.00	-739.72	7,450.80	7,487.29	0.00	0.00	0.00
13,100.00	90.00	89.78	6,096.00	-1,171.00	-739.35	7,550.80	7,586.82	0.00	0.00	0.00
13,200.00	90.00	89.78	6,096.00	-1,171.00	-738.97	7,650.80	7,686.36	0.00	0.00	0.00
13,300.00	90.00	89.78	6,096.00	-1,171.00	-738.59	7,750.80	7,785.89	0.00	0.00	0.00
13,400.00	90.00	89.78	6,096.00	-1,171.00	-738.21	7,850.80	7,885.42	0.00	0.00	0.00
BHL: 1705ft FNL & 460ft FEL of Sec 32										
13,471.96	90.00	89.78	6,096.00	-1,171.00	-737.94	7,922.76	7,957.05	0.00	0.00	0.00

Formations						
MD (usft)	TVD (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
508.00	508.00	Fox Hills Base				
1,446.00	1,446.00	Pierre Shale Top				
3,278.50	3,234.00	Richard Sandstone				
3,404.71	3,355.00	Parkman Sandstone				
4,117.10	4,038.00	Sussex Sandstone				
4,627.14	4,527.00	Shannon Sandstone				
6,079.40	5,922.00	Sharon Springs				
6,178.80	5,987.00	Niobrara A Chalk				
6,233.63	6,017.00	Niobrara A Chalk Base				
6,325.46	6,057.00	Niobrara B1 Chalk Top				
6,378.79	6,074.00	Niobrara B1 Chalk Base				
6,538.08	6,096.00	Niobrara B2 Chalk Top (Target)				

Plan Annotations				
MD (usft)	TVD (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
0.00	0.00	0.00	0.00	SHL: 942ft FNL & 2148ft FWL of Sec 31
1,650.00	1,650.00	0.00	0.00	START NUDGE (2°/100ft BUR)
2,475.72	2,464.33	-103.87	56.37	EOB TO 16.51° INC
4,712.36	4,608.71	-662.67	359.60	END OF TANGENT
5,538.08	5,423.04	-766.54	415.97	EOD TO VERTICAL
5,638.08	5,523.04	-766.54	415.97	KOP (10°/100ft BUR)
6,538.08	6,096.00	-764.34	988.92	HZ LP: 1705ft FNL & 2140ft FEL of Sec 31
13,471.96	6,096.00	-737.94	7,922.76	BHL: 1705ft FNL & 460ft FEL of Sec 32