


Mean
Max Excursion
Min Excursion

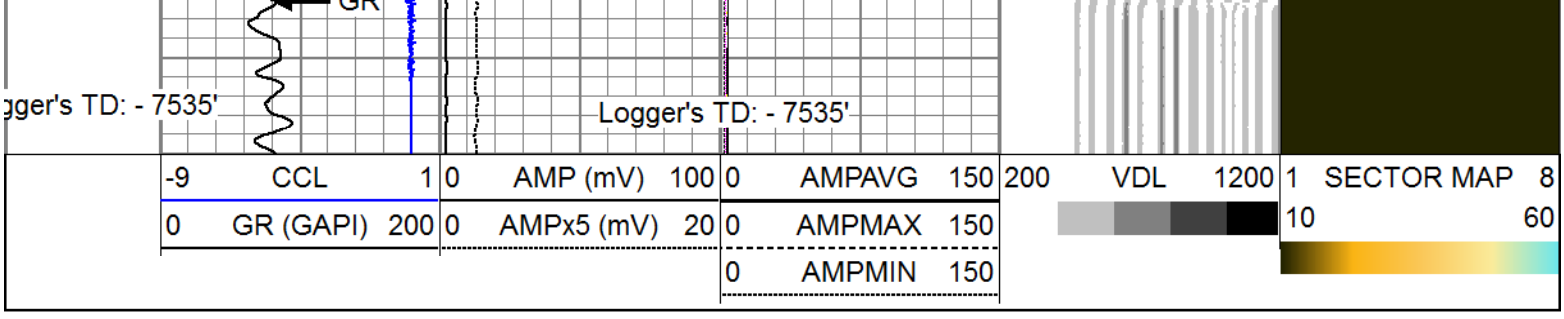

Calibration Report

Database File: 13826.db
Dataset Pathname: pass2
Dataset Creation: Fri Oct 31 22:44:22 2014 by Log 0

Gamma Ray Calibration Report

Serial Number:	51013	
Tool Model:	probe 2.75	
Performed:	Thu Oct 23 02:18:02 2014	
Calibrator Value:	1400.0	GAPI
Background Reading:	26.8	cps
Calibrator Reading:	1120.0	cps
Sensitivity:	1.0000	GAPI/cps

Segmented Cement Bond Log Calibration Report

Serial Number:	130584	
Tool Model:	RBT-C3	
Calibration Casing Diameter:	7.000	in
Calibration Depth:	145.996	ft

Master Calibration, performed Sun Oct 26 10:18:34 2014:

	Raw (v)		Calibrated (mv)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
3'	0.012	0.378	1.500	62.165	69.000	-0.570
CAL	0.012	1.029				
5'	0.012	0.239	1.500	62.165	70.000	-1.811
SUM						
S1	0.010	0.384	0.000	100.000	102.000	-2.698
S2	0.012	0.425	0.000	100.000	101.000	-3.023
S3	0.012	0.441	0.000	100.000	102.500	-2.894
S4	0.012	0.420	0.000	100.000	103.000	-3.034
S5	0.012	0.378	0.000	100.000	104.000	-3.372
S6	0.010	0.352	0.000	100.000	105.000	-2.925
S7	0.012	0.346	0.000	100.000	102.000	-3.679
S8	0.012	0.362	0.000	100.000	103.000	-3.547

Internal Reference Calibration, performed Wed Dec 31 17:00:00 1969:

	Raw (v)		Calibrated (v)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
CAL	0.000	0.000	0.012	1.029	1.000	0.000

Air Zero Calibration, performed Mon Sep 08 11:38:23 2014:

	Raw (v)	Calibrated (v)	Results
	Zero	Zero	Offset
3'	0.000	0.000	0.000
5'	0.000	0.000	0.000
SUM			
S1	0.000	0.000	0.000
S2	0.000	0.000	0.000
S3	0.000	0.000	0.000
S4	0.000	0.000	0.000
S5	0.000	0.000	0.000
S6	0.000	0.000	0.000
S7	0.000	0.000	0.000
S8	0.000	0.000	0.000

Temperature Calibration Report

Serial Number:	130584			
Tool Model:	RBT-C3			
Performed:	Wed Aug 13 16:18:33 2014			
	Reference		Reading	
Low Reference:	0.00	degF	0.00	degF
High Reference:	1.00	degF	1.00	degF
Gain:	0.77			
Offset:	15.00			
Delta Spacing	1			

Log Variables

Database:C:\Warrior\Data\13826.db
Dataset: field/well/run1/pass2

Top - Bottom

PPT usec	CASEWGHT lb/ft	MAXAMPL mV	MINAMPL mV	MINATTN db/ft	CASEOD in	PERFS
0	26	0	1.5	0.08	7	0

TDEPTH ft	BOTTEMP degF	BOREID in
0	197	8.75