Schlumberger
Gamma Ray (GAPI)
Cable Speed (FPM)
Tension (LBF)
Line Speed (FPM)
Gamma Ray (GAPI)
Cable Speed (FPM)
Tension (LBF)
Line Speed (FPM)
Schlumberger



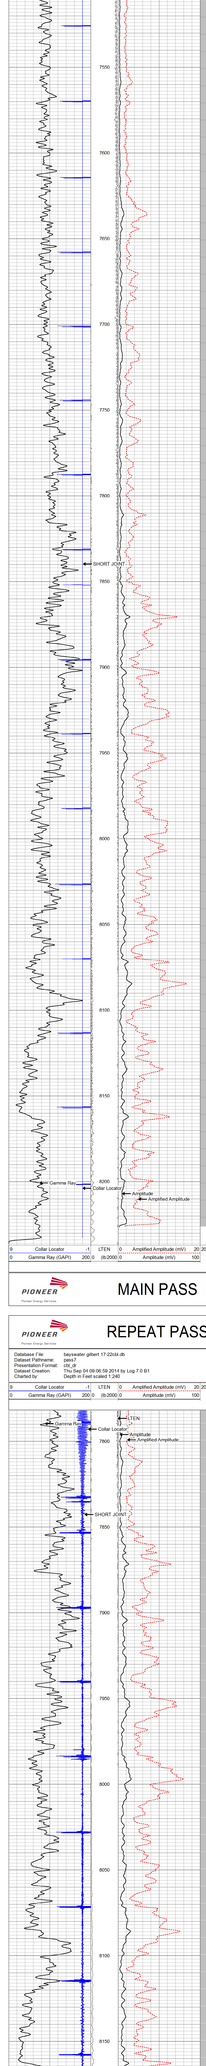

9	Collar Locator	-1	LTEN	0	Amplified Amplitude (mV)	20 200	Variable Density 1200
0	Gamma Ray (GAPI)	200	(lb 2000)	0	Amplitude (mV)	100	

PIONEER
Pioneer Energy Services

MAIN PASS 0 PSI

PIONEER
Pioneer Energy Services

REPEAT PASS 0 PSI

Database File: bayswater gilbert 17-22cbl.db
Dataset Pathname: pass7
Presentation Format: cbl
Dataset Creation: Thu Sep 04 09:06:59 2014 by Log 7.0 B1
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	LTEN	0	Amplified Amplitude (mV)	20 200	Variable Density 1200
0	Gamma Ray (GAPI)	200	(lb 2000)	0	Amplitude (mV)	100	

PIONEER
Pioneer Energy Services

REPEAT PASS 0 PSI

Database File: bayswater gilbert 17-22cbl db
Dataset Pathname: pass6-2
Dataset Creation: Thu Sep 04 10:42:05 2014 by Calc 7.0 B1

Calibration Report

Gamma Ray Calibration Report

Serial Number:	pr050806		
Tool Model:	Probe2754g		
Performed:	Fri Jun 27 12:28:55 2014		
Calibrator Value:	240.0	GAPI	
Background Reading:	79.3	cps	
Calibrator Reading:	459.5	cps	
Sensitivity:	0.8000	GAPI/cps	

Cement Bond Log Calibration Report

Serial Number:	121070		
Tool Model:	Digital		
Performed:	Thu Sep 04 08:36:54 2014		
Depth:	120.982	ft	
Casing Diameter:	4.5	in	
	3' Spacing	5' Spacing	
Signal Zero:	1	1	mV
Calibrated Amplitude:	83	83	mV
Reading at Signal Zero:	-0.80744429	-0.807357746	V
Reading in Free Pipe:	1.12102	0.941846	V
Gain:	72.895	86.3846	
Offset:	1.54108	1.83063	

PIONEER
Pioneer Energy Services

Company	BAYSWATER E & P
Well	GILBERT 17-22
Field	WATTENBERG
County	WELD
State	COLORADO