THE WIRELINE GROUP

Cement Bond Log
Gamma Ray
CCL

Company	Red Mesa
Well	Greer # 34-3
Field	Red Mesa
County	La Plata
State	CO

Company Red Mesa
Well Greer # 34-3
Field Red Mesa
County La Plata State CO
Location: API # : 05-067-09864
SEC TWP 33N RGE 12W

Other Services
GR/JB
4.5" Plug

Permanent Datum Ground Level Elevation 6518'
Log Measured From K.B. 6'
Drilling Measured From Kelly Bushing

Elevation
K.B.
D.F.
G.L. 6518'

Date	6/21/21
Run Number	One
Depth Driller	3671'
Depth Logger	3425'
Bottom Logged Interval	3425'
Top Log Interval	Surface
Open Hole Size	6.25"
Type Fluid	Water
Density / Viscosity	N/A
Max. Recorded Temp.	N/A
Estimated Cement Top	See Log
Time Well Ready	ROA
Time Logger on Bottom	See Log
Equipment Number	8030
Location	Farmington
Recorded By	D.Girodo
Witnessed By	

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	9-5/8"		Surface	370'
Prot. String	7"		Surface	1670'
Production String	4-1/2"		1458'	3665'
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for choosing The Wireline Group.
Log was ran with an unknown K.B.
Log was ran with 0 PSI @ surface

Database File:	delscogreer34-3.db
Dataset Pathname:	merge1
Presentation Format:	cbldig
Dataset Creation:	Fri Jan 01 07:18:12 2010
Charted by:	Depth in Feet scaled 1:240

360	Travel Time (usec)	260	0	Amplitude (mV)	100	200 Variable Density 1200
-20	Collar Locator	1	0	Amplified Amplitude (mV)	10	
0	GR (GAPI)	150				

360	Travel Time (usec)	260	0	Amplitude (mV)	100	200 Variable Density 1200
-20	Collar Locator	1	0	Amplified Amplitude (mV)	10	
0	GR (GAPI)	150				

Database File:	delscogreer34-3.db
Dataset Pathname:	pass10
Presentation Format:	cbldig
Dataset Creation:	Fri Jan 01 02:28:26 2010 by Log SCH 110223
Charted by:	Depth in Feet scaled 1:240

360	Travel Time (usec)	260	0	Amplitude (mV)	100	200 Variable Density 1200
-20	Collar Locator	1	0	Amplified Amplitude (mV)	10	
0	GR (GAPI)	200				

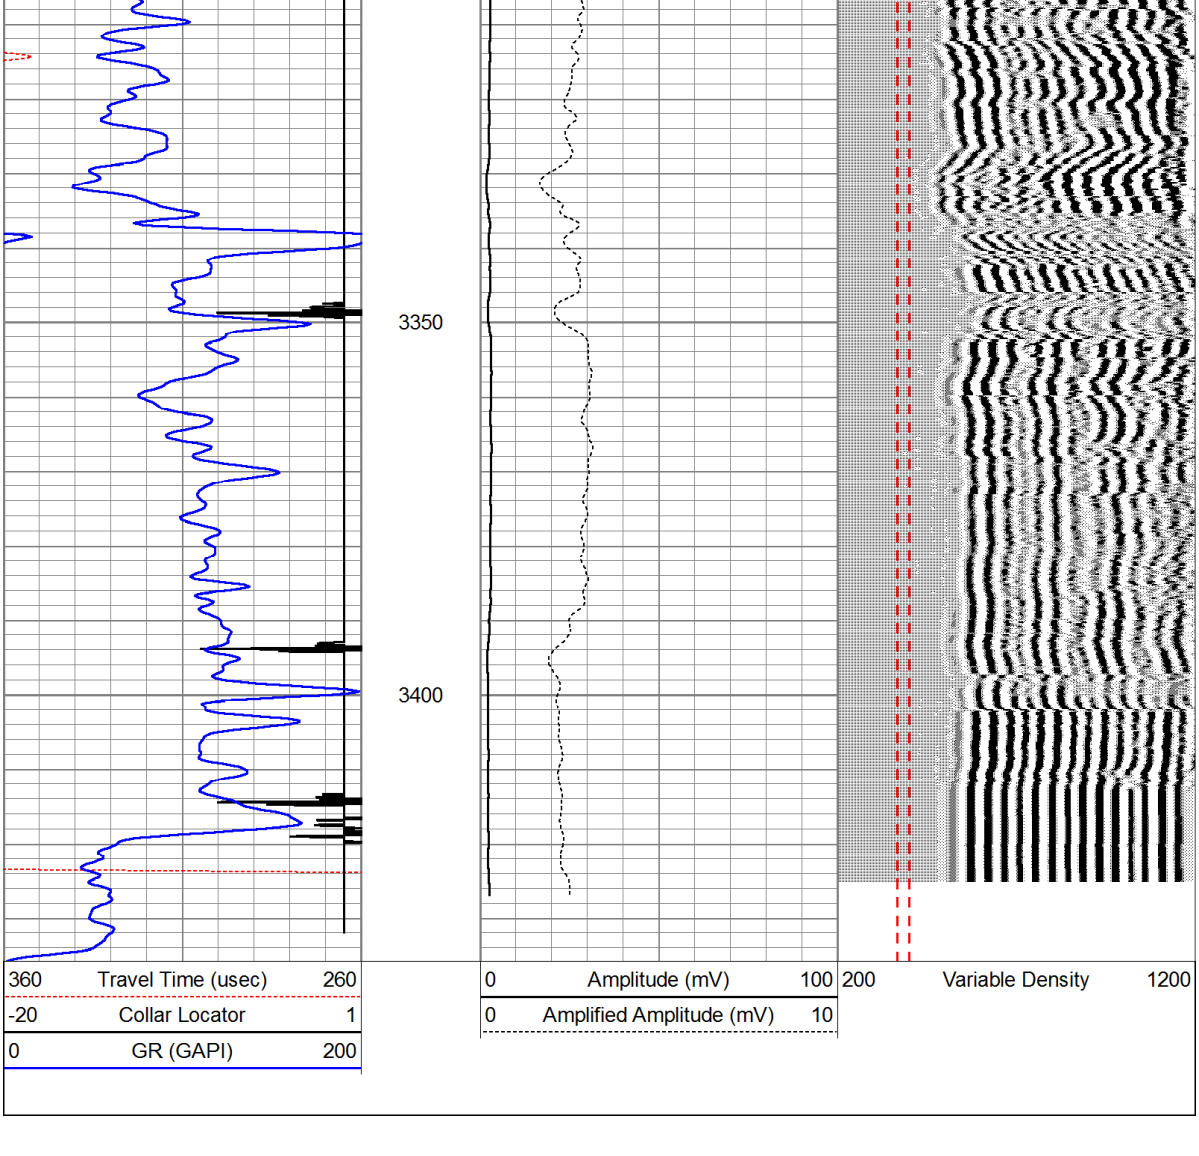

360	Travel Time (usec)	260	0	Amplitude (mV)	100	200 Variable Density 1200
-20	Collar Locator	1	0	Amplified Amplitude (mV)	10	
0	GR (GAPI)	200				

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)