

FORM
2A

Rev
08/13

State of Colorado
Oil and Gas Conservation Commission

1120 Lincoln Street, Suite 801, Denver, Colorado 80203
Phone: (303) 894-2100 Fax: (303) 894-2109



Document Number:

401145964

(SUBMITTED)

Date Received:

Oil and Gas Location Assessment

☒ New Location ☐ Refile ☐ Amend Existing Location Location#: _____

This Oil and Gas Location Assessment is to be submitted to the COGCC for approval prior to any ground disturbance activity associated with oil and gas operations. Approval of this Oil and Gas Location Assessment will allow for the construction of the below specified Location; however, it does not supersede any land use rules applied by the local land use authority. Please see the COGCC website at <http://cogcc.state.co.us/> for all accompanying information pertinent this Oil and Gas Location Assessment.

Location ID:

Expiration Date:

☐ This location assessment is included as part of a permit application.

CONSULTATION

- ☐ This location is included in a Comprehensive Drilling Plan. CDP # _____
- ☐ This location is in a sensitive wildlife habitat area.
- ☐ This location is in a wildlife restricted surface occupancy area.
- ☐ This location includes a Rule 306.d.(1)A.ii. variance request.

Operator

Operator Number: 10518

Name: EDGE ENERGY LLC

Address: 621 17TH STREET SUITE 1401

City: DENVER State: CO Zip: 80293

Contact Information

Name: Shauna Demattee

Phone: (720) 359-1612

Fax: ()

email: sdemattee@progressivepcs.net

RECLAMATION FINANCIAL ASSURANCE

☒ Plugging and Abandonment Bond Surety ID: 20160056

☐ Gas Facility Surety ID: _____

☐ Waste Management Surety ID: _____

LOCATION IDENTIFICATION

Name: Cherry Knolls West

Number: Pad

County: WELD

QuarterQuarter: NWSW Section: 33 Township: 1N Range: 65W Meridian: 6 Ground Elevation: 5099

Define a single point as a location reference for the facility location. When the location is to be used as a well site then the point shall be a well location.

Footage at surface: 2443 feet FSL from North or South section line

924 feet FWL from East or West section line

Latitude: 40.007240 Longitude: -104.675150

PDOP Reading: 1.8 Date of Measurement: 10/20/2016

Instrument Operator's Name: Casey Kohout

RELATED REMOTE LOCATIONS

(Enter as many Related Locations as necessary. Enter the Form 2A document # only if there is no established COGCC Location ID#)

This proposed Oil and Gas Location is:

LOCATION ID #

FORM 2A DOC #

FACILITIES

Indicate the number of each type of oil and gas facility planned on location

Wells	12	Oil Tanks*	14	Condensate Tanks*		Water Tanks*	4	Buried Produced Water Vaults*	1
Drilling Pits		Production Pits*		Special Purpose Pits		Multi-Well Pits*		Modular Large Volume Tanks	
Pump Jacks		Separators*	12	Injection Pumps*		Cavity Pumps*		Gas Compressors*	
Gas or Diesel Motors*		Electric Motors		Electric Generators*		Fuel Tanks*		LACT Unit*	
Dehydrator Units*		Vapor Recovery Unit*		VOC Combustor*	3	Flare*		Pigging Station*	

OTHER FACILITIES*

Other Facility Type

Number

Meter House

1

Those facilities indicated by an asterisk () shall be used to determine the distance from the Production Facility to the nearest cultural feature on the Cultural Setbacks Tab.

Per Rule 303.b.(3)C, description of all oil, gas, and/or water pipelines:

2" and/or 3" Schedule 40 steel flowlines, carrying oil, gas, and water from wellheads to production equipment and sales.

CONSTRUCTION

Date planned to commence construction: 01/20/2017

Size of disturbed area during construction in acres: 10.00

Estimated date that interim reclamation will begin: 05/20/2017

Size of location after interim reclamation in acres: 8.00

Estimated post-construction ground elevation: 5099

DRILLING PROGRAM

Will a closed loop system be used for drilling fluids: Yes

Is H₂S anticipated? No

Will salt sections be encountered during drilling: No

Will salt based mud (>15,000 ppm Cl) be used? No

Will oil based drilling fluids be used? No

DRILLING WASTE MANAGEMENT PROGRAM

Drilling Fluids Disposal: OFFSITE

Drilling Fluids Disposal Method: Commercial Disposal

Cutting Disposal: OFFSITE

Cuttings Disposal Method: Commercial Disposal

Other Disposal Description:

Beneficial reuse or land application plan submitted? _____

Reuse Facility ID: _____ or Document Number: _____

Centralized E&P Waste Management Facility ID, if applicable: _____

SURFACE & MINERALS & RIGHT TO CONSTRUCT

Name: Cherry Knolls Estate, LLP

Phone: _____

Address: 8791 Circle Drive

Fax: _____

Address: _____

Email: _____

City: Westminster State: CO Zip: 80031

Surface Owner: ☒ Fee ☐ State ☐ Federal ☐ Indian

Check all that apply. The Surface Owner: ☐ is the mineral owner

☐ is committed to an oil and Gas Lease

☐ has signed the Oil and Gas Lease

☐ is the applicant

The Mineral Owner beneath this Oil and Gas Location is: ☒ Fee ☐ State ☐ Federal ☐ Indian

The Minerals beneath this Oil and Gas Location will be developed from or produced to this Oil and Gas Location: Yes

The right to construct this Oil and Gas Location is granted by: Surface Use Agreement

Surface damage assurance if no agreement is in place: _____ Surface Surety ID: _____

Date of Rule 306 surface owner consultation 09/01/2015

CURRENT AND FUTURE LAND USE

Current Land Use (Check all that apply):

Crop Land: ☐ Irrigated ☐ Dry land ☐ Improved Pasture ☒ Hay Meadow ☐ CRP

Non-Crop Land: ☐ Rangeland ☐ Timber ☐ Recreational ☐ Other (describe): _____

Subdivided: ☐ Industrial ☐ Commercial ☐ Residential

Future Land Use (Check all that apply):

Crop Land: ☐ Irrigated ☐ Dry land ☐ Improved Pasture ☒ Hay Meadow ☐ CRP

Non-Crop Land: ☐ Rangeland ☐ Timber ☐ Recreational ☐ Other (describe): _____

Subdivided: ☐ Industrial ☐ Commercial ☐ Residential

CULTURAL DISTANCE INFORMATION

Provide the distance to the nearest cultural feature as measured from Wells or Production Facilities onsite.

	From WELL	From PRODUCTION FACILITY
Building:	1992 Feet	1616 Feet
Building Unit:	1992 Feet	1616 Feet
High Occupancy Building Unit:	5280 Feet	5280 Feet
Designated Outside Activity Area:	5280 Feet	5280 Feet
Public Road:	2427 Feet	2073 Feet
Above Ground Utility:	981 Feet	335 Feet
Railroad:	5280 Feet	5280 Feet
Property Line:	205 Feet	5 Feet

INSTRUCTIONS:

- All measurements shall be provided from center of nearest Well or edge of nearest Production Facility to nearest of each cultural feature as described in Rule 303.b.(3)A.
- Enter 5280 for distance greater than 1 mile.
- Building - nearest building of any type. If nearest Building is a Building Unit, enter same distance for both.
- Building Unit, High Occupancy Building Unit, and Designated Outside Activity Area - as defined in 100-Series Rules.
- For measurement purposes only, Production Facilities should only include those items with an asterisk(*) on the Facilities Tab.

DESIGNATED SETBACK LOCATION INFORMATION

Check all that apply. This location is within a:

- ☐ Buffer Zone
- ☐ Exception Zone
- ☐ Urban Mitigation Area

- Buffer Zone - as described in Rule 604.a.(2), within 1,000' of a Building Unit.
- Exception Zone - as described in Rule 604.a.(1), within 500' of a Building Unit.
- Urban Mitigation Area - as defined in 100-Series Rules.
- Large UMA Facility - as defined in 100-Series Rules.

Pre-application Notifications (required if location is within 1,000 feet of a building unit):

Date of Rule 305.a.(1) Urban Mitigation Area Notification to Local Government: _____

Date of Rule 305.a.(2) Buffer Zone Notification to Building Unit Owners: _____

FOR MULTI-WELL PADS AND PRODUCTION FACILITIES WITHIN DESIGNATED SETBACK LOCATIONS ONLY:

- ☐ Check this box if this Oil and Gas Location has or will have Production Facilities that serve multiple wells (on or offsite) and the Production Facilities are proposed to be located less than 1,000 feet from a Building Unit. *(Pursuant to Rule 604.c.(2)E.i., the operator must evaluate alternative locations for the Production Facilities that are farther from the Building Unit, and determine whether those alternative locations were technically feasible and economically practicable for the same proposed development.)*
- ☐ By checking this box, I certify that no alternative placements for the Production Facilities, farther from the nearest Building Unit, were available based on the analysis conducted pursuant to Rule 604.c.(2)E.i.

In the space below, explain rationale for siting the multi-well Production Facility(ies) that supports your Rule 604.c.(2)E.i determination. Attach documentation that supports your determination to this Form 2A.

SOIL

List all soil map units that occur within the proposed location. attach the National Resource Conservation Service (NRCS) report showing the "Map Unit Description" report listing the soil typical vertical profile. This data is to be used when segregating topsoil.

The required information can be obtained from the NRCS web site at <http://soildatamart.nrcs.usda.org/> or from the COGCC web site GIS Online map page found at <http://colorado.gov/cogcc>. Instructions are provided within the COGCC web site help section.

NRCS Map Unit Name: 73—Vona loamy sand, 3 to 5 percent slopes

NRCS Map Unit Name: 5—Ascalon sandy loam, 0 to 3 percent slopes

NRCS Map Unit Name: 76—Vona sandy loam, 1 to 3 percent slopes

PLANT COMMUNITY:

Complete this section only if any portion of the disturbed area of the location's current land use is on non-crop land.

Are noxious weeds present: Yes ☐ No ☒

Plant species from: ☐ NRCS or, ☐ field observation Date of observation: _____

List individual species:

Check all plant communities that exist in the disturbed area.

- ☐ Disturbed Grassland (Cactus, Yucca, Cheatgrass, Rye)
- ☐ Native Grassland (Bluestem, Grama, Wheatgrass, Buffalograss, Fescue, Oatgrass, Brome)
- ☐ Shrub Land (Mahogany, Oak, Sage, Serviceberry, Chokecherry)
- ☐ Plains Riparian (Cottonwood, Willow, Aspen, Maple, Poplar, Russian Olive, Tamarisk)
- ☐ Mountain Riparian (Cottonwood, Willow, Blue Spruce)
- ☐ Forest Land (Spruce, Fir, Ponderosa Pine, Lodgepole Pine, Juniper, Pinyon, Aspen)
- ☐ Wetlands Aquatic (Bullrush, Sedge, Cattail, Arrowhead)
- ☐ Alpine (above timberline)
- ☐ Other (describe): _____

WATER RESOURCES

Is this a sensitive area: ☐ No ☒ Yes

Distance to nearest

downgradient surface water feature: 22 Feet

water well: 1705 Feet

Estimated depth to ground water at Oil and Gas Location 87 Feet

Basis for depth to groundwater and sensitive area determination:

Sensitive area determination based on distance to canal, 22' SW
Nearest water well was measured to Receipt 9062581 (permit 19140), Depth to ground water was estimated based on static water level of the water well.

Is the location in a riparian area: ☒ No ☐ Yes

Was an Army Corps of Engineers Section 404 permit filed ☒ No ☐ Yes If yes attach permit.

Is the location within a Rule 317B Surface Water Supply Area buffer No
zone:

If the location is within a Rule 317B Surface Water Supply Area buffer have all public water supply systems within 15 miles been notified: _____

Is the Location within a Floodplain? ☒ No ☐ Yes Floodplain Data Sources Reviewed (check all that apply)

☒ Federal (FEMA)

☒ State

☐ County

☐ Local

☐ Other

GROUNDWATER BASELINE SAMPLING AND MONITORING AND WATER WELL SAMPLING

Water well sampling required per Rule 318A

WILDLIFE



This location is included in a Wildlife Mitigation Plan

☐ This location was subject to a pre-consultation meeting with CPW held on _____

Operator Proposed Wildlife BMPs

No BMP

DESIGNATED SETBACK LOCATION EXCEPTIONS

Check all that apply:

- ☐ Rule 604.a.(1)A. Exception Zone (within 500' of a Building Unit) and is in an Urban Mitigation Area
- ☐ Rule 604.b.(1)A. Exception Location (existing or approved Oil & Gas Location now within a Designated Setback as a result of Rule 604.a.)
- ☐ Rule 604.b.(1)B. Exception Location (existing or approved Oil & Gas Location is within a Designated Setback due to Building Unit construction after Location approval)
- ☐ Rule 604.b.(2) Exception Location (SUA or site-specific development plan executed on or before August 1, 2013)
- ☐ Rule 604.b.(3) Exception Location (Building Units constructed after August 1, 2013 within setback per an SUA or site-specific development plan)

RULE 502.b VARIANCE REQUEST

☐ Rule 502.b. Variance Request from COGCC Rule or Spacing Order Number _____

ALL exceptions and variances require attached Request Letter(s). Refer to applicable rule for additional required attachments (e.g. waivers, certifications, SUAs).

OPERATOR COMMENTS AND SUBMITTAL

Comments Cultural distances for the facility were measured from the edge of disturbance.

Edge plans to place (1) 18,000 bbl temporary large volume above ground tanks on this location for approximately 8- days for the purpose of completing the associated pad wells. The manufacturer, Rockwater Energy Solutions Design Package and Edge Energy LLC Contingency Plan are available at Edge's offices.

I hereby certify that the statements made in this form are, to the best of my knowledge, true, correct and complete.

Signed: _____ Date: _____ Email: sdemattee@progressivepcs.net

Print Name: Shauna Demattee Title: Regulatory Analyst

Based on the information provided herein, this Application for Permit-to-Drill complies with COGCC Rules and applicable orders and is hereby approved.

COGCC Approved: _____ Director of COGCC Date: _____

Conditions Of Approval

All representations, stipulations and conditions of approval stated in this Form 2A for this location shall constitute representations, stipulations and conditions of approval for any and all subsequent operations on the location unless this Form 2A is modified by Sundry Notice, Form 4 or an Amended Form 2A.


COA Type

Description

--	--

Best Management Practices

No	<u>BMP/COA Type</u>	<u>Description</u>
1	Planning	<p>Visual Impacts: All long term facility structures will be painted a color that enables the facilities to blend in with the natural background color of the landscape, as seen from a viewing distance and location typically used by the public.</p> <p>Odors and Dust: Oil & gas facilities and equipment shall be operated in such a manner that odors and dust do not constitute a nuisance or hazard to public welfare.</p>
2	Construction	<p>Construction: Operator will provide notice to COGCC 48 hours prior to commencing construction of this Oil and Gas Location via Form 42.</p>
3	Drilling/Completion Operations	<p>Edge Energy LLC. hereby certifies to the Director that the Modular Large Volume Tanks, utilized for the afore mentioned location, will be designed and implemented consistent with the Colorado Oil and Gas Conservation Commission policy dated June 13, 2014.</p>

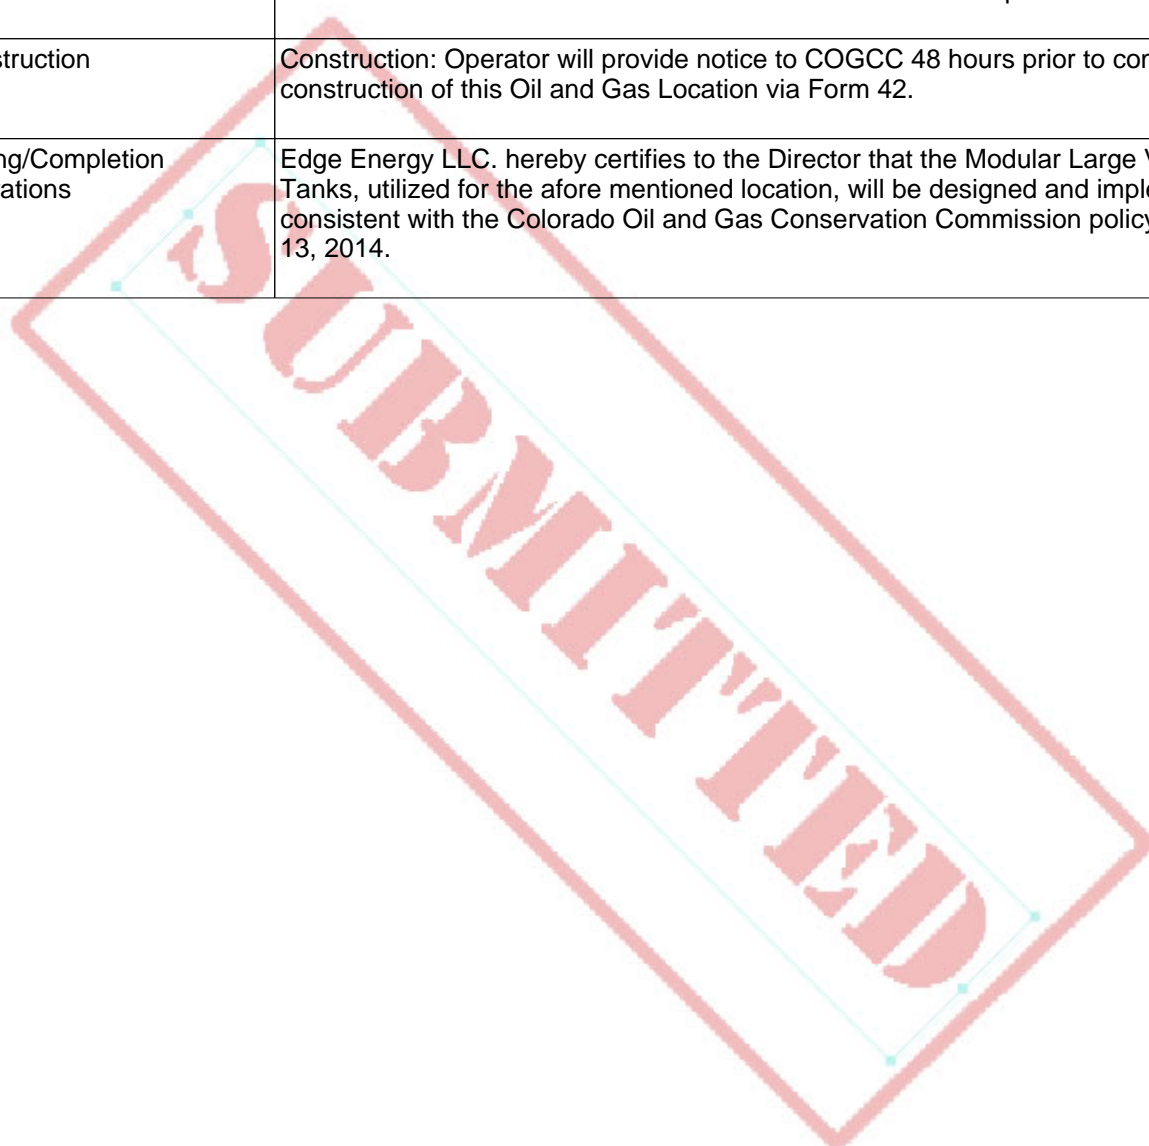

4	Drilling/Completion Operations	<p>Edge Energy, LLC. (Edge) has developed Best Management Practices (BMPS) to prevent injuries, property damage or environmental impacts and a Contingency Plan for any Modular Large Volume Tank (MLVT) leak or catastrophic failure of the tank integrity and resulting loss of fluid. These BMPs include, but not limited, by the following:</p> <ol style="list-style-type: none"> 1) Edge determines MLVT locations based on size of location, nearby surface waters, site visibility, surrounding land use, property lines, onsite traffic, site security, tearaway tank fill connections, topography (high, low, slope, direction), nearby building units, roads, access points, and surface owner requests. 2) Signs shall be posted on each MLVT to indicate that the contents are fresh water and that no E&P waste fluids are allowed. Location and additional signage shall conform to Rule 210. 3) MLVTs will be operated with a minimum of 1 foot freeboard at all times. 4) Access to the tanks shall be limited to operational personnel. 5) Construction and installation of the tank structure, liner and sub-grade shall meet or exceed the manufacturer specifications. Edge follows manufacturer's Standard Operating Procedures (SOPs) and will provide these SOPs upon request to the COGCC. 6) Edge will conduct daily, visual inspections of the exterior wall and general area for any integrity deficiencies before, during, and after filling the MLVTs. Edge uses Construction Sign-Off, Site Preparation Sign-Off, Completion Sign-Off, Pre-Fill, and Site Visit checklists to maintain a written record of inspections. However, when the fluid level in the MLVTs is less than two (2) feet and there is no activity going on (i.e. during holidays or a small break between completions), only intermittent inspections will be conducted. Two feet is the safe volume of fluid level that is needed to hold the liner down and keep the MLVT stable. 7) Each location where MLVT's are used will have its own set of unique site-specific characteristics and associated risks (e.g., rural vs. urban setting, grade of the location, etc.) to be considered in a worst case scenario. These characteristics must be identified and addressed prior to the MLVT construction phase and should be documented in the MLVT construction checklist. Ensuring the safety of our employees, contractors, and the public are a top priority. This can be addressed with the implementation of MLVT pre-construction risk assessment measures to address safety concerns, and minimize environmental impacts and property damage in the unlikely event of a MLVT release. 8) In the event of a catastrophic MLVT failure, the Operator shall notify the COGCC as soon as practicable but not more than 24 hours after discovery, submit a Form 22-Accident Report within 10 days after discovery, conduct a "root cause analysis", and provide same to COGCC on a Form 4-Sundry Notice within 30 days of the failure. 9) The MLVT shall be constructed and operated in accordance with a design package certified and sealed by a Licensed Professional Engineer either in Colorado or the state where the MLVT was designed or manufactured. 10) COGCC Rules 605.a.(3,5,6,7, and 8), as applicable to tank setbacks at the time of installation shall apply to the siting of this MLVT. 11) All MLVT liner seams shall be welded and tested in accordance with applicable ASTM international standards. Any repairs to liners shall be made using acceptable practices and applicable standards. 	
---	--------------------------------	--	--

Total: 4 comment(s)

Attachment Check List

Att Doc Num**Name**

401148253	WASTE MANAGEMENT PLAN
401148258	NRCS MAP UNIT DESC
401163475	ACCESS ROAD MAP
401163476	SURFACE AGRMT/SURETY
401163477	HYDROLOGY MAP
401163478	LOCATION DRAWING
401163479	LOCATION DRAWING
401163480	MULTI-WELL PLAN
401163481	OTHER

Total Attach: 9 Files

General Comments**User Group****Comment****Comment Date**

		Stamp Upon Approval
--	--	------------------------

Total: 0 comment(s)

Public Comments

No public comments were received on this application during the comment period.

